


CHURCH OF THE ASCENSION LIMITED DEVELOPMENT ORDER - TYPE D

LOCATED IN FORT MYERS BEACH, LEE COUNTY COUNTY, FL.
SECTION 33, TOWNSHIP 46S, RANGE 24E

PROPERTY OWNER /DEVELOPER


Diocese of Venice
1000 Pinebrook Road
Venice FL 34285

PROPERTY INFORMATION	
PROPERTY ADDRESS:	6025/6029 Estero Boulevard, Fort Myers Beach, FL 33931
FOLIO ID:	1023331
STRAP NUMBER:	33-46-24-W2-00007.0000
PARCEL AREA:	14.61 ac
BASE ZONING:	Institutional/IN
ZONING OVERLAY:	n/a
SFWMD PERMIT No.:	36-02241-5, 36-103211-P

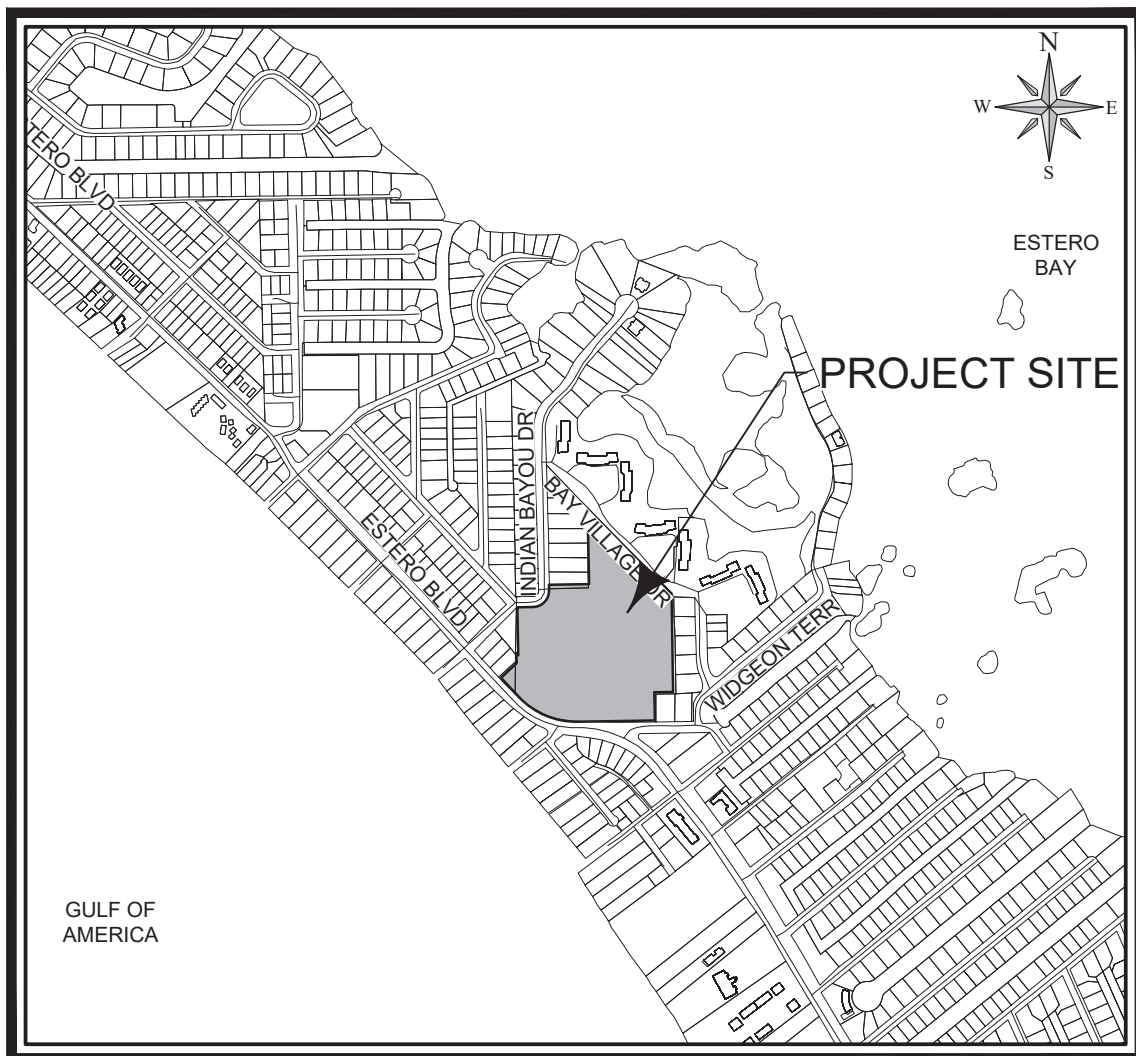

VICINITY MAP
N.T.S.

FEMA INFORMATION	
FLOOD ZONE:	AE (EL: 11.0 - 12.0)
FEMA PANEL NUMBER:	12071C0566G, 12071C0567G
FLOOD PANEL EFF. DATE:	11/17/2022, 11/17/2022

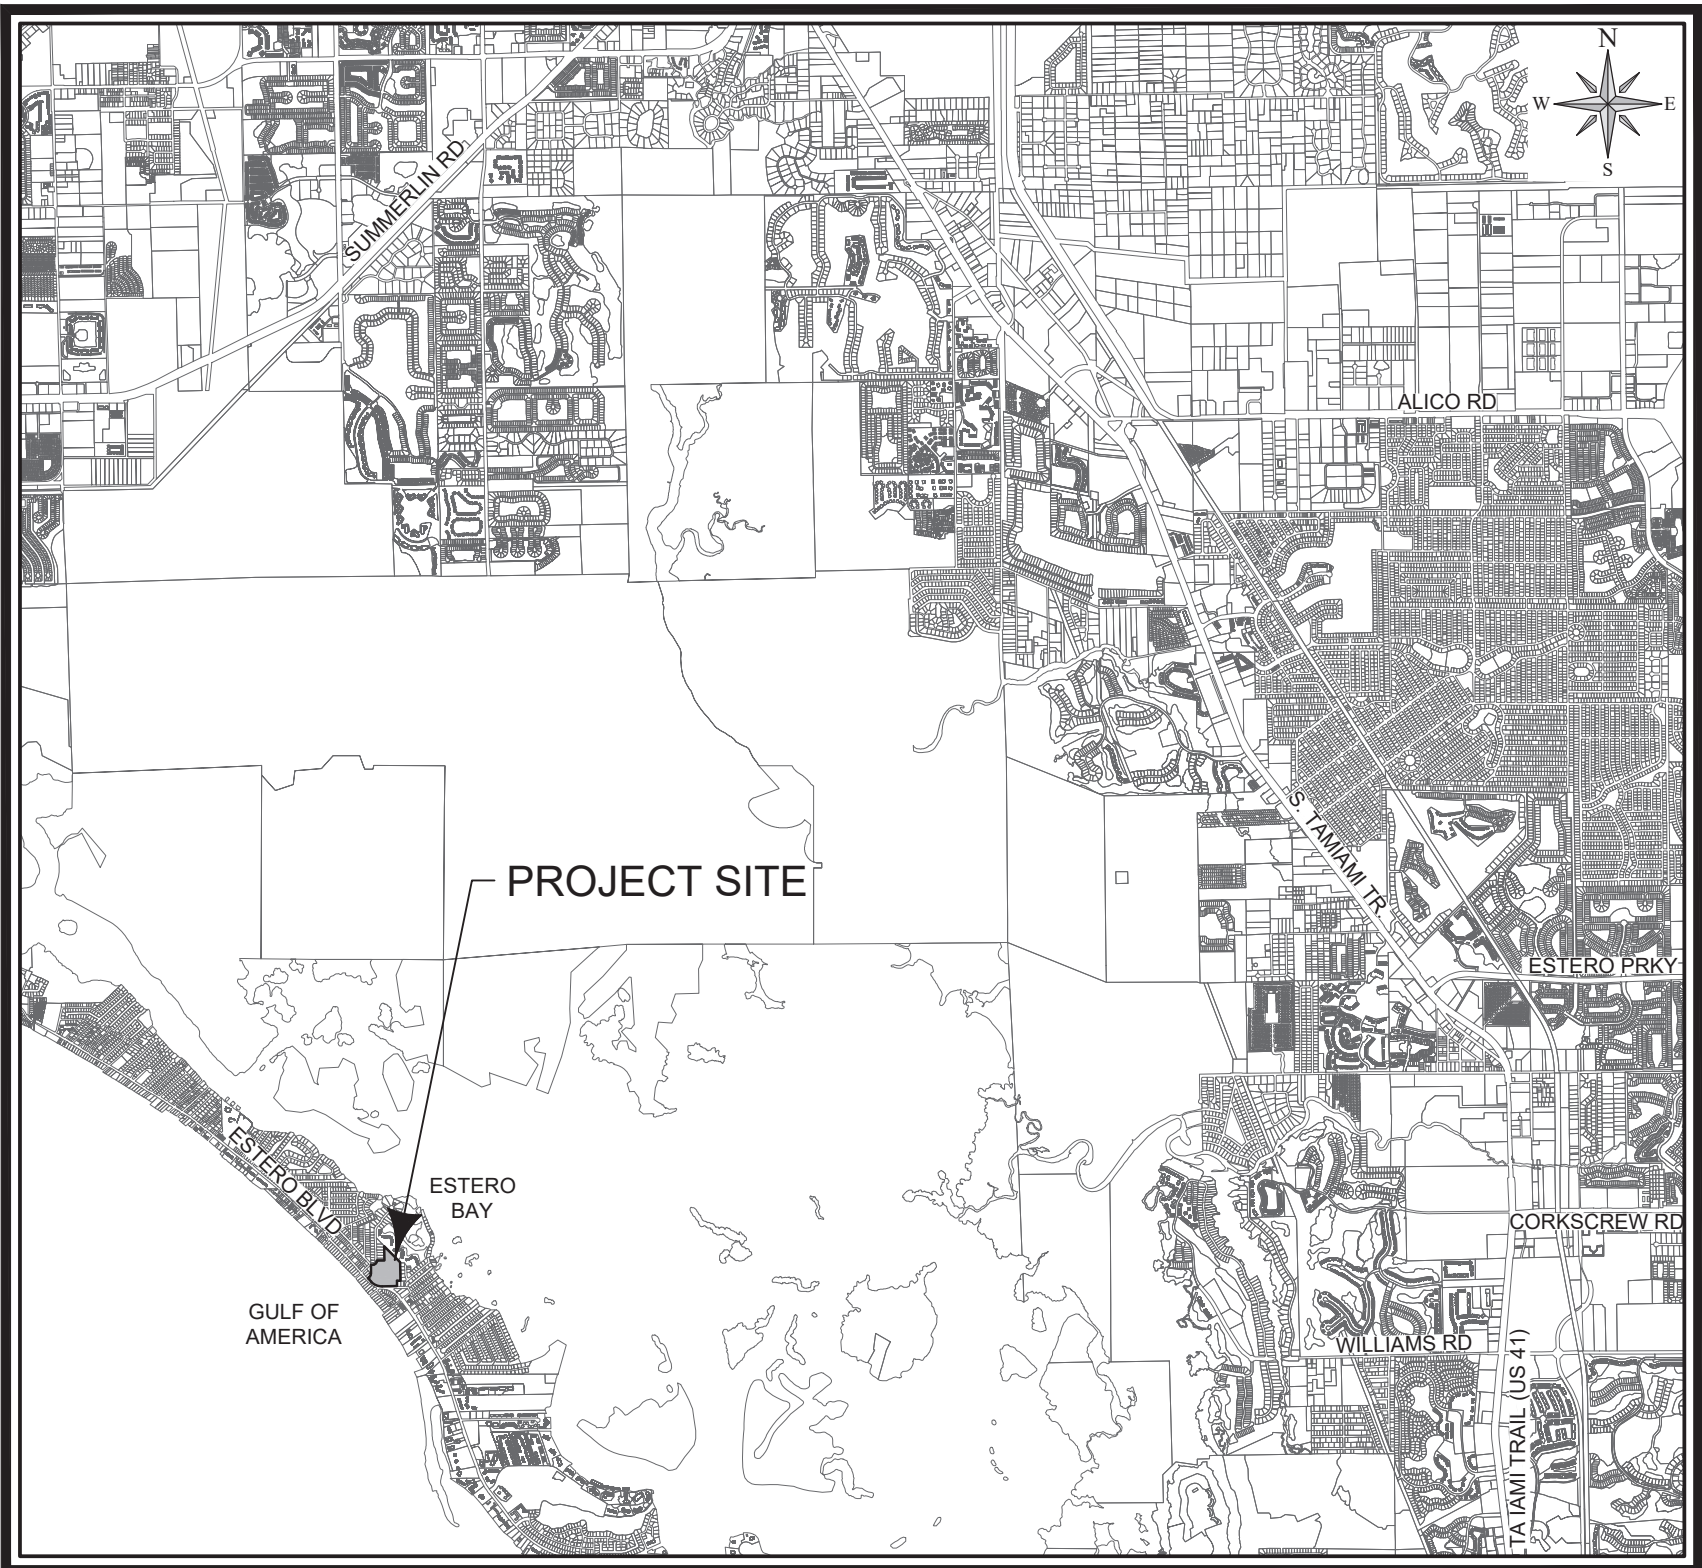

LOCATION MAP
N.T.S.

Sheet No.	Sheet Description
1	COVER AND INDEX OF SHEETS
2	GENERAL NOTES
3	EXISTING CONDITIONS AND AERIAL PLAN
4	EROSION CONTROL AND DEMOLITION PLAN
5	SITE PLAN
6	GRADING, PAVING AND DRAINAGE PLAN
7	TYPICAL CROSS SECTIONS
8	UTILITY PLAN
9	SITE CONSTRUCTION DETAILS
10	STORM SEWER DETAILS
11	WATER DETAIL
12	WASTEWATER NOTES AND DETAILS
13	LAKE MANAGEMENT PLAN
14	FIRE TRUCK MOVEMENT PLAN

LEGAL DESCRIPTION:

PROPERTY DESCRIPTION
(PER OR 1763, PG 3157)


ALL OF GOVERNMENT LOT 1 OF SECTION 33, TOWNSHIP 46 SOUTH, RANGE 24 EAST; EXCEPT: THAT CERTAIN TRACT PREVIOUSLY CONVEYED BY EDITH TREBELL TO MCPHIE LAND COMPANY AND RECORDED IN DEED BOOK 135, PAGE 77, OF THE PUBLIC RECORDS;

ALSO LOT 5, BLOCK "F"; LOTS 13, 15, 16, 17, 18, 19, 20, 23, 24 AND 25 OF BLOCK "H" OF THAT CERTAIN SUBDIVISION KNOWN AS MCPHIE PARK UNIT NUMBER 2, ACCORDING TO THE PLAT THEREOF RECORDED IN PLAT BOOK 8, PAGE 59, OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA;

EXCEPTING HOWEVER, THE FOLLOWING DESCRIBED LAND, HERETO CONVEYED TO LEONARD SANTINI BY THE GRANTOR BY WARRANTY DEED RECORDED IN DEED BOOK 298, PAGE 112, OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA: BEGINNING AT THE SOUTHEAST CORNER OF GOVERNMENT LOT 1 IN SECTION 33, TOWNSHIP 46 SOUTH, RANGE 24 EAST ON ESTERO ISLAND RUN NORTHWESTERLY, ALONG A LINE RUNNING FROM SAID SOUTHEAST CORNER TO A POINT 1,200 FEET NORTH AND 170 FEET EAST OF THE SOUTHWEST CORNER OF SAID GOVERNMENT LOT 1, FOR 722.28 FEET; THENCE RUN SOUTH PARALLEL TO THE WEST LINE OF SAID GOVERNMENT LOT 1 FOR 521.68 FEET TO THE CORNER ON THE SOUTH LINE OF SAID LOT 1 COMMON TO LOTS 10 AND 11 OF BLOCK H, UNIT NO. 2, MCPHIE PARK, ACCORDING TO A PLAT THEREOF RECORDED IN PLAT BOOK 8, AT PAGE 59 OF THE PUBLIC RECORDS OF LEE COUNTY; THENCE RUN EAST ALONG THE SOUTH LINE OF SAID LOT 1 AND THE NORTH LINE OF SAID BLOCK H FOR 500 FEET TO THE POINT OF BEGINNING, CONTAINING 3.0 ACRES MORE OR LESS

LESS ALL OF GOVERNMENT LOT 1, SECTION 33, TOWNSHIP 46 SOUTH, RANGE 24 EAST, EXCEPT BEGINNING AT THE SOUTHWEST CORNER OF SAID GOVERNMENT LOT 1, THENCE NORTH 1,674 FEET TO THE POINT OF BEGINNING OF THE LAND HEREIN DESCRIBED; THENCE NORTH 67° EAST A DISTANCE OF 257 FEET, MORE OR LESS, TO THE SHORELINE OF A SMALL BAYOU, THENCE NORTHEASTERLY IN A DIRECT LINE TO AND THROUGH THE CENTER OF A SMALL PATH WHICH LEADS FROM OSTEGO BAY TO SAID BAYOU TO THE SHORE OF OSTEGO BAY; THENCE NORTHWESTERLY ALONG THE SHORES OF SAID OSTEGO BAY TO THE WEST LINE OF SAID LOT 1; THENCE SOUTH 786 FEET, MORE OR LESS, TO THE POINT OF BEGINNING, AND EXCEPT BEGINNING AT THE SOUTHWEST CORNER OF SAID GOVERNMENT LOT 1, THENCE RUN NORTH 1,200 FEET; THENCE RUN EAST 170 FEET; THENCE RUN TO THE SOUTHEAST CORNER OF SAID GOVERNMENT LOT 1; THENCE WEST ALONG THE SOUTH LINE OF SAID GOVERNMENT LOT 1 TO THE POINT OF BEGINNING.

ALSO THE EASTERLY 10 FEET OF LOT 4, FLOCK F, MCPHIE PARK, UNIT 2, AND ALL OF LOTS 14, 21 AND 22, BLOCK H, MCPHIE PARK, UNIT 2, AS PER PLAT RECORDED IN PLAT BOOK 8, PAGE 59, OF THE PUBLIC RECORDS OF LEE COUNTY, FLORIDA

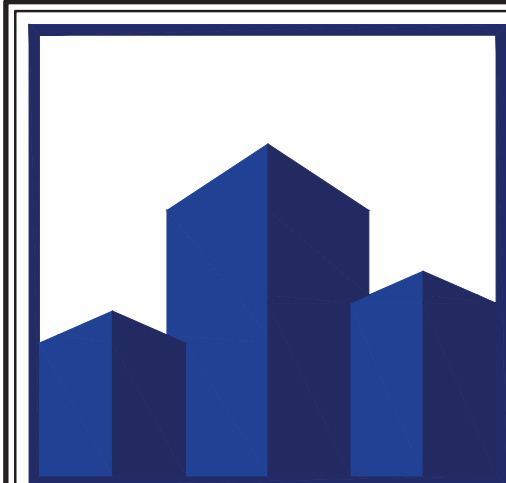

RDA CONSULTING ENGINEERS, LLC.

NAPLES OFFICE: 791 10TH STREET SOUTH, SUITE 302, NAPLES, FL 34102
PHONE: (239) 649-1551

BONITA SPRINGS OFFICE: 8000 HEALTH CENTER BLVD., SUITE 200, BONITA SPRINGS, FL 34135
FAX: (239) 649-7112

ORLANDO OFFICE: 801 INTERNATIONAL PRKY., SUITE 500, LAKE MARY, FL 32746
WWW.RDAFL.COM

1	11/19/2025	PER TOWN OF FORT MYERS BEACH MEETING 11/18/2025	C.G.K.
NO.	DATE	DESCRIPTION	BY
DATUM NOTE: ALL ELEVATIONS SHOWN REFERENCE NORTH AMERICAN VERTICAL DATUM 1988 (NAVD88) CONVERSION FACTOR TO NATIONAL GEODETIC VERTICAL DATUM 1929 (NGVD29) IS (+/-) 1.104			

COVER AND INDEX OF SHEETS



Oscar Lugo
FL. LICENSE NO. 88719
COA #31149

This item has been digitally signed and sealed by Oscar Lugo, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic documents.

PROJECT No.:	250219
DATE:	SEPTEMBER 2025
CHECKED BY:	O.L.
DESIGNED BY:	C.G.K./H.H.
DRAWN BY:	C.G.K.
SHEET:	1 of 14

GENERAL NOTES

1. THE REVIEW AND APPROVAL OF THESE IMPROVEMENT PLANS DOES NOT AUTHORIZE THE CONSTRUCTION OF REQUIRED IMPROVEMENTS WHICH ARE INCONSISTENT WITH EXISTING EASEMENTS OF RECORD.
2. CHURCH OF THE ASCENSION AND THEIR ASSIGNS, OR SUCCESSORS SHALL OWN AND MAINTAIN THE WATER MANAGEMENT SYSTEM, OPEN SPACE, COMMON AREAS, AND PRIVATE STREETS.
3. ELEVATIONS ARE BASED ON NORTH AMERICAN VERTICAL DATUM 1988 (NAVD '88). CONVERSION FROM NAVD '88 TO NGVD '29 = (+) 1.184 FEET.
4. EXISTING REFERS TO FACILITIES EITHER PREVIOUSLY CONSTRUCTED OR TO BE CONSTRUCTED UNDER SEPARATE DEVELOPMENT ORDERS.
5. EXISTING UTILITY INFORMATION WAS PLOTTED FROM AVAILABLE RECORDS. CONTRACTOR SHALL FIELD VERIFY ELEVATIONS AND LOCATION OF ALL UNDERGROUND AND OVERHEAD UTILITY LINES PRIOR TO COMMENCEMENT OF CONSTRUCTION. ANY VARIATIONS FROM THE INFORMATION SHOWN ON THE PLANS SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ENGINEER. THE CONTRACTOR SHALL COORDINATE WITH ALL LOCAL UTILITIES PRIOR TO EXCAVATION TO DETERMINE THE EXACT LOCATION OF ALL UTILITIES. ANY DEVIATION TO EXISTING INFORMATION THE CONTRACTOR SHALL BE REPAIRED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER. ANY DESIGN MODIFICATION AND EXPENSE AS A RESULT OF EXISTING UTILITY LINES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.
6. THE SURVEY SHOWS EXISTING EASEMENTS ON THIS SITE.
7. THE LOCATION OF EXISTING UTILITIES, PAVEMENT, VEGETATION, AND MISCELLANEOUS IMPROVEMENTS ARE APPROXIMATE ONLY. THE EXACT LOCATIONS SHALL BE VERIFIED BY THE CONTRACTOR IN THE FIELD.
8. PROPERTY FALLS IN FLOOD ZONE "AE" BASE FLOOD ELEVATION 11.0 - 12.0, ACCORDING TO THE FEDERAL EMERGENCY MANAGEMENT AGENCY (FEMA) FLOOD INSURANCE RATE MAP (FIRM) NUMBER 12071C05676, FMB COMMUNITY NUMBER 120873, PANEL 568 DATED NOVEMBER 17, 2022 AND NUMBER 12071C05676, FMB COMMUNITY NUMBER 125124, PANEL 567 DATED NOVEMBER 17, 2022.
9. THIS SITE *does/does not* EXHIBIT FRESHWATER OR SALTWATER INUNDATION.
10. COASTAL SETBACK LINES DO NOT APPLY TO THIS PARCEL.
11. THIS PROJECT WILL NOT CAUSE ADVERSE IMPACTS TO GROUND AND/OR SURFACE WATERS. THIS SITE CAN BE USED SAFELY FOR BUILDING PURPOSES WITHOUT UNDOING DANGER FROM FLOOD OR ADVERSE SOIL OR FOUNDATION CONDITIONS CONTINGENT UPON SOIL BORINGS AND DESIGN FOR EACH STRUCTURE BY THE BUILDING ARCHITECT TO ACCOMMODATE SUBSOIL CONDITIONS. THIS STATEMENT DOES NOT INCLUDE SINKHOLES.
12. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND ELEVATIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION. ANY DEVIATION IN PLAN INFORMATION SHALL BE REPORTED TO THE ENGINEER AND OWNER'S REPRESENTATIVE IMMEDIATELY.
13. THE CONTRACTOR SHALL RETAIN ON THE WORK SITE AT ALL TIMES COPIES OF ALL PERMITS NECESSARY FOR CONSTRUCTION. A PRE-CONSTRUCTION MEETING SHALL TAKE PLACE WITH COLLIER COUNTY ENGINEERING SERVICES PRIOR TO THE START OF CONSTRUCTION.
14. LEE COUNTY UTILITIES, FLORIDA POWER AND LIGHT, CENTURYLINK TELEPHONE SERVICE, TEGO GAS AND COMCAST MAY HAVE EXISTING UTILITIES ADJACENT TO THIS PROPOSED CONSTRUCTION. CONTRACTOR SHALL CONTACT THE RESPECTIVE UTILITIES TO LOCATE THEIR FACILITIES PRIOR TO COMMENCEMENT OF CONSTRUCTION.
15. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WITH FPL AND/OR LIGHTING CONTRACTOR ON THE INSTALLATION OF POWER SUPPLY AND ELECTRIC METERS FOR STREET OR PARKING LOT LIGHTS.
16. THE CONTRACTOR SHALL RETAIN ON THE WORK SITE AT ALL TIMES COPIES OF ALL PERMITS NECESSARY FOR CONSTRUCTION.
17. A PRE-CONSTRUCTION MEETING SHALL TAKE PLACE WITH COLLIER COUNTY ENGINEERING SERVICES PRIOR TO THE START OF CONSTRUCTION.
18. LEE COUNTY UTILITIES, FLORIDA POWER AND LIGHT, CENTURYLINK TELEPHONE SERVICE, TEGO GAS AND COMCAST MAY HAVE EXISTING UTILITIES ADJACENT TO THIS PROPOSED CONSTRUCTION. CONTRACTOR SHALL CONTACT THE RESPECTIVE UTILITIES TO LOCATE THEIR FACILITIES PRIOR TO COMMENCEMENT OF CONSTRUCTION.
19. CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING WITH FPL AND/OR LIGHTING CONTRACTOR ON THE INSTALLATION OF POWER SUPPLY AND ELECTRIC METERS FOR STREET OR PARKING LOT LIGHTS.
20. ALL CONSTRUCTION TO BE IN ACCORDANCE WITH F.D.O.T STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, LATEST EDITION, AND THE F.D.O.T. ROADWAY AND TRAFFIC DESIGN STANDARDS, LATEST EDITION.
21. THE CONTRACTOR SHALL NOTIFY THE OWNER AND CONTACT ALL UTILITY COMPANIES FOR LOCATIONS OF EXISTING UTILITIES IN THE AREA 72 HOURS (MINIMUM) PRIOR TO COMMENCING CONSTRUCTION.
22. THE CONTRACTOR SHALL NOTIFY THE COLLIER COUNTY DIVISION OF DEVELOPMENT SERVICES A MINIMUM OF 72 HOURS PRIOR TO ALL INSPECTIONS REQUIRED BY THE COLLIER COUNTY LAND DEVELOPMENT CODE.
23. PRIOR TO THE START OF ANY CONSTRUCTION, PROVIDE A CONNECTION PERMIT FROM COUNTY WHICH EVER MAY BE APPLICABLE.
24. PRIOR TO THE ISSUANCE OF ANY CERTIFICATE OF COMPLIANCE, PROVIDE TO DEVELOPMENT SERVICES A NOTICE OF APPROVAL FROM TOWN FOR WORK WITHIN THE R.O.W.
25. OWNER SHALL INSURE THAT THE GENERAL CONTRACTOR COMPLIES WITH ALL REQUIREMENTS OF STORM WATER POLLUTION PREVENTION (SWP3) ON THIS PLAN. IF THE PROJECT AREA IS MORE THAN 1 ACRE, THE OWNER SHALL FILE A NOTICE OF INTENT (NOI) WITH BOTH THE DEP AND LEE COUNTY DEVELOPMENT SERVICES AT LEAST 48 HRS. PRIOR TO THE START OF CONSTRUCTION.
26. A VEGETATION PERMIT IS REQUIRED PRIOR TO ANY SITE WORK. PROTECTIVE BARRICADES MUST BE CONSTRUCTED AND INSPECTED PRIOR TO PERMIT ISSUANCE.
27. ANY DEVIATIONS FROM THESE PLANS BY THE OWNER OR CONTRACTOR REQUIRES PRIOR WRITTEN APPROVAL BY THE ENGINEER. CONTRACTOR AND/OR ANY OF HIS SUBCONTRACTORS SHALL NOTIFY THE ENGINEER IMMEDIATELY OF ANY DISCREPANCY OR ERRORS IN THE PLANS IF EXISTING CONDITIONS ARE NOT AS SHOWN ON THE PLANS.
28. CONTRACTOR IS REQUIRED TO OBTAIN FROM THE ENGINEER AND OWNER WRITTEN APPROVAL FOR ANY DEVIATION TO THE PLANS AND/OR SPECIFICATIONS.
29. ALL DISTURBED AREAS SHALL RECEIVE SEED AND MULCH, EXCEPT WHERE SPECIFICALLY IDENTIFIED AS A PAY ITEM FOR A PARTICULAR AREA, SEED AND MULCH IS INCIDENTAL TO THE PROJECT
30. CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING TRAFFIC AND USAGE OF THE EXISTING STREETS ADJACENT TO THE PROJECT. ALL TRAFFIC CONTROL AND USAGE SHALL BE IN ACCORDANCE WITH FLORIDA MANUAL OF TRAFFIC CONTROL AND SAFE PRACTICES FOR STREET CONSTRUCTION, MAINTENANCE, AND UTILITY OPERATIONS. TRAFFIC CONTROL OPERATION PROCEDURES SHALL BE SUBMITTED TO OWNER FOR APPROVAL PRIOR TO BEGINNING CONSTRUCTION.
31. INSTALLATION OF SUBSURFACE CONSTRUCTION, INCLUDING BUT NOT LIMITED TO WATER AND IRRIGATION LINES, SEWER LINES, PUBLIC UTILITIES AND STORM DRAINAGE IS REQUIRED PRIOR TO COMPACTION OF SUBGRADE AND ROADWAY CONSTRUCTION.
32. THE PROPERTY OWNER IS RESPONSIBLE FOR REPLACEMENT OF ALL DEAD LANDSCAPE MATERIAL AND MAINTENANCE OF THE REQUIRED IRRIGATION SYSTEM.
33. ALL EXOTIC VEGETATION AS DEFINED BY COLLIER COUNTY LAND DEVELOPMENT CODE SHALL BE REMOVED FROM THE SITE AND PROPERTY OWNER SHALL BE RESPONSIBLE FOR SUBSEQUENT ANNUAL EXOTIC REMOVAL IN PERPETUITY.
34. IRRIGATION WATER WILL BE SUPPLIED BY WELL.
35. PROPOSED BUILDING FOOTPRINTS, PATIOS AND ACCESSORY STRUCTURES MAY BE MODIFIED WITHIN THE ALLOWABLE SETBACKS.
36. YARD DRAINS SHALL BE ADDED IN GREEN AREAS AS NECESSARY AT THE DIRECTION OF THE LANDSCAPE ARCHITECT OR ENGINEER.
37. FOR THE FIRE SPRINKLER LINE SEE THE ENGINEER OR FIRE PROTECTION DOCUMENTS FROM THE POINT OF SERVICE (POS). THIS IS NOT THE CIVIL ENGINEER'S RESPONSIBILITY. HYDRANTS SHALL BE 300 FT. APART MAX. HYDRANTS REQUIRED WITHIN 400 FEET OF ANY PORTION OF THE BUILDING.
38. ALL RAMPS, SLOPES, WALKWAYS, SIDEWALKS INTENDED FOR DISABLED PERSONS MUST MEET THE ADA STANDARDS FOR ACCESSIBLE DESIGN, LATEST EDITION.
39. TRUNCATED DOMES SHALL BE INSTALLED AT ALL PEDESTRIAN CROSSINGS AND HANDICAP PARKING.
40. LIGHT POLES SHALL MAINTAIN A 5 FOOT MINIMUM SEPARATION FROM EXISTING AND PROPOSED LEE COUNTY UTILITIES.
41. ARTIFICIAL LIGHTING USED TO ILLUMINATE PREMISES SHALL BE DIRECTED AWAY FROM ADJACENT PROPERTIES AND STREETS, SHINING ONLY ON THE SUBJECT SITE. ALL LIGHT FIXTURES TO BE FURNISHED WITH A FLAT LENSES AND HOUSE SHIELDS FULL CUTOFF TYPE TO LIMIT LIGHT POLLUTION FOR THE ADJOINING PROPERTIES, REFER TO LDC SECTION 34-625 (OUTDOOR LIGHTING STANDARDS). LIGHTING DESIGN BY OTHERS.
42. LANDSCAPING AND IRRIGATION SHALL BE INSTALLED PRIOR TO PRELIMINARY ACCEPTANCE.
43. EXISTING IMPROVEMENTS SHALL BE RESTORED TO A CONDITION EQUIVALENT TO THAT WHICH EXISTED PRIOR TO COMMENCING CONSTRUCTION, AT NO ADDITIONAL COST TO OWNER.
44. THE CONTRACTOR SHALL ACCURATELY PLOT THE LOCATIONS AND ELEVATIONS OF ALL IMPROVEMENTS INSTALLED ON A FINAL SET OF RECORD DRAWINGS WHICH SHALL BE DELIVERED TO THE ENGINEER AS SOON AS POSSIBLE.
45. ALL SIGN RELATED WORK TO BE COORDINATED WITH THE COUNTY AND TOWN, TO MAINTAIN INTEGRITY OF SIGN ASSET DATABASE. CONTRACTOR TO FOLLOW TRAFFIC OPERATIONS SIGNING AND PAVEMENT MARKINGS SPECIAL PROVISION DETAILS WHICH INDICATE USING 2.5"x2.5" GALVANIZED METAL SQUARE TUBULAR SIGNPOSTS.
46. LEE COUNTY AND THE TOWN HAS UNDERGROUND FACILITIES WITHIN THE SCOPE OF WORK. THE CONTRACTOR WILL NEED TO COORDINATE WITH THE TRANSPORTATION OPERATIONS LOCATE DEPARTMENT DURING CONSTRUCTION. ADDITIONALLY, ALL PULL BOXES ELEVATIONS ADJUSTMENTS NEED TO BE MADE WILL HAVE TO BE REVIEWED AND APPROVED BY COUNTY AND TOWN LOCATE DEPARTMENT BEFORE BEING MADE.
47. ALL COSTS AND EXPENSES OF ANY AND ALL REPAIRS, REPLACEMENTS, MAINTENANCE AND RESTORATIONS OF ABOVE GROUND IMPROVEMENTS PERMITTED WITHIN A C.U.E. SHALL BE THE SOLE FINANCIAL RESPONSIBILITY OF THE GRANTOR, ITS SUCCESSOR OR ASSIGNS.

GENERAL UTILITY NOTES

3. FORT MYERS BEACH AND LEE COUNTY UTILITIES STANDARDS AND SPECIFICATIONS ARE TO BE USED AT A MINIMUM.
2. POTABLE WATER SYSTEMS -- LEE COUNTY UTILITIES SHALL ONLY BE RESPONSIBLE FOR MAINTAINING THOSE POTABLE WATER MAINS AND LATERALS THAT ARE DESIGNATED PUBLIC UTILITY EASEMENTS AND UP TO CUSTOMER SIDE OF WATER METER. ALL MAINS AND/OR APPLICABLE WATER NOT LOCATED -- WITHIN PUBLIC EASEMENTS SHALL BE MAINTAINED BY THE OWNER AND/OR AN ASSOCIATION.
3. UNLESS OTHERWISE SPECIFIED, CROSS CONNECTION CONTROL SHALL FOLLOW FORT MYERS REQUIREMENTS.
4. ALL WATER LINES SHALL BE INSTALLED WITH A MINIMUM OF 36" COVER MEASURED FROM FINISHED GRADE UNLESS OTHERWISE SHOWN ON PLANS. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ENSURE MINIMUM COVER, REGARDLESS OF EXISTING GRADE. PERIODIC CHECKS FOR MINIMUM COVER WILL BE MADE BY FORT MYERS BEACH UTILITIES, LEE COUNTY UTILITIES AND ENGINEER.
5. LEE COUNTY UTILITIES, LEE COUNTY ELECTRIC, CENTURY LINK, COMCAST, ETC. MAY HAVE EXISTING UTILITIES ADJACENT TO AND/OR WITHIN THE PROPOSED CONSTRUCTION AREA. CONTRACTOR SHALL CONTACT THE RESPECTIVE UTILITIES TO LOCATE THEIR FACILITIES PRIOR TO COMMENCEMENT OF CONSTRUCTION.
6. THE LOCATION OF EXISTING UTILITIES AND STORM SEWER SHOWN ON THIS PLAN HAS BEEN PREPARED FROM RECORD DRAWINGS AND FIELD INFORMATION. IT IS THE CONTRACTORS RESPONSIBILITY TO DETERMINE THEIR EXACT LOCATION PRIOR TO CONSTRUCTION.
7. ALL UNDERGROUND UTILITIES AND INFRASTRUCTURE LOCATED BENEATH THE STABILIZED PORTION OF THE ROAD BED SHALL BE INSTALLED PRIOR TO COMPACTION OF THE SUBGRADE OR AS OTHERWISE DIRECTED BY THE OWNER.
8. DO NOT CUT THE WATER MAINS IN UNTIL LINES HAVE BEEN CLEARED BY COLLIER COUNTY UTILITIES AND FLORIDA DEPARTMENT OF HEALTH.
9. THE IRRIGATION SYSTEM SHALL BE OWNED AND MAINTAINED BY THE DEVELOPER OR HIS ASSIGN.
10. ALL CONDUITS FOR OTHER UTILITIES SHALL BE PLACED A MINIMUM OF 18" VERTICAL AND 5' HORIZONTAL FROM POTABLE WATER, FORCE MAINS & SANITARY SEWER.
11. THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO SAFEGUARD ALL EXISTING STRUCTURES, UTILITIES AND SURVEY MARKERS IN THE AREA.
12. UNDERGROUND CONTRACTOR SHALL SCHEDULE AND COORDINATE WITH LEE COUNTY UTILITIES ENGINEERING DEPARTMENT ON THE FOLLOWING APPLICABLE CONSTRUCTION ITEMS:
 - A. POTABLE WATER DISTRIBUTION
 1. CONNECTIONS
 2. PRESSURE TESTS
 3. FLUSHING AND BACTERIOLOGICAL TESTING.
 4. MASTER METER AND BACKFLOW PREVENTOR INSTALLATIONS.
13. CONTRACTOR SHALL NOTIFY ALL UTILITY COMPANIES AT LEAST 48 HOURS PRIOR TO COMMENCEMENT OF ANY UNDERGROUND WORK. OTHER UTILITIES MAY EXIST ON SITE; HOWEVER, IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO MAKE THIS DETERMINATION.
14. CONTRACTOR SERVICE INSTALL REQUIREMENTS:

CONTRACTOR SHALL INSTALL ALL WATER, SEWER, FIRE, AND STORM SERVICES TO WITHIN 5' OF BUILDING AND COORDINATE ALL SERVICE LOCATIONS AND CONNECTIONS WITH THE BUILDING PLUMBER AND 12" ABOVE FINAL GRADE. CONTRACTOR IS RESPONSIBLE FOR REMOVING, TERMINATING, PLUGGING, OR CAPPING ALL ABANDONED SERVICES.
15. FINAL METER SIZE SHALL BE DETERMINED BY PUBLIC UTILITIES. THE SERVICE LEAD, METER BOX AND METER SHALL BE INSTALLED BY DEVELOPER OR HIS ASSIGN.
16. ALL COSTS AND EXPENSES OF ANY AND ALL REPAIRS, REPLACEMENTS, MAINTENANCE AND RESTORATIONS OF ABOVEGROUND IMPROVEMENTS PERMITTED WITHIN A CUE SHALL BE THE SOLE FINANCIAL RESPONSIBILITY OF THE GRANTOR, ITS SUCCESSORS OR SONS.
17. WATER WILL BE PROVIDED BY FORT MYERS BEACH UTILITIES.
18. SEWER WILL BE PROVIDED BY LEE COUNTY UTILITIES.

POWER POLE RELOCATION NOTES

1. LIGHT POLES SCHEDULED FOR REMOVAL/RELOCATION WHILE ACCOMMODATING THE TURN LANE AND DRIVEWAY ACCESS CONSTRUCTION, SHALL BE STORED SUCH THAT ITS CURRENT CONDITION IS MAINTAINED. THE POLE, LIGHT FIXTURE, ALL ACCESSORIES, BOLTS, ETC. MUST BE IN THE SAME CONDITION WHEN INSTALLED AS WHEN THEY WERE WHEN REMOVED.
2. POLE MUST BE INSPECTED AND DOCUMENTED PRIOR TO REMOVAL AND PRIOR TO THE RE-INSTALLATION.
3. CONTINUOUS POWER CIRCUIT MUST BE PROVIDED SUCH THAT ALL ROADWAY LIGHTING REMAINS FUNCTIONAL DURING THE LIGHT POLE REMOVAL ON IMMOKALEE ROAD.
4. FOR ROADWAY LIGHTING INSPECTION, CONTACT TOWNSHIP OF FORT MYERS BEACH TRAFFIC OPERATIONS.
5. CONCEALED WORK: ALL WORK WHICH WILL NOT BE READILY VISIBLE UPON COMPLETION SHALL NOT BE CONCEALED UNTIL A COUNTY ROADWAY LIGHTING/SIGNAL INSPECTOR GIVES APPROVAL. IN THE EVENT THE FOLLOWING ITEMS ARE CONCEALED, IT WILL BE THE CONTRACTOR'S RESPONSIBILITY TO EXPOSE THE QUESTIONED ITEM(S) FOR THE INSPECTORS' APPROVAL, AT NO ADDITIONAL COST TO THE TOWNSHIP OF IMMOKALEE BUT IS NOT LIMITED TO: BURIED OR IMBEDDED CONDUIT, GROUNDING CONDUCTORS, GROUND RODS, AND GROUNDING ARAYS.

UTILITIES SERVING THIS SITE

<u>LEE COUNTY ELECTRIC COOPERATIVE (LCEC)</u> P.O. BOX 3455 N. FT. MYERS, FL 33918 239-656-2300 800-595-2356	<u>LEE COUNTY UTILITIES</u> 1000 MONROE ST. FORT MYERS, FL 33901 PH:239 533 8181
<u>FORT MYERS BEACH FIRE CONTROL DIST</u> 100 VOOHRS ST FORT MYERS BEACH FL 33931 PH 239 592 4210	<u>TOWN OF FMB</u> 2731 OAK ST FORT MYERS BEACH, FL 33931 PH:239 765 0202
<u>LEE COUNTY SOLID WASTE</u> 10550 BUCKINGHAM RD. FORT MYERS, FL 33905 PH:2395338000	

FIRE FLOW:

**FORT MYERS BEACH FIRE DISTRICT**

17891 SAN CARLOS BLVD, FORT MYERS BEACH, FLORIDA 33931
OFFICE: 239-590-4210 ~ EMAIL: PREVENTION@FMBFIRE.ORG

HYDRANT FLOW TEST DATA SHEET

CONTACT NAME and PHONE NUMBER	Oscar Lugo - RDA Consulting Engineers
PROJECT NAME and ADDRESS	Church of the Ascension - 6025 Estero Blvd
REASON FOR FLOW TEST	DO Application

FLOW HYDRANT #	33-149
S&R HYDRANT #	33-023
DURATION OF FLOW	5 Minutes
MAIN SIZE	
DATE AND TIME OF TEST	09.22.2025 @ 0800
COEFFICIENT	0.90
BUTT DIAMETER	2.50
BUTTS FLOWED	2

STATIC #	60
S&R : RESIDUAL 1	46
S&R : RESIDUAL 2	37
FLOW : PITOT 1 CAP	40
FLOW : PITOT 2 CAPS	20
FLOW : PITOT 2 for calcs only	20
FLOW : PITOT 3 third hydrant if needed	0
FLOW : PITOT 3 third hydrant if needed	0
FLOW : PITOT 3 for calcs only	0

FLOW AT PITOT READING	1500
FLOW AT 20 PSI	2022

REQUEST RECEIVED BY	Prevention
DATE RECEIVED	09.12.2025
TEST PERFORMED BY	
PAYMENT RECEIVED	

****HYDRANT FLOW TESTS ARE ONLY VALID FOR 6 MONTHS FROM THE DATE OF TEST****

FORT MYERS BEACH FIRE DEPARTMENT

Form- XXX

1 of 1

Revision Date: DRAFT

PROPERTY DEVELOPMENT REGULATIONS

EXISTING ZONING DESIGNATION	INSTITUTIONAL (IN)	
PROJECT ACREAGE:	14.61± ACRES	
MAXIMUM BUILDING HEIGHT (ACTUAL)	65 FT	TBD
MAXIMUM BUILDING HEIGHT (ZONED)	65 FT	TBD
MINIMUM LOT SIZE	7,500 S.F. 0.17 AC	636,411 SF 14.61 AC
MINIMUM LOT WIDTH	75 FT	848 FT
MINIMUM BUILDING SETBACKS		
FRONT (S) ESTERO BLVD	20 FT	169.72 FT.
SIDE (E)	7 FT	328.69 FT.
REAR (N) INDIAN BAYOU DR	20 FT	347.47 FT.
REAR (N) WATER BODY	25 FT	116.65 FT.
SIDE (W)	21 FT	291.59 FT.

PERIMETER LANDSCAPE BUFFERING

ESTERO BLVD (S)	20' TYPE 'D'
INDIAN BAYOU DRIVE (N)	20' TYPE 'D'
EAST	10' TYPE 'B'
WEST	10' TYPE 'B'

SITE DATA

	EXISTING		PROPOSED	
	ACRES	%	ACRES	%
TOTAL SITE AREA	14.61	100	14.61	100
TOTAL SWMS AREA	13.05	100	13.05	100
IMPERVIOUS	5.95	40.73	6.47	44.28
BUILDING	0.94	6.43	0.69	4.72
PAVEMENT/CONCRETE	2.78	19.03	3.47	23.75
LAKES AT CONTROL EL.	0.96	6.57	1.59	10.88
PERVIOUS	7.10	48.6	6.58	45.04
OPEN SPACE	7.10	48.6	6.58	45.04
DRY RETENTION BOTTOM	1.27	8.69	0.72	4.93
AREAS OUTSIDE DRAINAGE BASIN				
NORTH LAKE	1.56	100	1.56	100
TOTAL PROJECT AREA	14.61	100	14.61	100

PARKING SUMMARY

BUILDING USE	# OF SEATS	MIN REQUIRED SPACES	SPACES REQUIRED	SPACES PROVIDED
CHURCH	738 SEATS IN THE CHAPEL AREA	1 SPACE FOR EACH 3 SEATS IN THE CHAPEL AREA	246 (7 ADA SPACES)	247 (22 ADA SPACES)


NOTE:

PARKING SPACE REQUIREMENT PER SECTION SEC. 34-2052 OF THE TOWN OF FORT MYERS BEACH LDC
HANDICAP SPACES HAVE BEEN PROVIDED BASED ON THE FLORIDA BUILDING CODE.

SURFACE WATER MANAGEMENT SUMMARY


CONTROL ELEVATION (FT. NAVD)	1.60
PEAK 10-YEAR, 1-DAY STORM STAGE (FT. NAVD)	2.92
PEAK 25-YEAR, 3 DAY STORM STAGE (FT. NAVD)	3.73
PEAK 100-YEAR, 3-DAY ZERO DISCHARGE STORM STAGE (FT. NAVD)	5.76
MINIMUM RECOMMENDED ROAD PARKING ELEVATION (FT. NAVD)	4.80
MINIMUM RECOMMENDED ROAD CROWN ELEVATION (FT. NAVD)	4.80
MINIMUM RECOMMENDED FINISHED FLOOR ELEVATION (FT. NAVD)	16.0
MINIMUM PERIMETER BERM ELEVATION (FT. NAVD)	4.20
FEMA FLOOD ZONE FEMA ELEVATION NAVD88 (FT. NAVD)	'AE' EL=11-12
ALLOWABLE DISCHARGE per PERMIT #36-103211-P	23 CFS
ACTUAL PEAK DISCHARGE	15.35 CFS





ENGINEERS STAMP

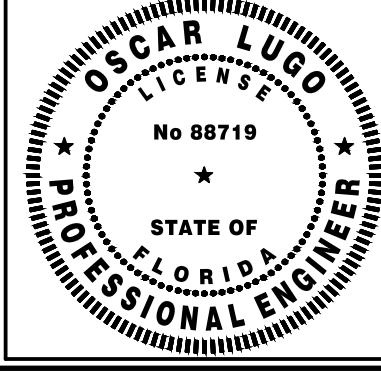

OSCAR LUGO, P.E.
FL. LICENSE NO. 88719
COA #31149

This item has been digitally signed and sealed by Oscar Lugo, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed or sealed and the signature must be verified on any electronic documents.

		PROJECT No.	
		250215	
SCALE:	N.T.S.	DATE:	SEPTEMBER 2021
CHECKED BY:	O.L.	SHEET:	2 of 14
DESIGNED BY:	C.G.K./H.H.		
DRAWN BY:	C.G.K.		

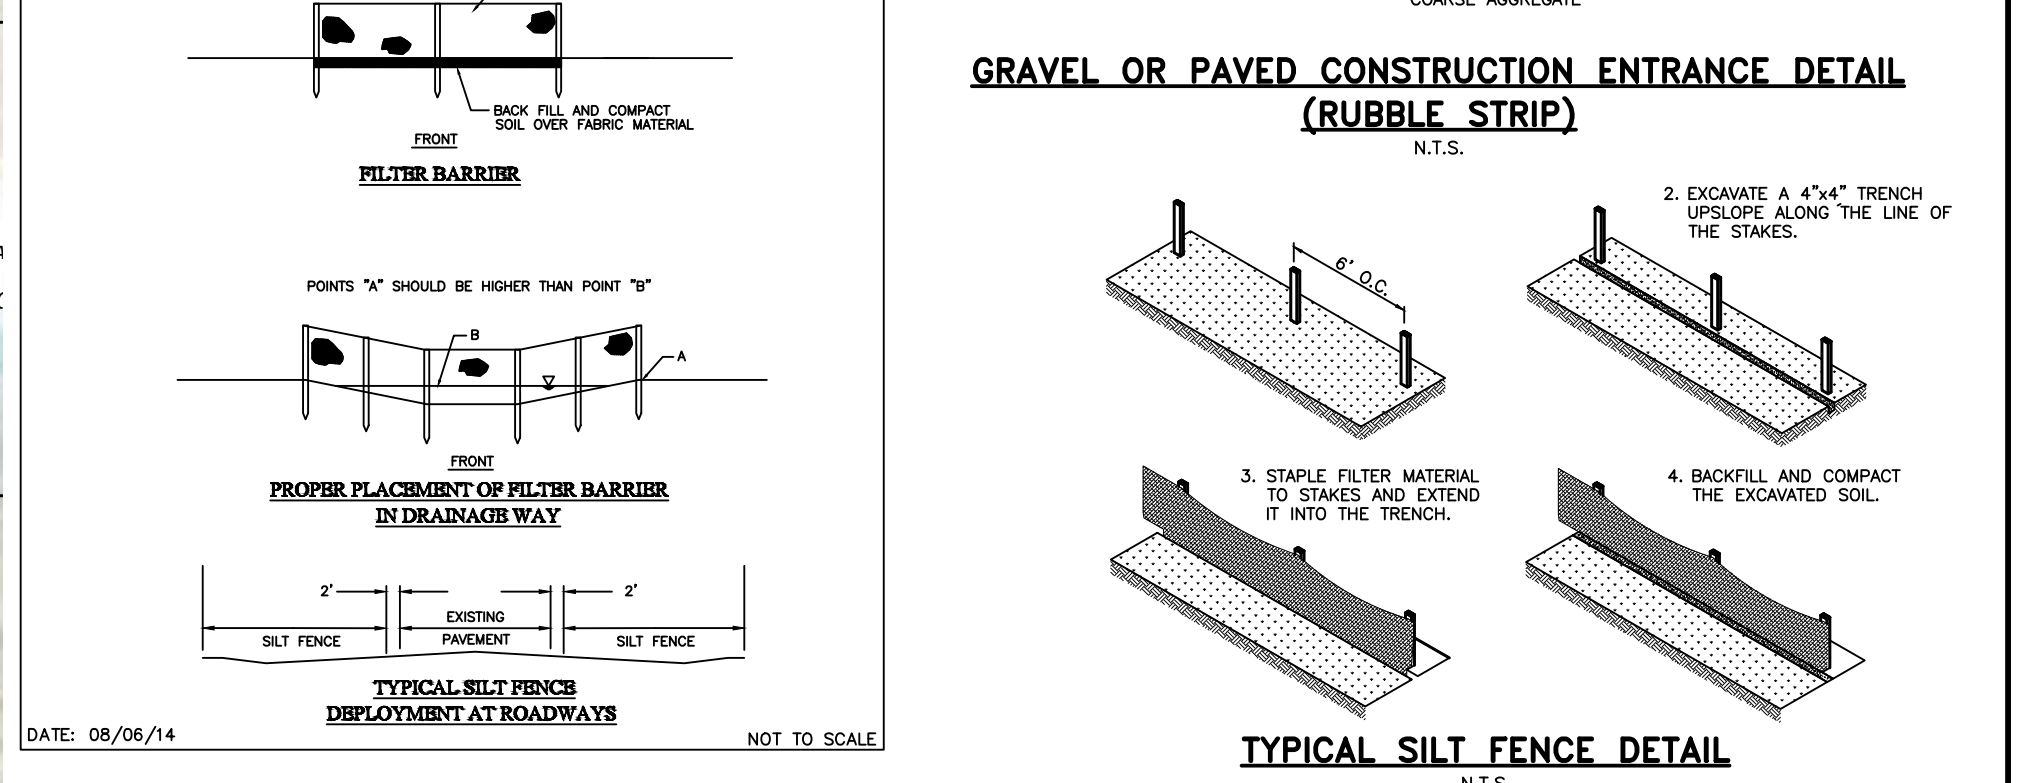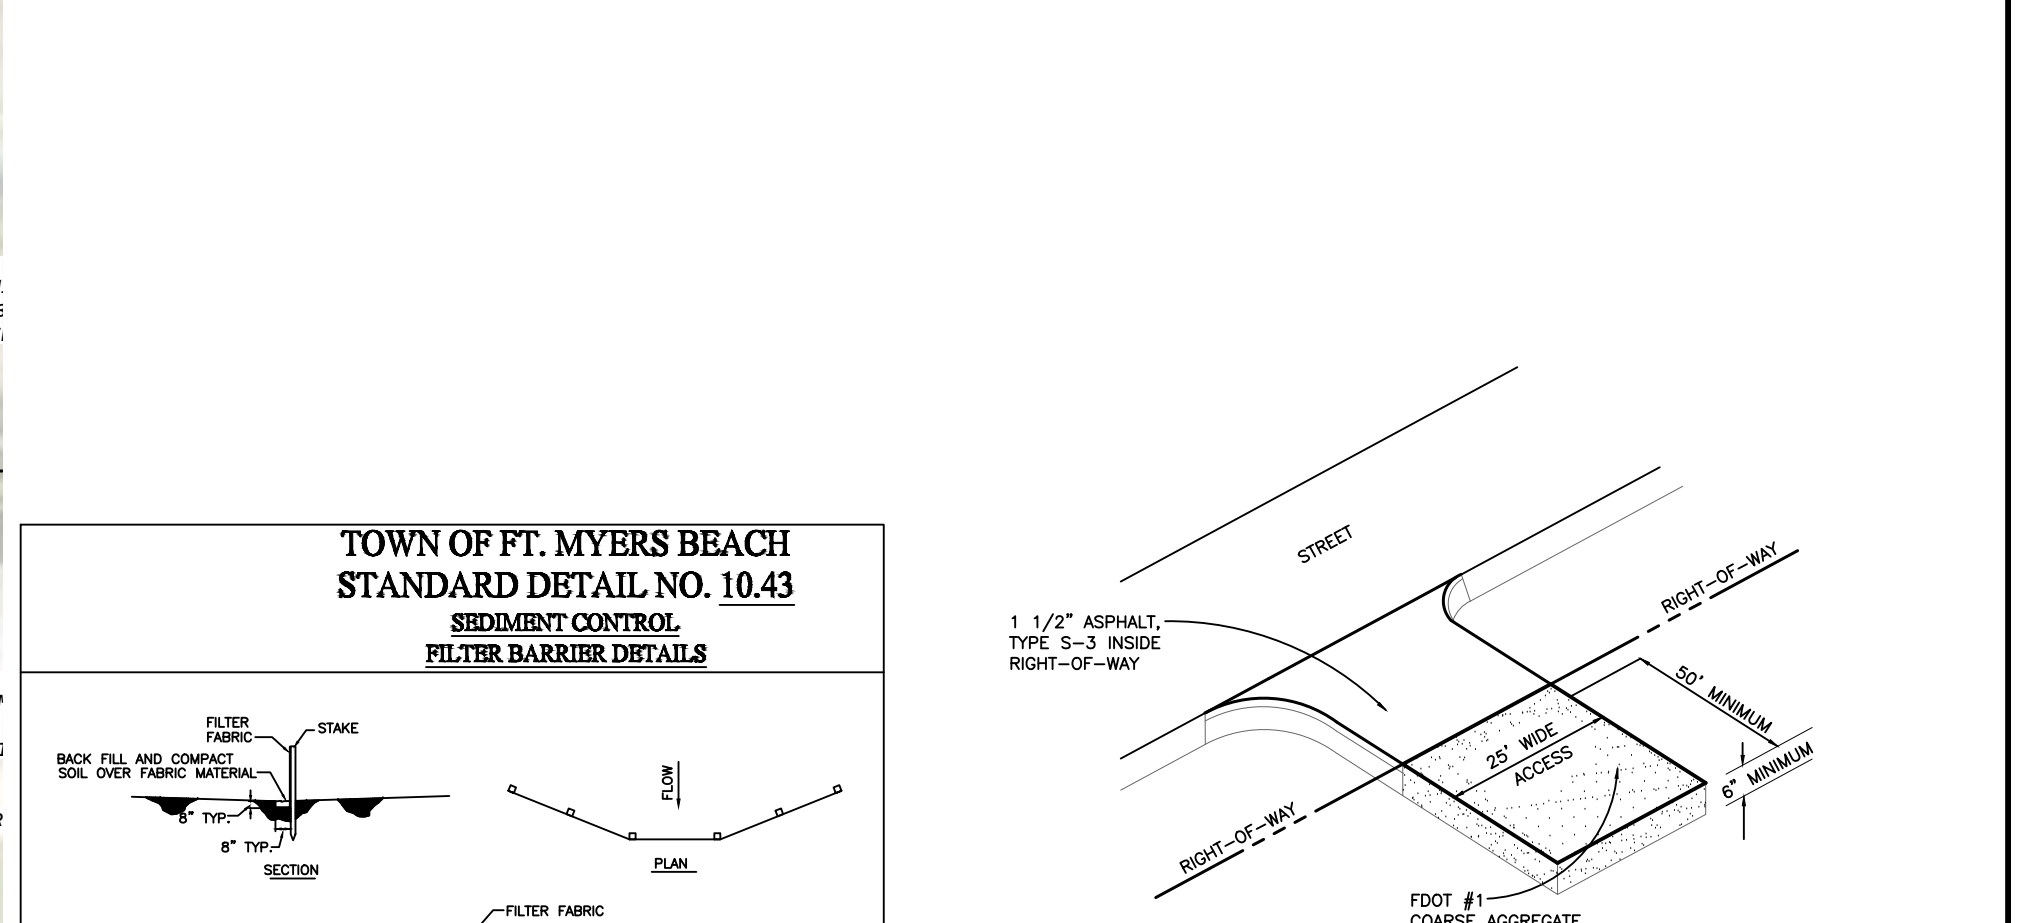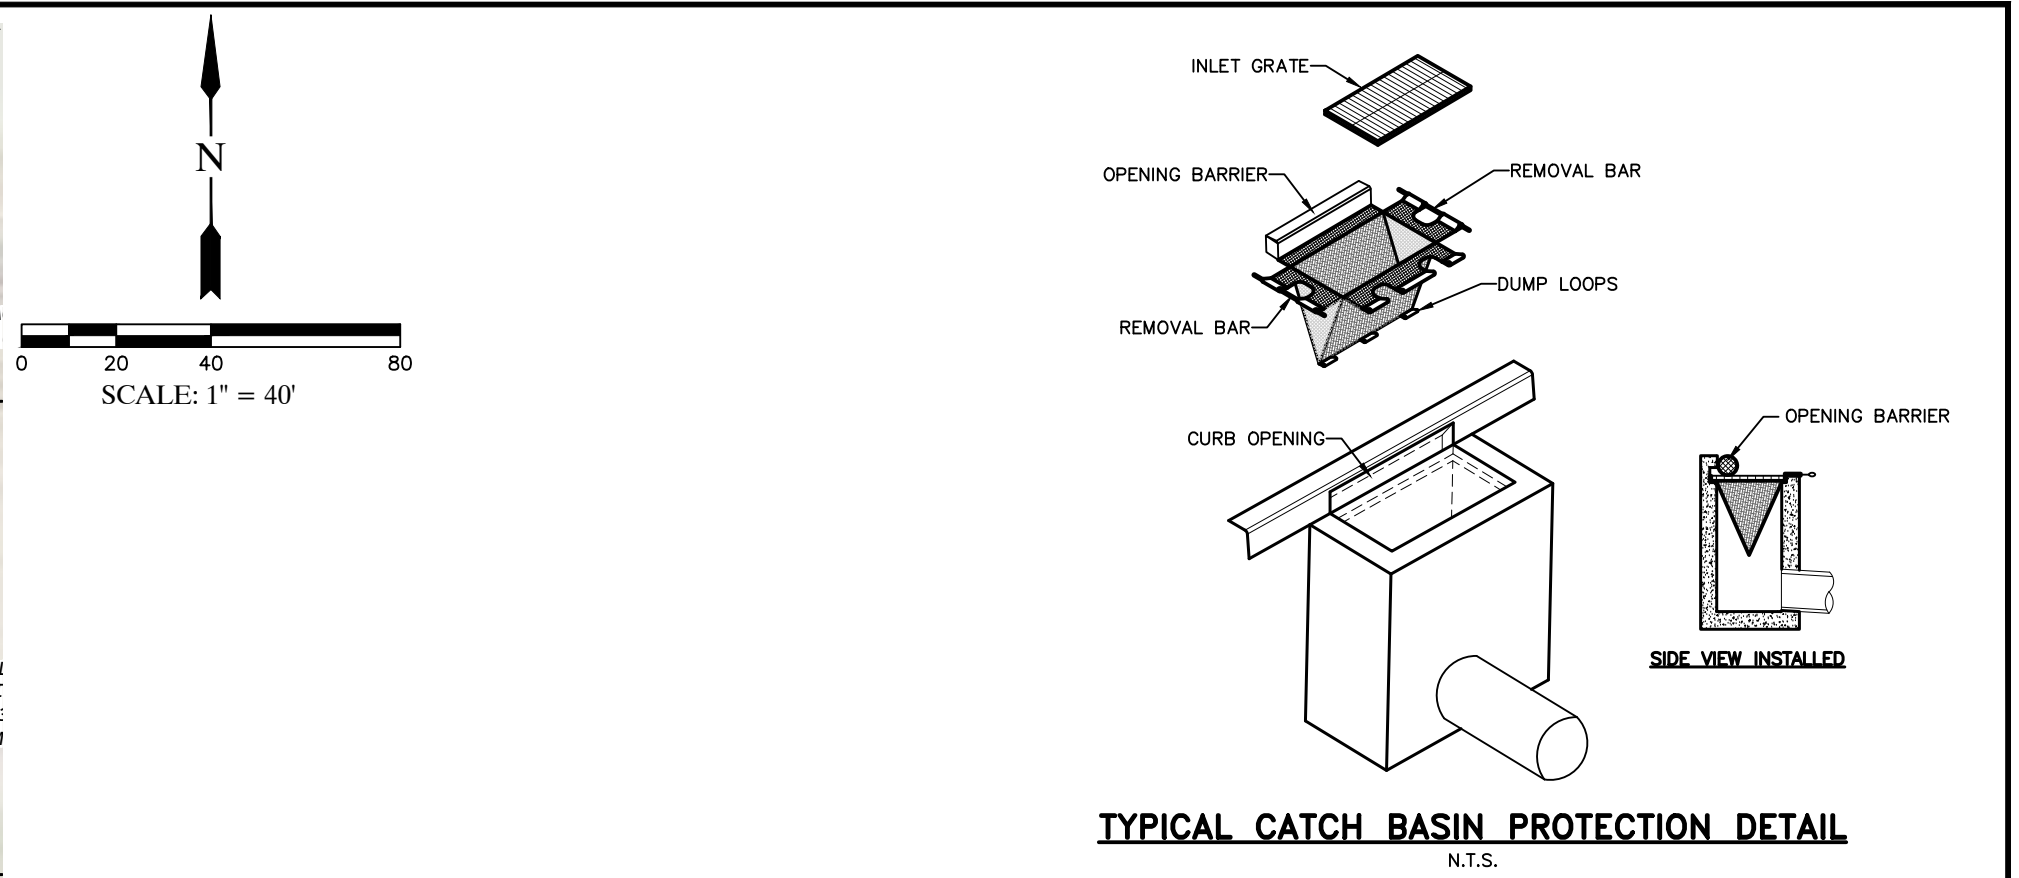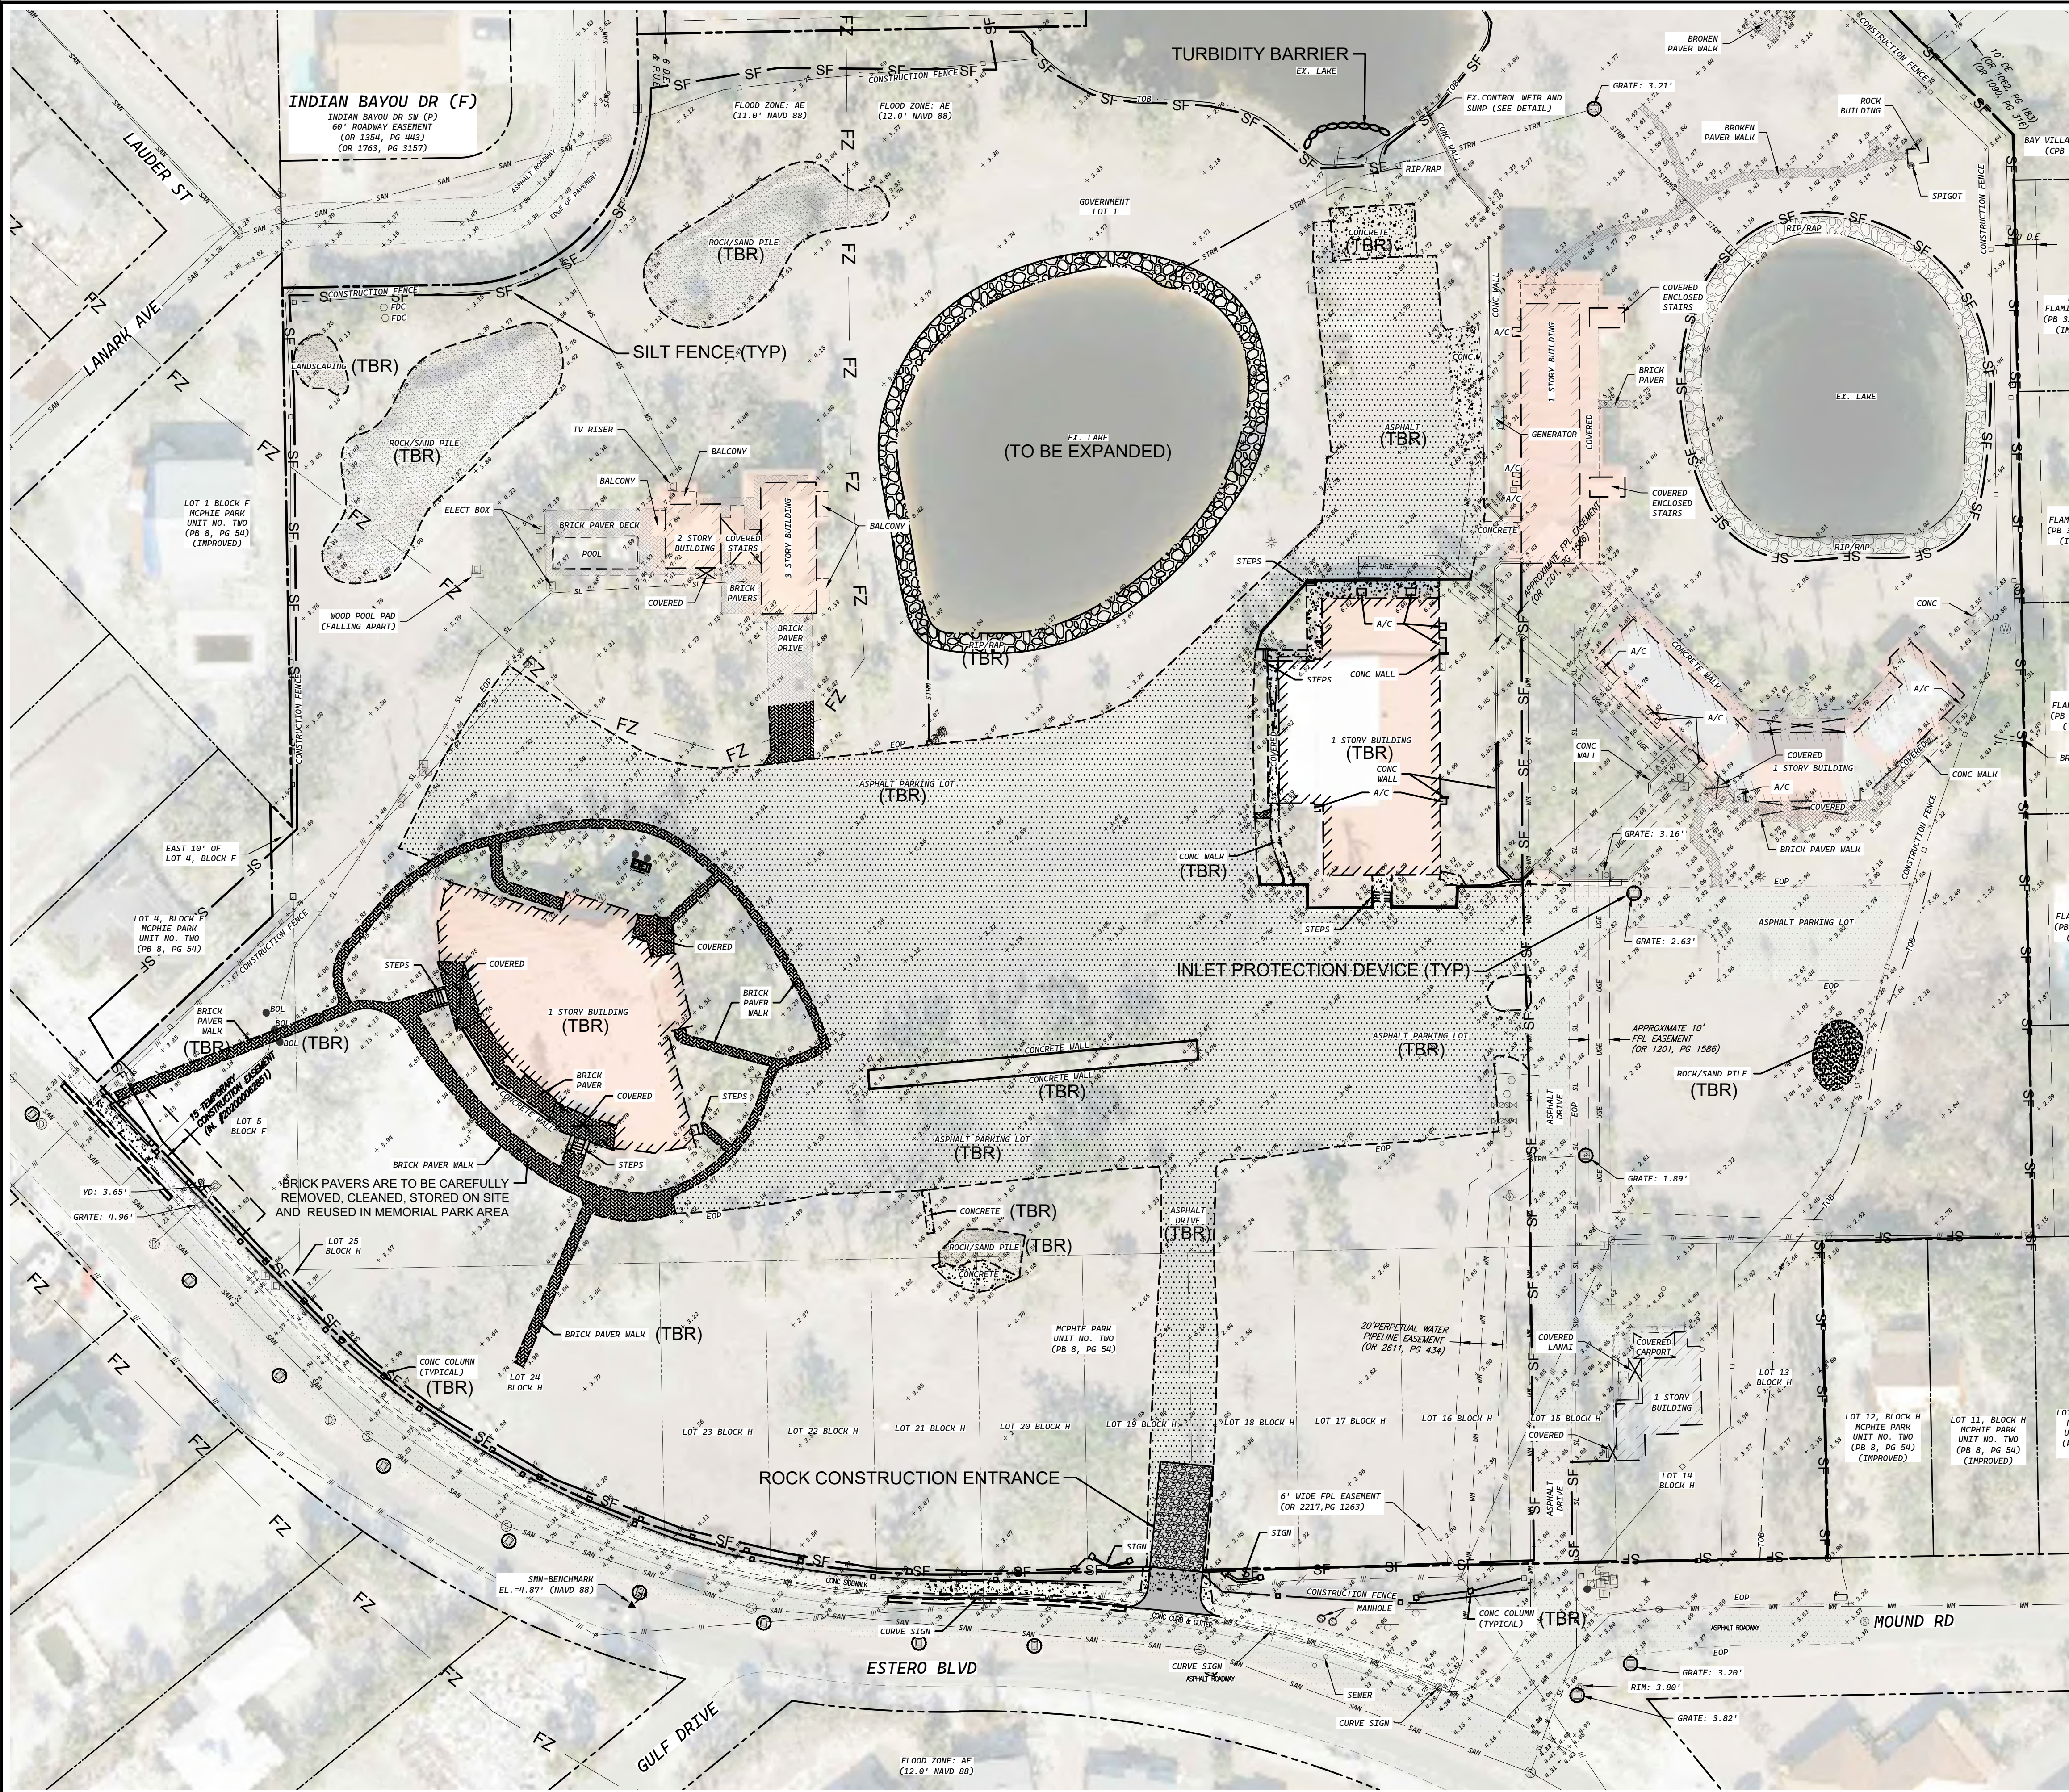

- TOWN OF FT. MYERS BEACH STANDARD DETAIL NO. 10.43 SEDIMENT CONTROL FILTER BARRIER DETAILS**
- DATE: 08/06/14 NOT TO SCALE
- TOWN OF FT. MYERS BEACH STANDARD DETAIL NO. 10.45 SEDIMENT CONTROL GENERAL NOTES**
- DATE: 08/06/14 NOT TO SCALE
- CLEARING/DEMOLITION NOTES:**
- CONTRACTOR TO DEMOLISH AND REMOVE ALL IMPROVEMENTS WITHIN LIMITS OF THE PROJECT SHOWN OTHERWISE NOTED.
 - CONTRACTOR SHALL CLEAR ALL EXCAVATION AND FILL AREAS. ACTUAL LIMITS OF CLEARING SHALL BE DETERMINED IN THE FIELD BY OWNER AND/OR ENGINEER.
 - CONTRACTOR TO ESTABLISH AND PROPERLY FLAG PROPERTY LINES/CLEARING LIMITS PRIOR TO CLEARING.
 - THE CONTRACTOR SHALL COORDINATE THE REMOVAL OF ANY EXISTING UTILITIES WITH THE OWNER OF SAID UTILITY. THIS SHALL INCLUDE WATER, SEWER, GAS, CABLE TV, POWER AND TELEPHONE.
 - THE CONTRACTOR SHALL LOCATE ALL EXISTING UTILITIES PRIOR TO CLEARING AND/OR DEMOLITION (AS APPLICABLE) AND WILL BE RESPONSIBLE FOR THE DAMAGE OF ANY ON-SITE OR OFF-SITE UTILITIES THAT ARE NOT A PART OF THIS PROJECT AND NOT IDENTIFIED TO BE REMOVED.
 - IF PREHISTORIC OR HISTORIC ARTIFACTS, SUCH AS POTTERY OR CERAMICS, STONE TOOLS OR METAL IMPLEMENTS, OR ANY OTHER PHYSICAL REMAINS THAT COULD BE ASSOCIATED WITH NATIVE AMERICAN CULTURES, OR EARLY COLONIAL OR AMERICAN SETTLEMENT ARE ENCOUNTERED AT ANY TIME WITHIN THE PROJECT SITE AREA, THE PERMITTED PROJECT SHOULD CEASE ALL ACTIVITIES INVOLVING SUBSURFACE DISTURBANCE IN THE IMMEDIATE VICINITY OF SUCH DISCOVERIES. THE PERMITTEE, OR OTHER DESIGNER, SHOULD CONTACT THE FLORIDA DEPARTMENT OF STATE, DIVISION OF HISTORICAL RESOURCES. REVIEW AND COMPLIANCE SECTION AT (850) 245-6333 OR (800) 847-7276, AS WELL AS THE APPROPRIATE PERMITTING AGENCY OFFICE. PROJECT ACTIVITIES SHOULD NOT RESUME WITHOUT VERBAL AND/OR WRITTEN AUTHORIZATION FROM THE DIVISION OF HISTORICAL RESOURCES. IN THE EVENT THAT UNMARKED HUMAN REMAINS ARE ENCOUNTERED DURING PERMITTED ACTIVITIES, ALL WORK SHALL STOP IMMEDIATELY AND THE PROPER AUTHORITIES NOTIFIED IN ACCORDANCE WITH SECTION 87.05, FLORIDA STATUTES.
 - THE CONTRACTOR IS RESPONSIBLE FOR THE LEGAL DISPOSAL OF ALL DEMOLITION/CLEARING DEBRIS OFF OWNERS PROPERTY.
 - REMOVAL OF ASBESTOS CONTAINING MATERIALS (IF ANY) SHALL BE IN ACCORDANCE WITH THE REGULATORY STANDARDS.
 - THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVAL AND DISPOSAL OF ALL TREES, BRUSH, STUMPS, AND DEBRIS (INCLUDING EXISTING STRUCTURES) NOT REQUIRED TO REMAIN IN THE PROPOSED CONSTRUCTION AREA WHERE SO DEPICTED AS THE OWNER'S REPRESENTATIVE. TREES AND VEGETATION WITHIN THE CLEARING LIMITS SHALL BE PROTECTED, LEFT STANDING, AND TRIMMED TO PREVENT DAMAGE TO LIMES AND ROOTS DURING CONSTRUCTION.
 - UNDERGROUND IRRIGATION, ELECTRIC, CABLE TV, PHONE, ETC. MAY EXIST AT THE SITE AND HAVE NOT BEEN LOCATED.
 - PROTECTIVE BARRIERS WILL BE INSTALLED AT THE PERIMETER OF PRESERVED VEGETATION AT THE COMMENCEMENT OF ANY SITE IMPROVEMENTS AND WILL REMAIN IN PLACE UNTIL COMPLETION OF CONSTRUCTION. THE PROTECTIVE BARRIER SHALL BE HIGHLY VISIBLE WITH BRIGHTLY COLORED ALL-WEATHER MESH MATERIAL OR EQUIVALENT AND THE STAKES SHALL BE NO MORE THAN 10-FEET APART.
 - VEGETATION REMOVAL PERMIT TO BE APPLIED FOR PRIOR TO SILT FENCE INSTALLATION. COLLIER COUNTY ENVIRONMENTAL SERVICES TO INSPECT CLEARING LIMITS AND ISSUE PERMIT. ONCE PERMIT IS ISSUED, SILT FENCE TO BE INSTALLED, THEN CLEARING MAY COMMENCE.

			CHURCH OF THE ASCENSION					
RDA CONSULTING ENGINEERS, LLC.			EROSION CONTROL AND DEMOLITION PLAN					
NAPLES OFFICE: 791 10 TH STREET SOUTH, SUITE 300, NAPLES, FL 34102 PHONE: (239) 649-1551			BONITA SPRINGS OFFICE: 8000 HEALTH CENTER BLVD., SUITE 200, BONITA SPRINGS, FL 34135 FAX: (239) 649-7112			ORLANDO OFFICE: 801 INTERNATIONAL PKY., SUITE 500, LAKE MARY, FL 32746 WWW.RDAFL.COM		
NO. DATE DESCRIPTION BY			DATE: 08/06/14			PROJECT No.: 250219 SHEET: 4 of 14		

Exhibit No. 2.0

Permit No. 36-114951-P

Page 4 of 10

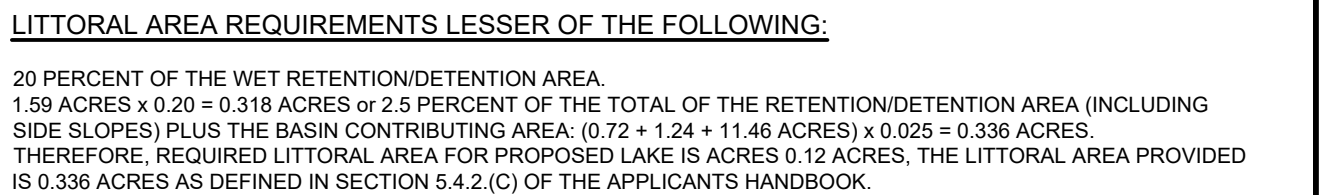
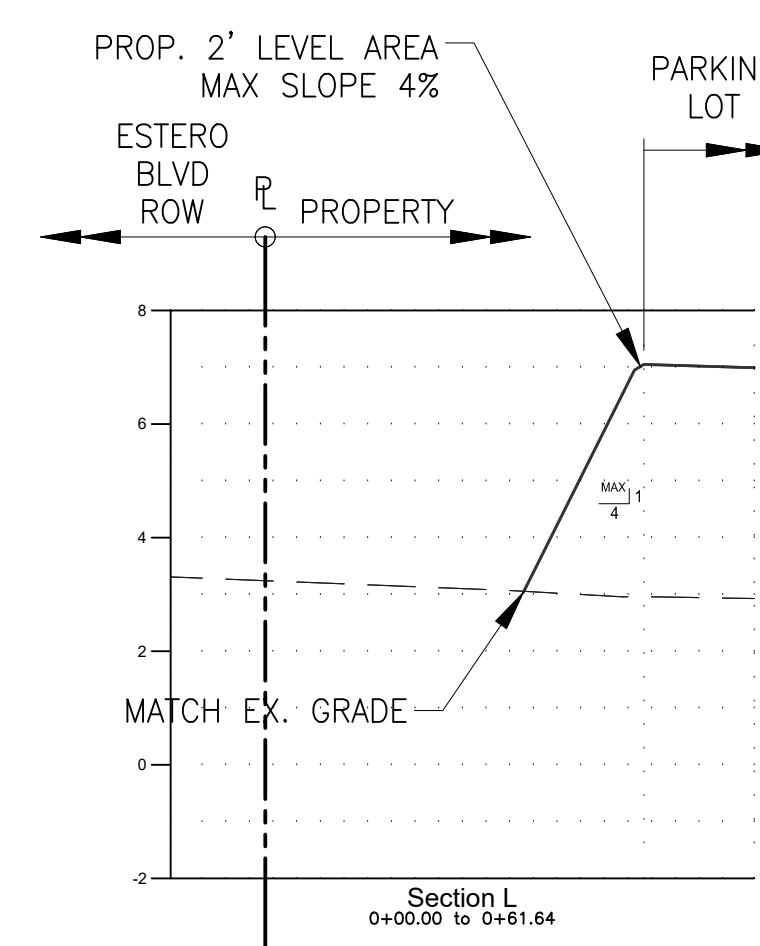
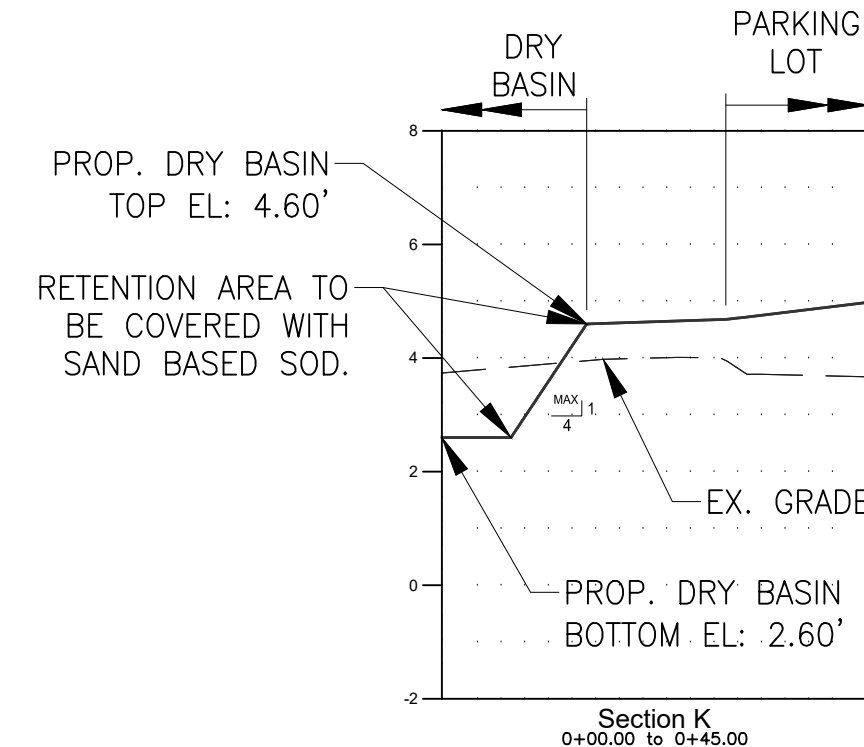
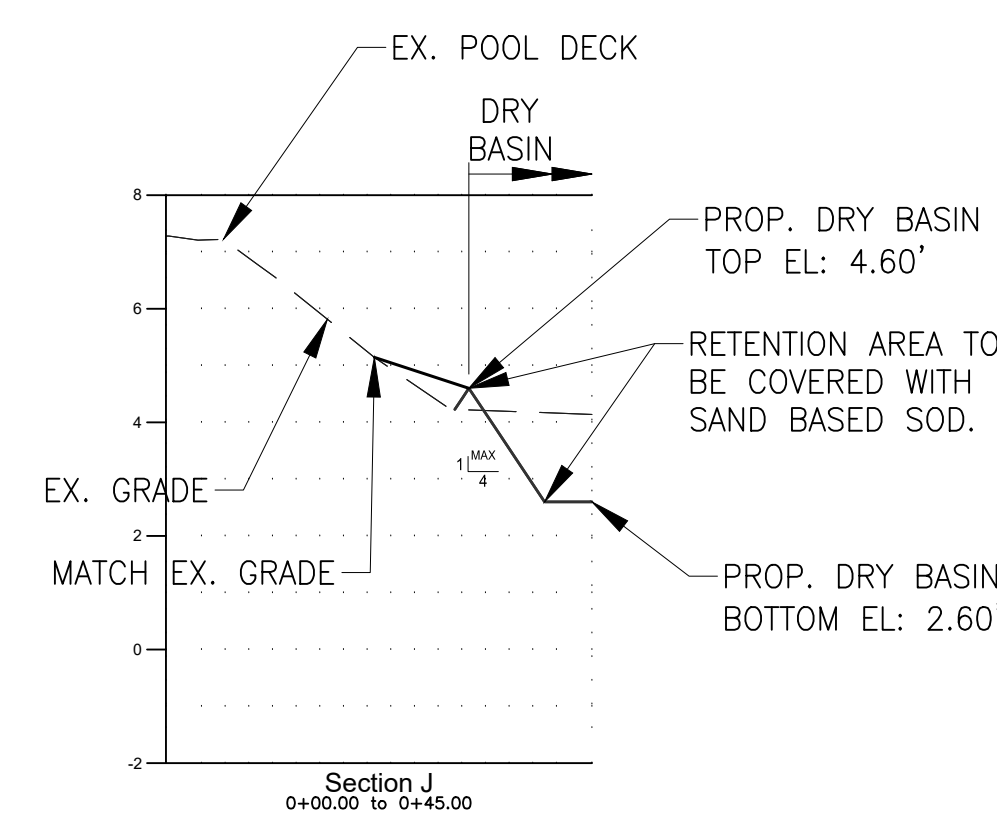
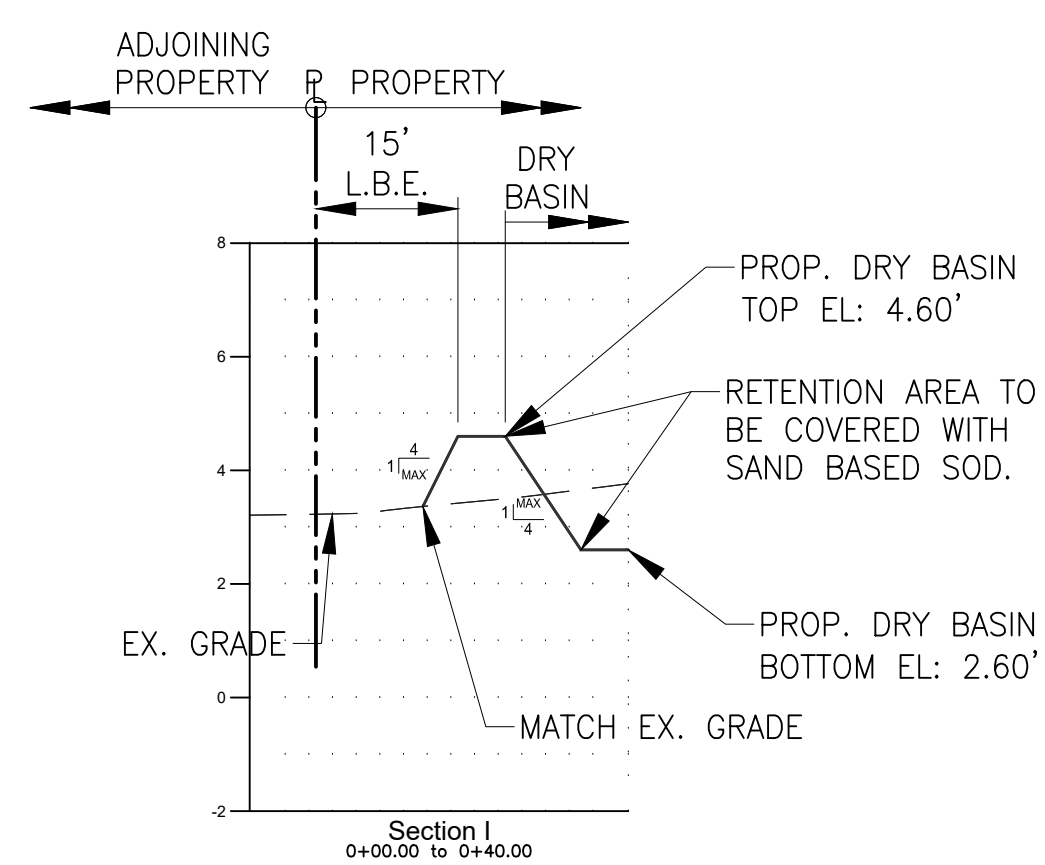
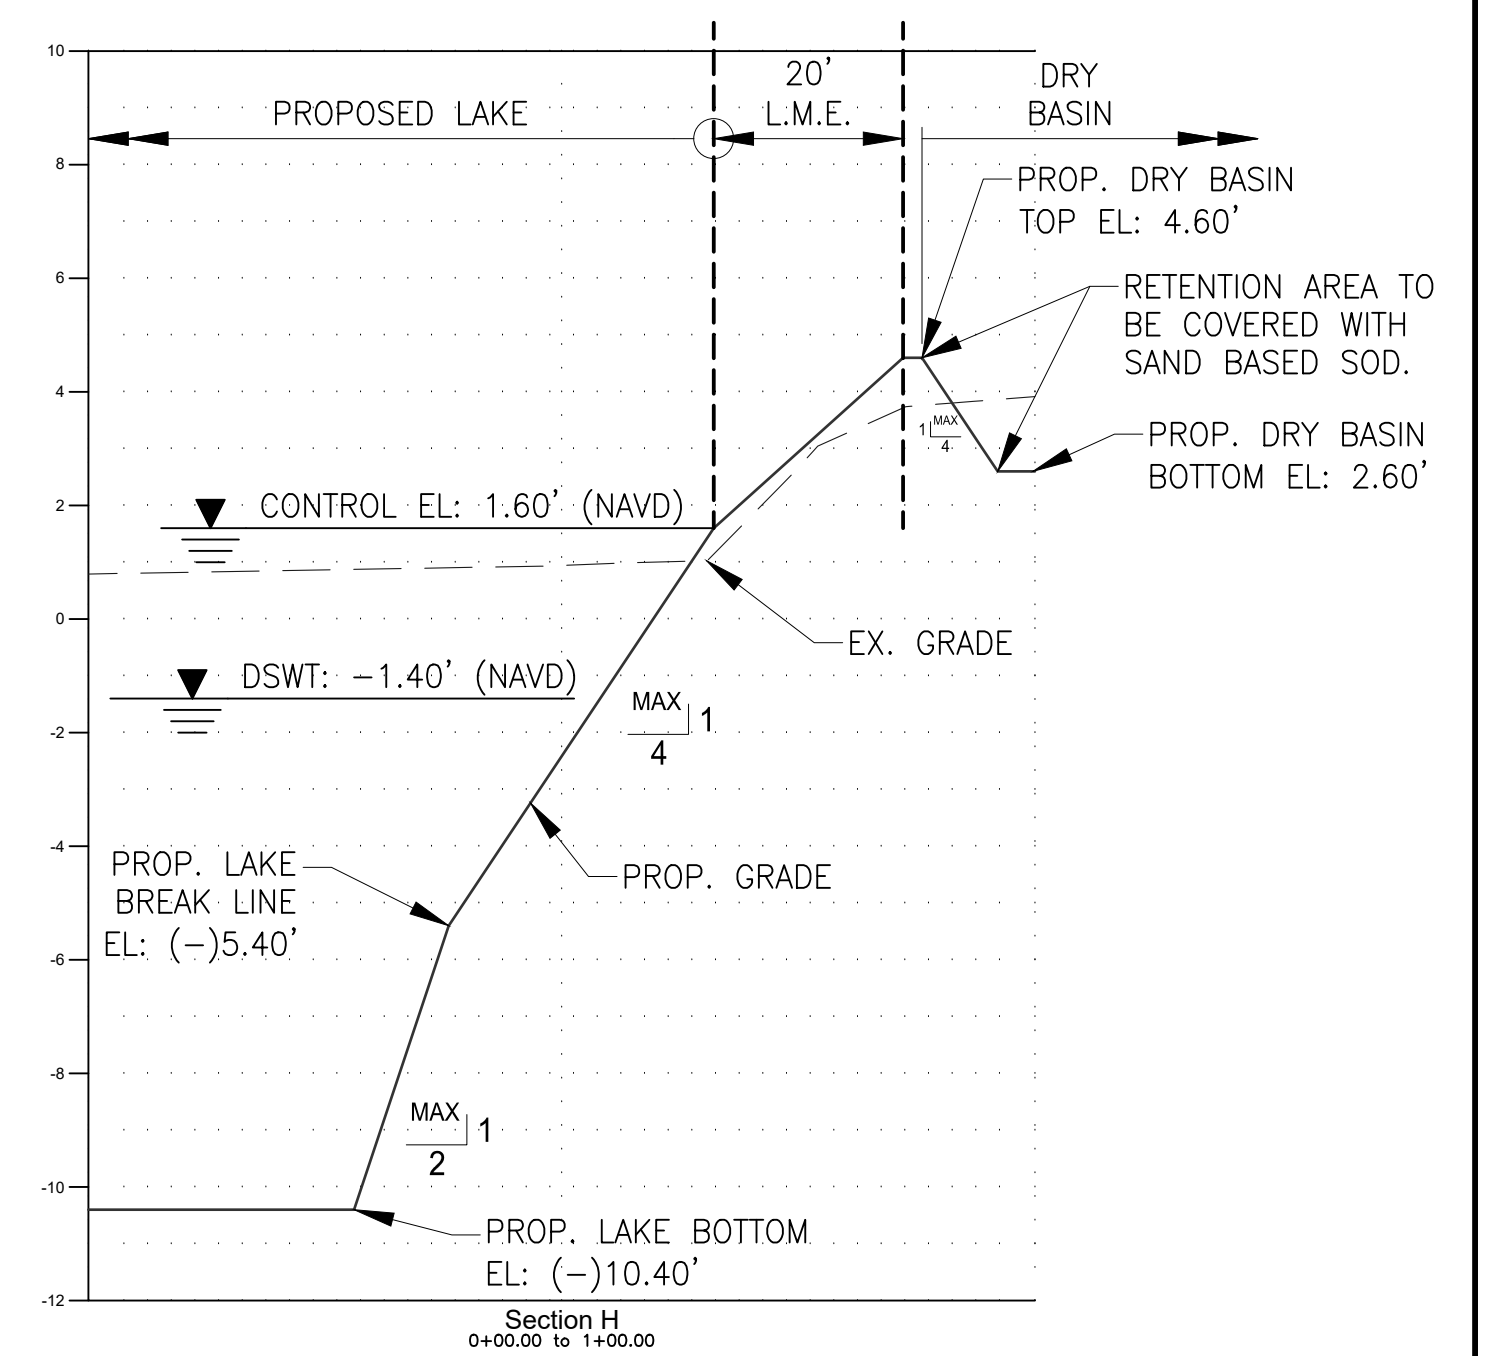
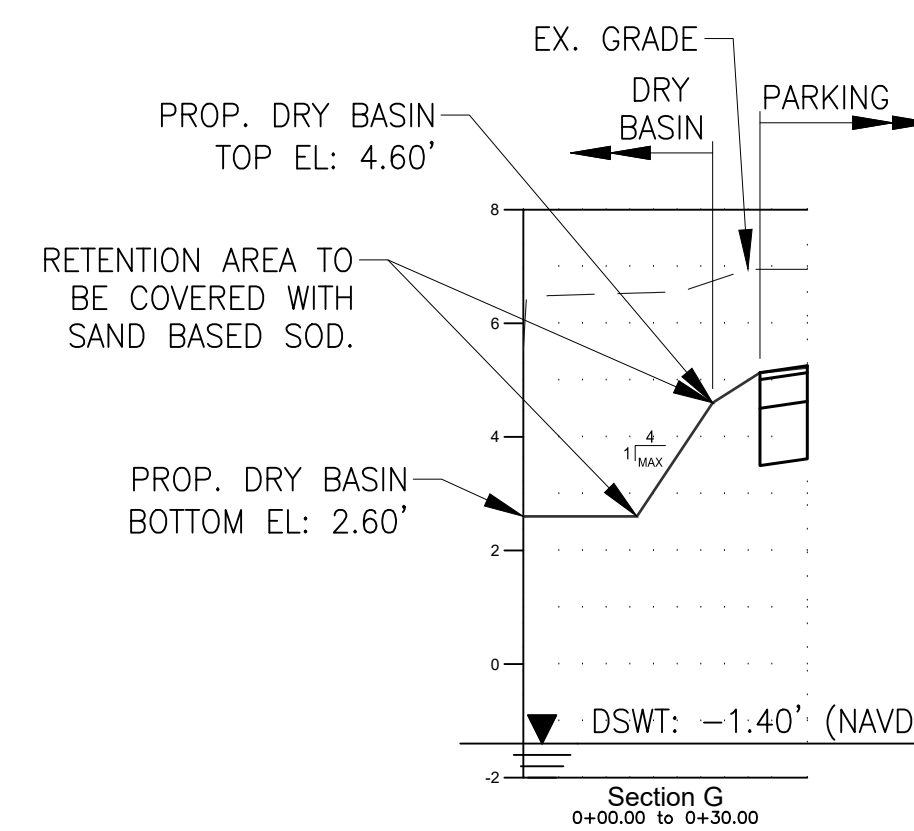
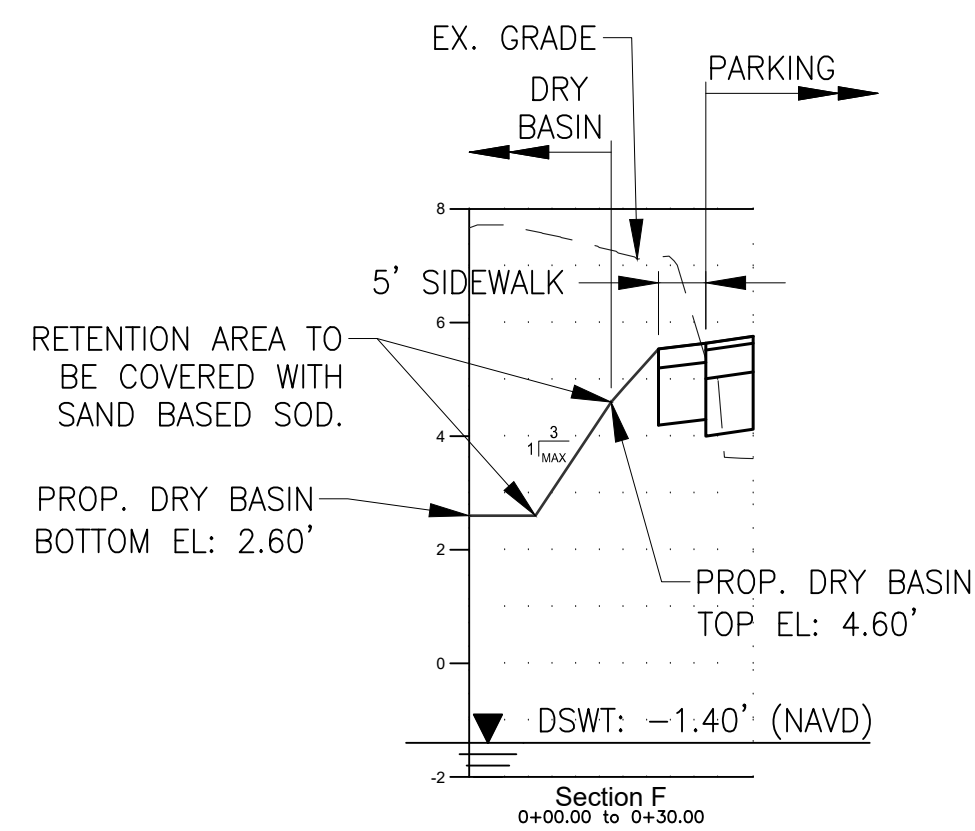
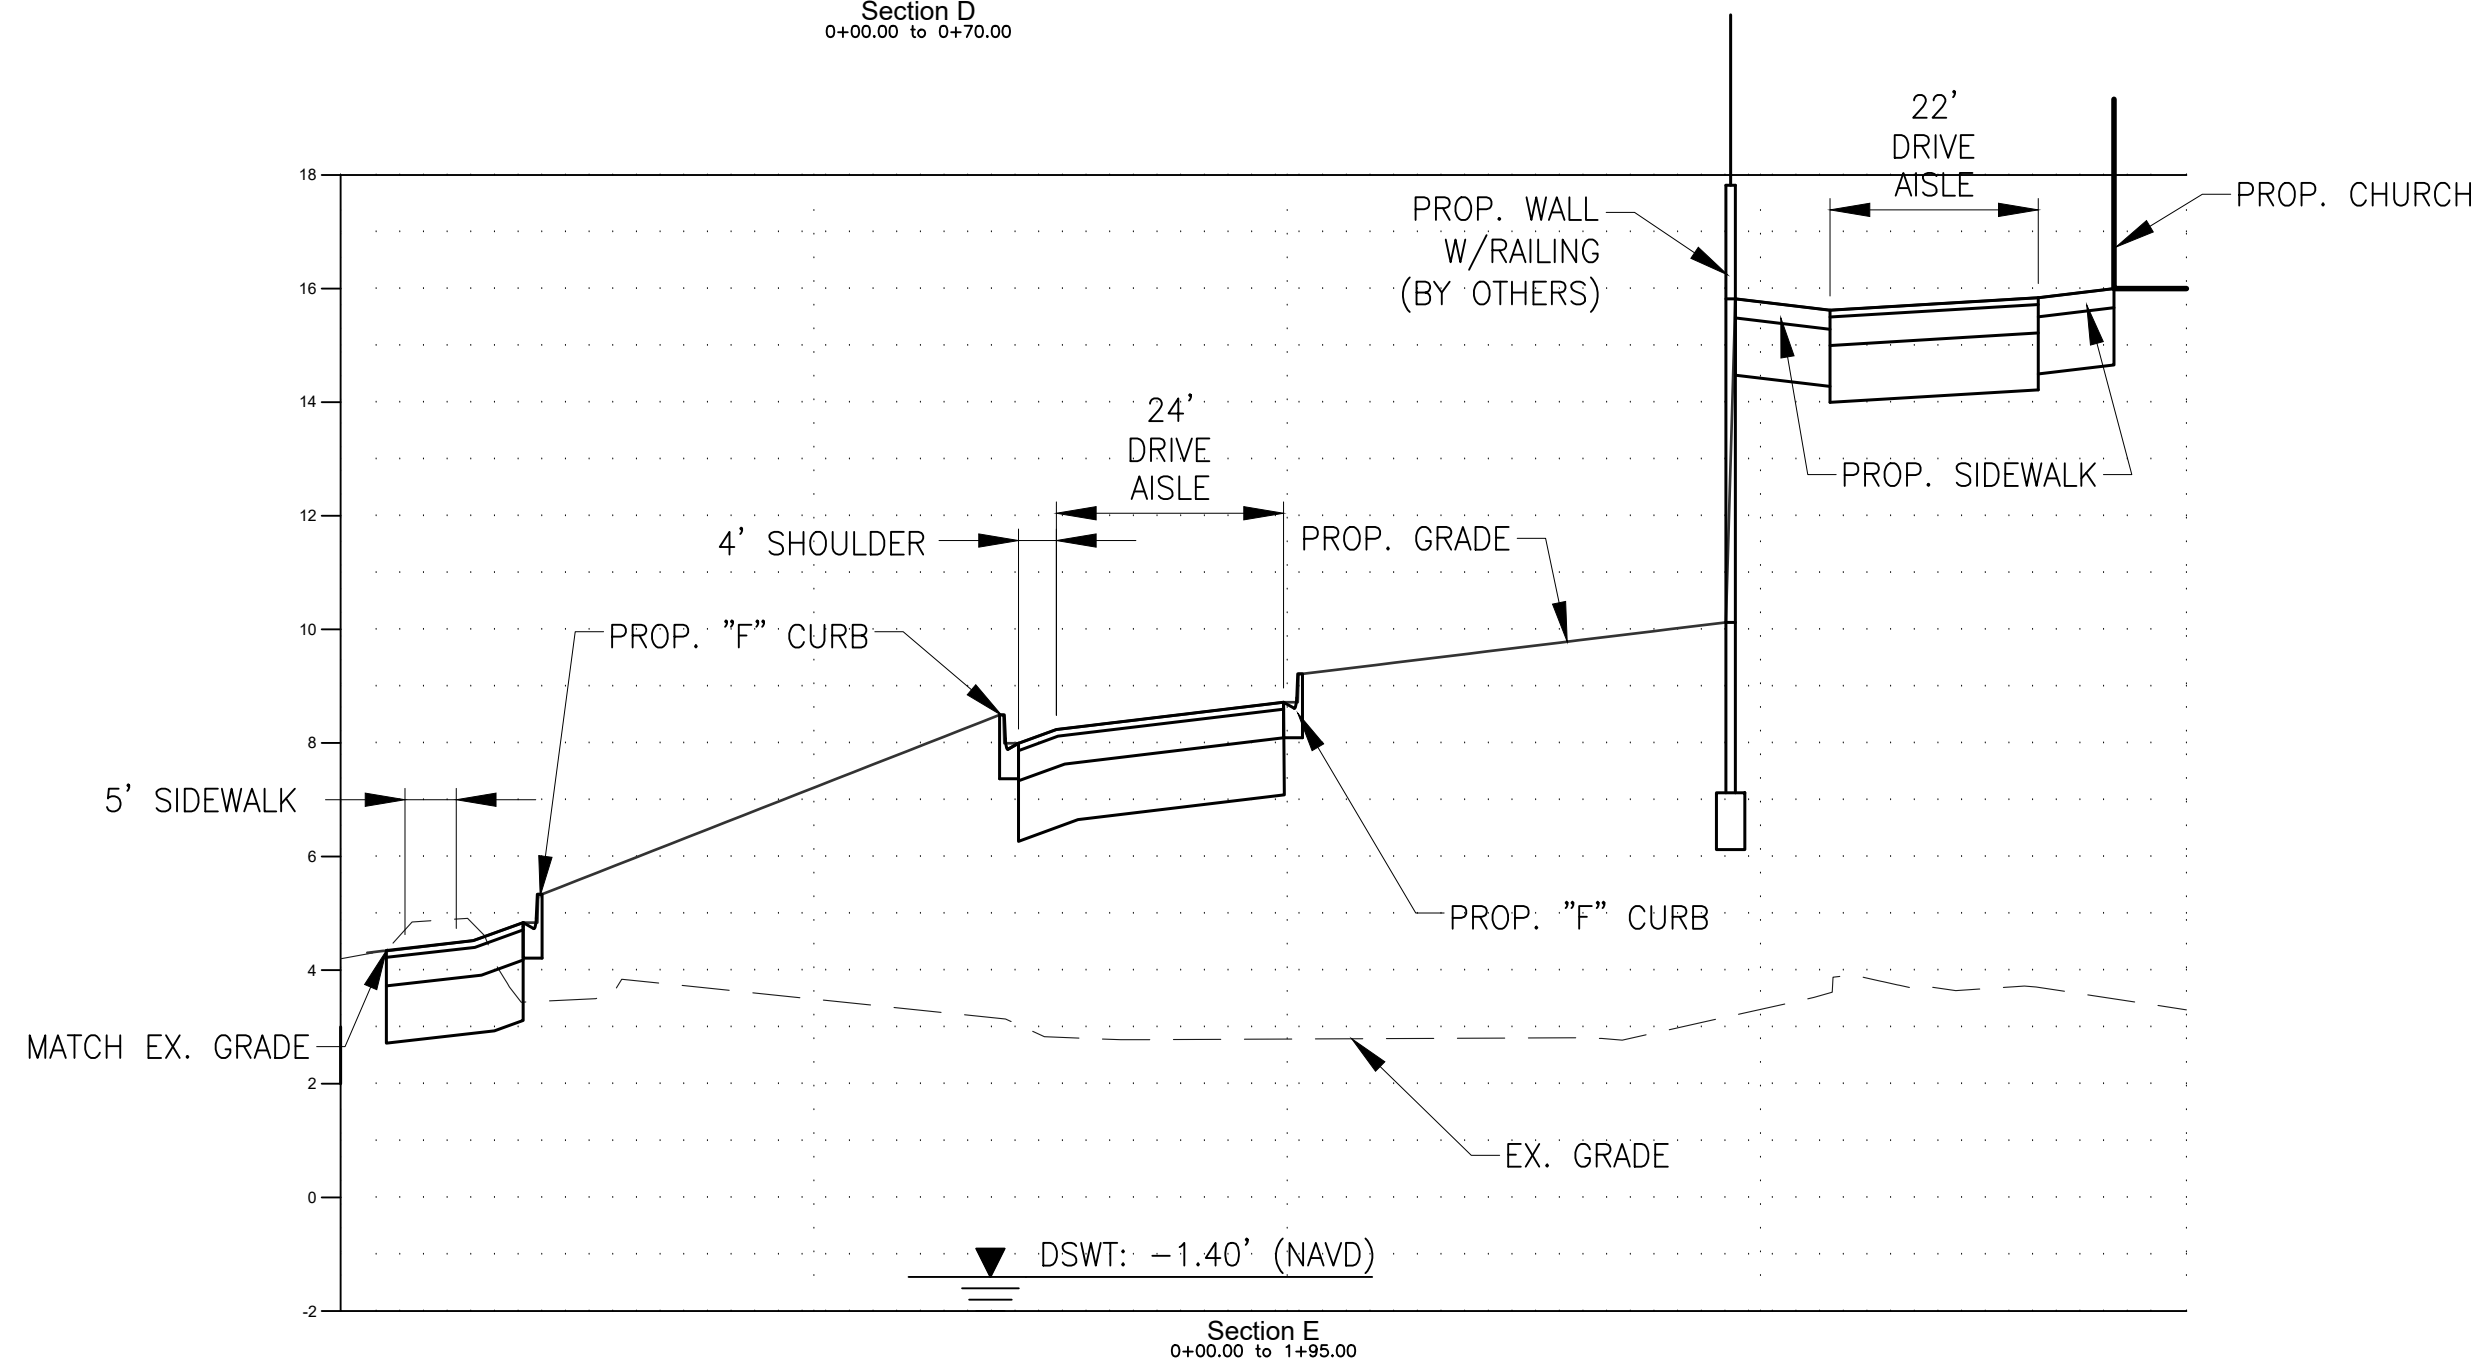
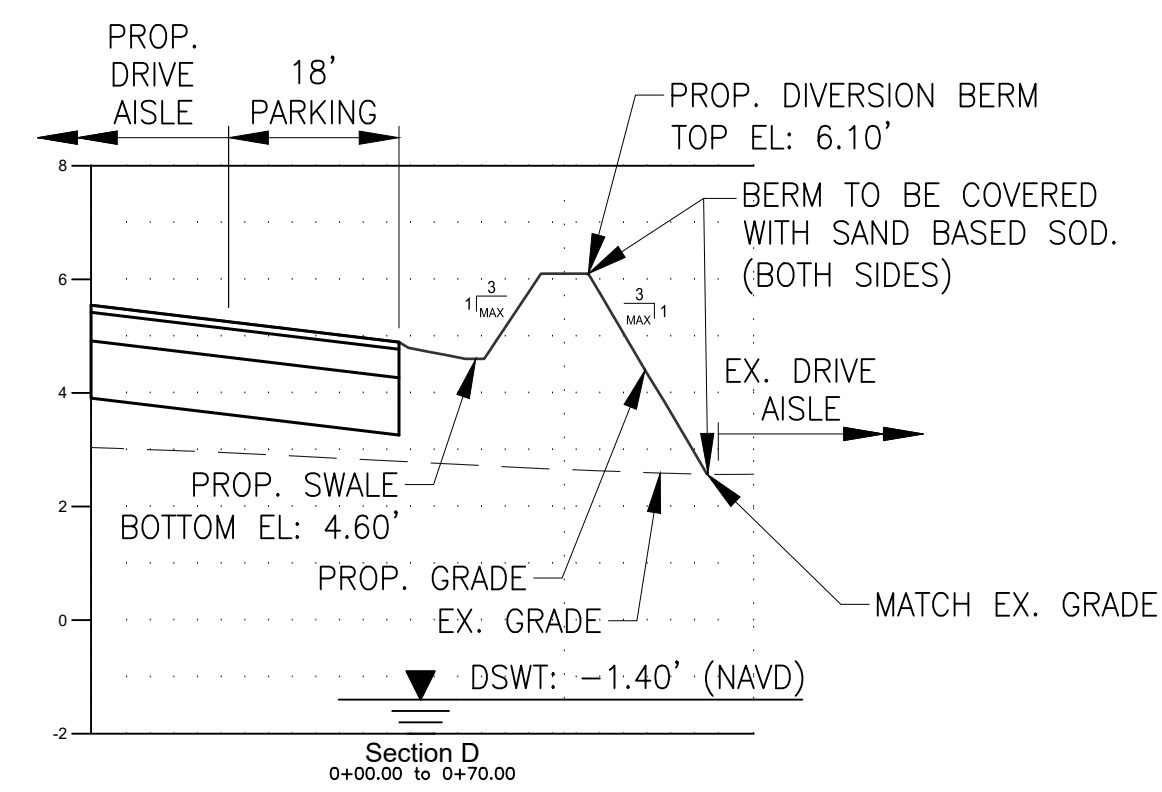
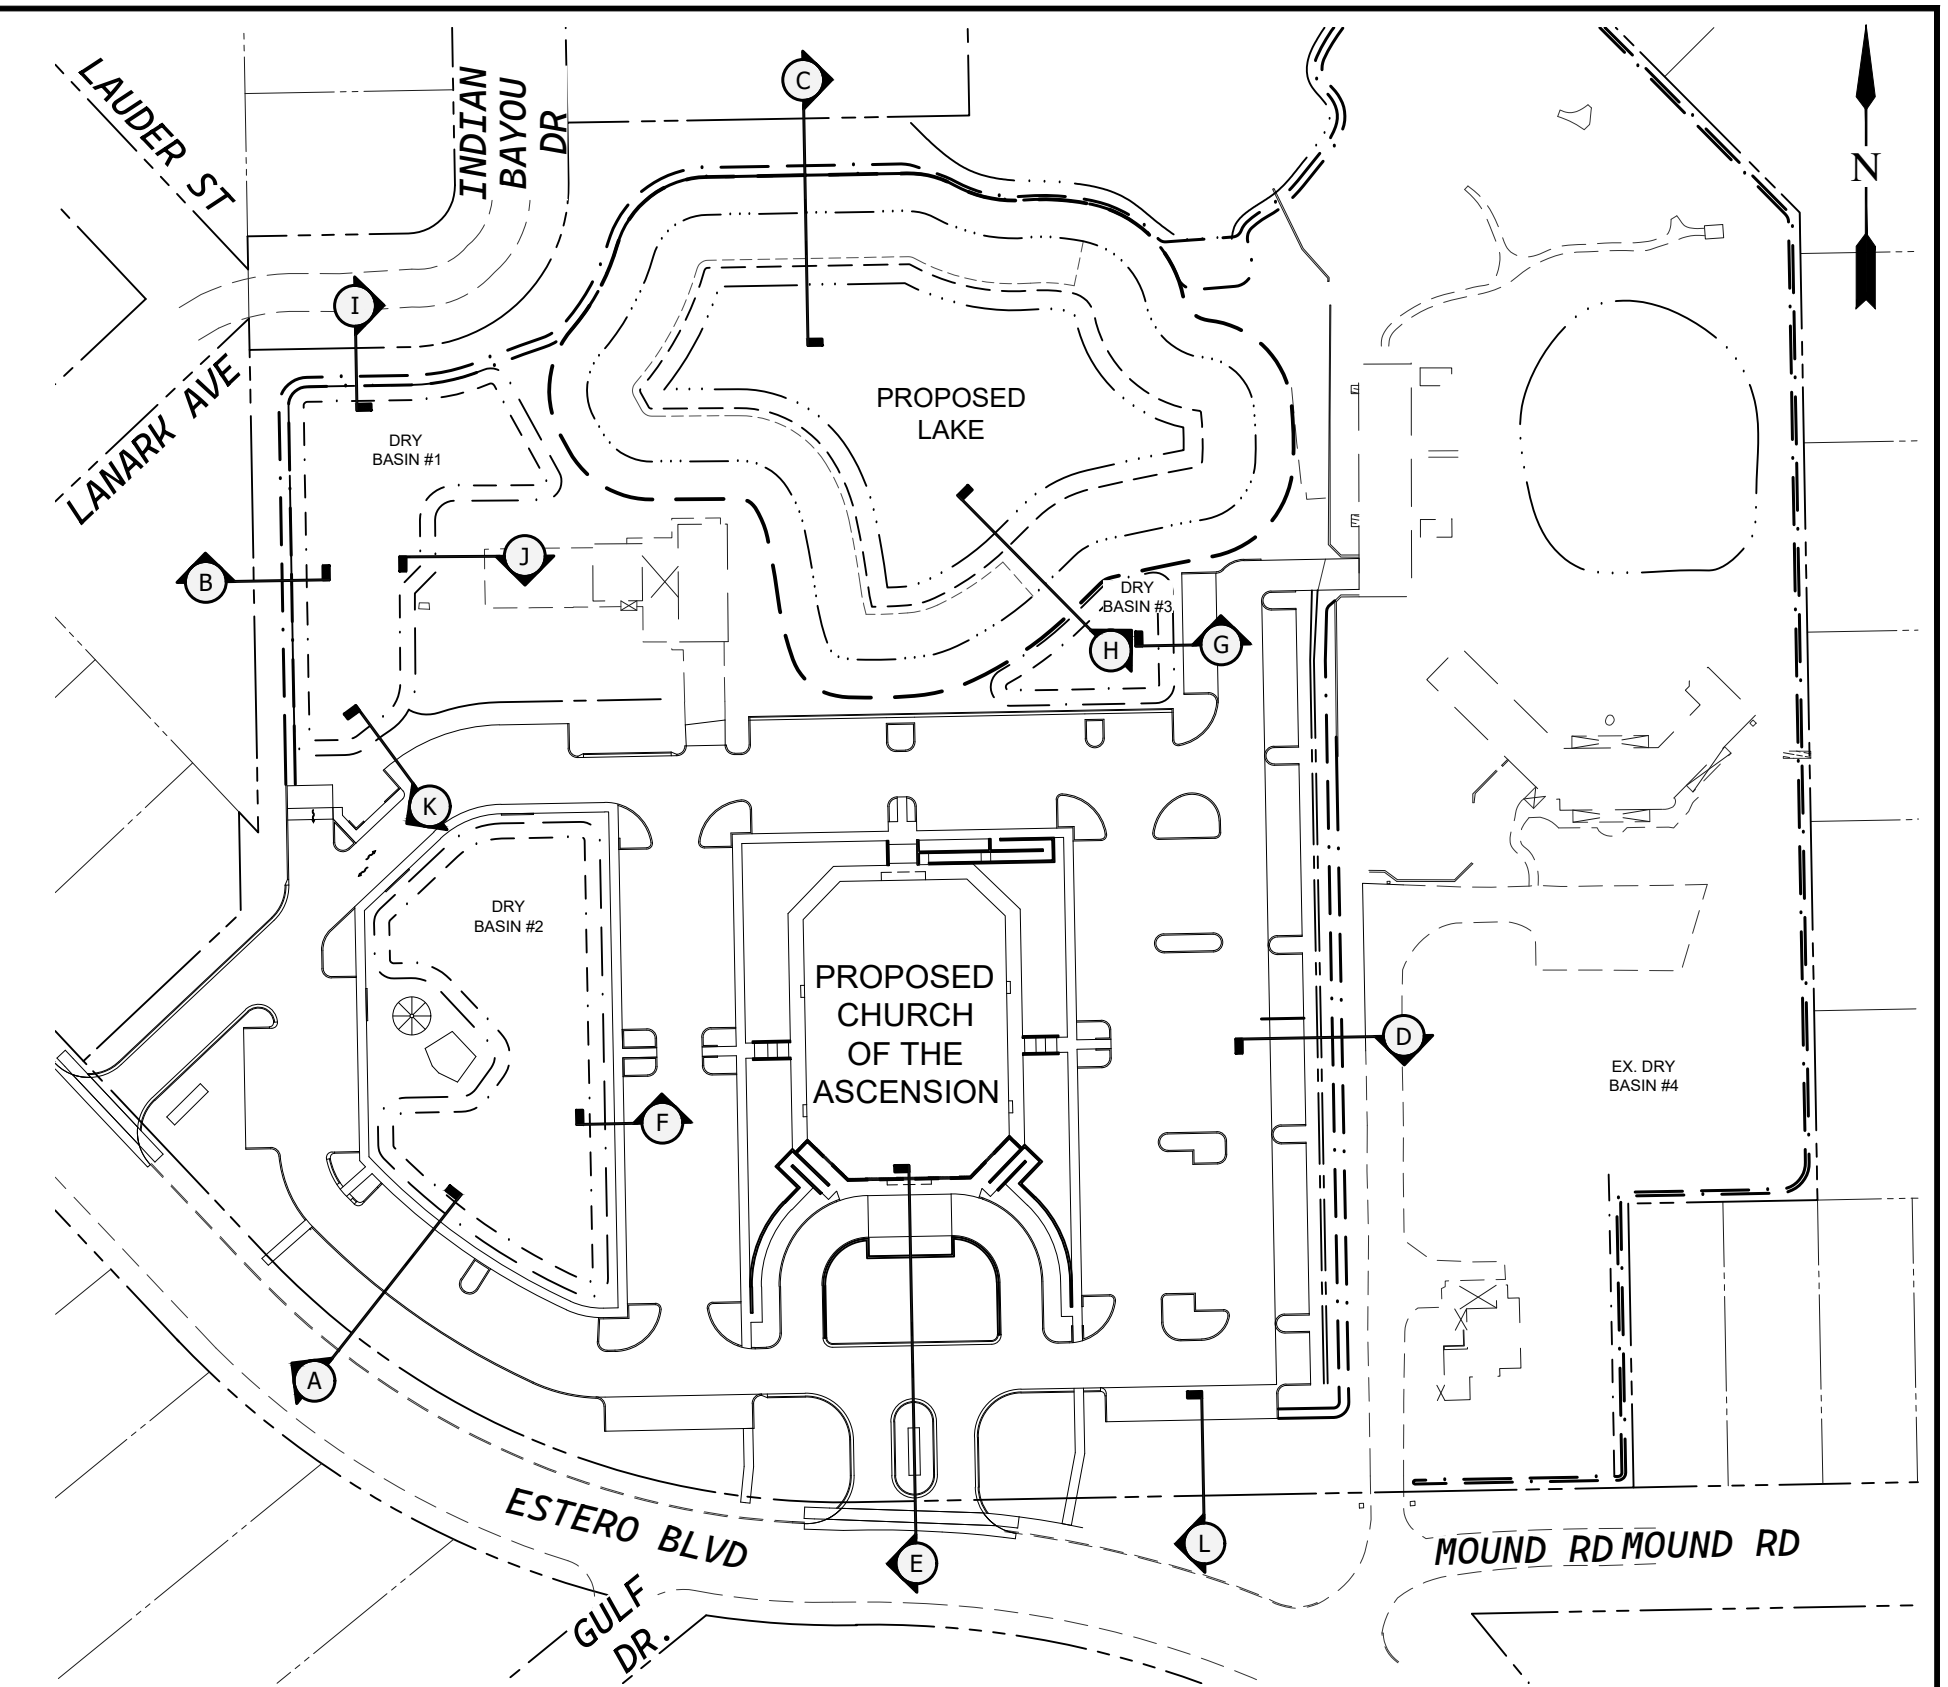
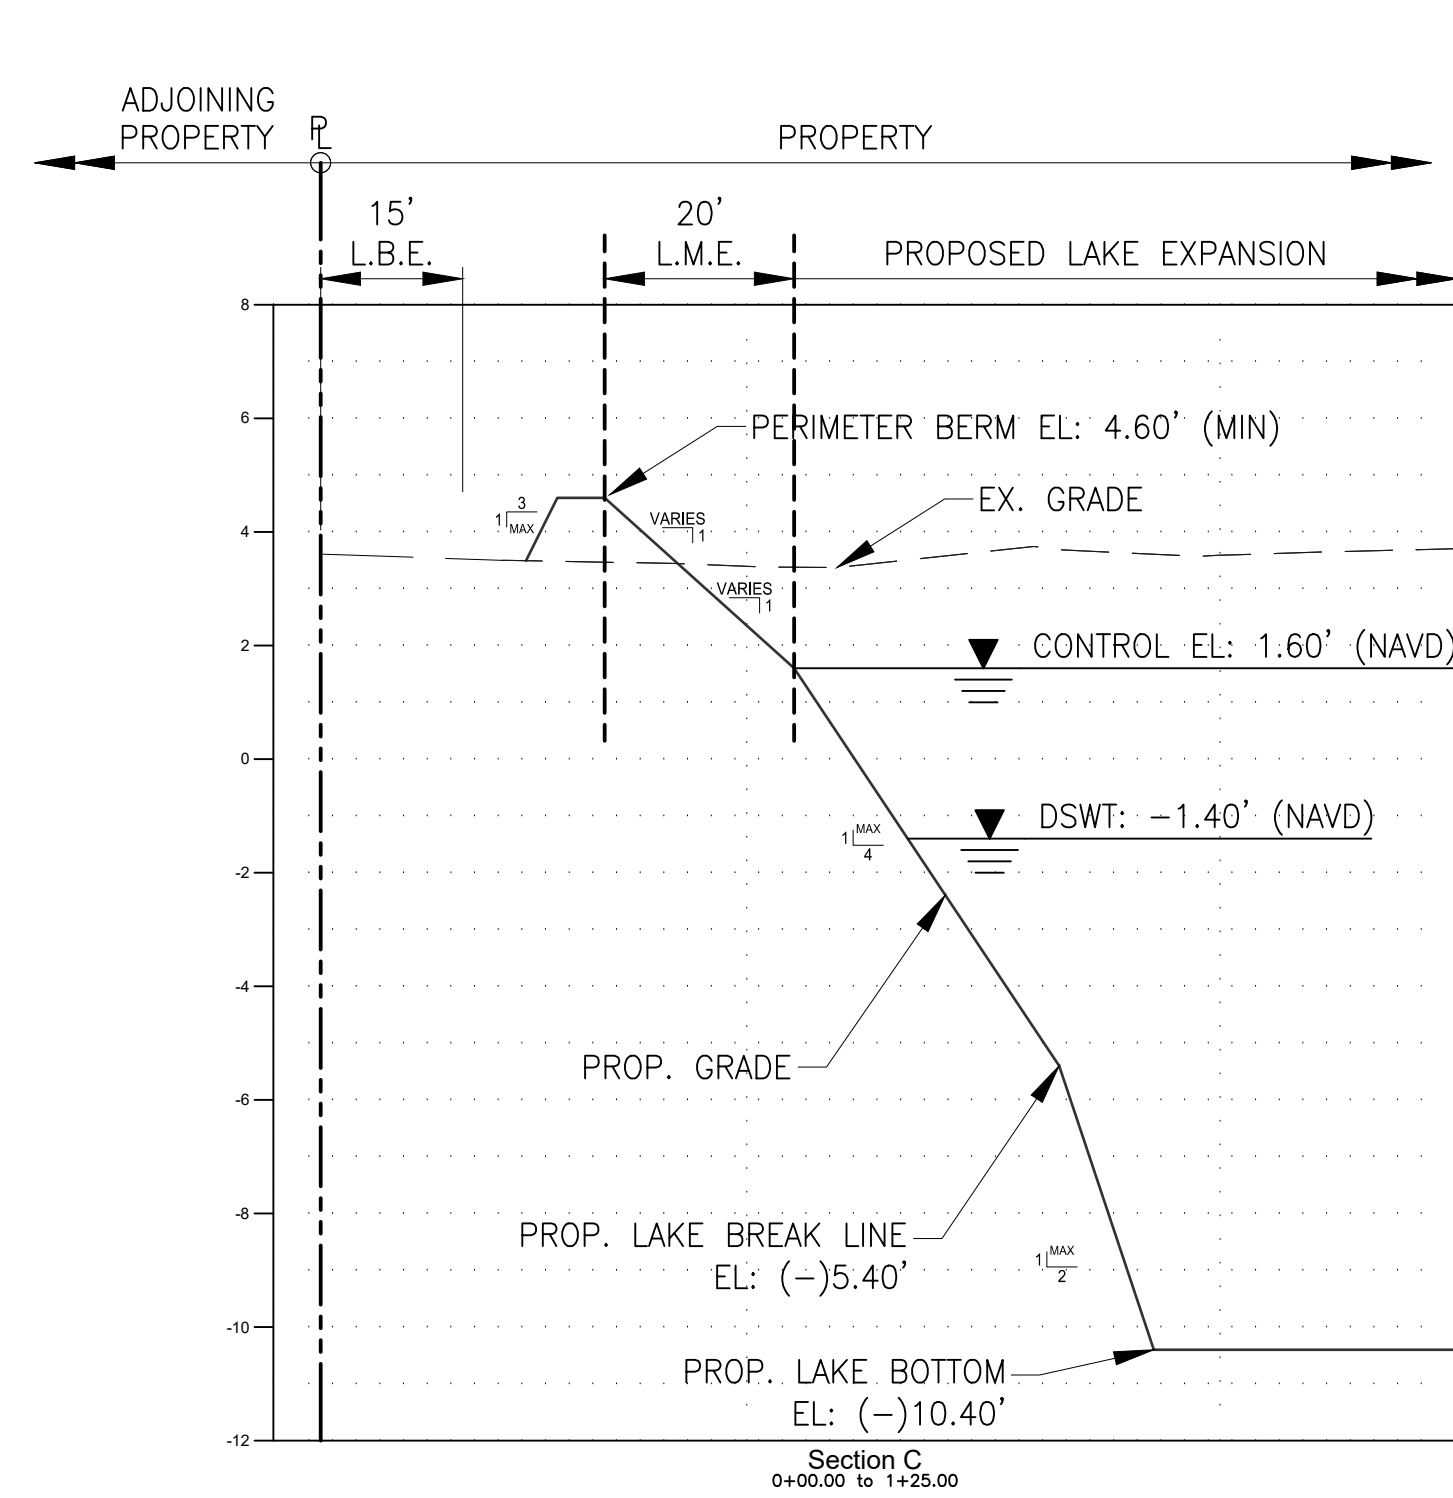
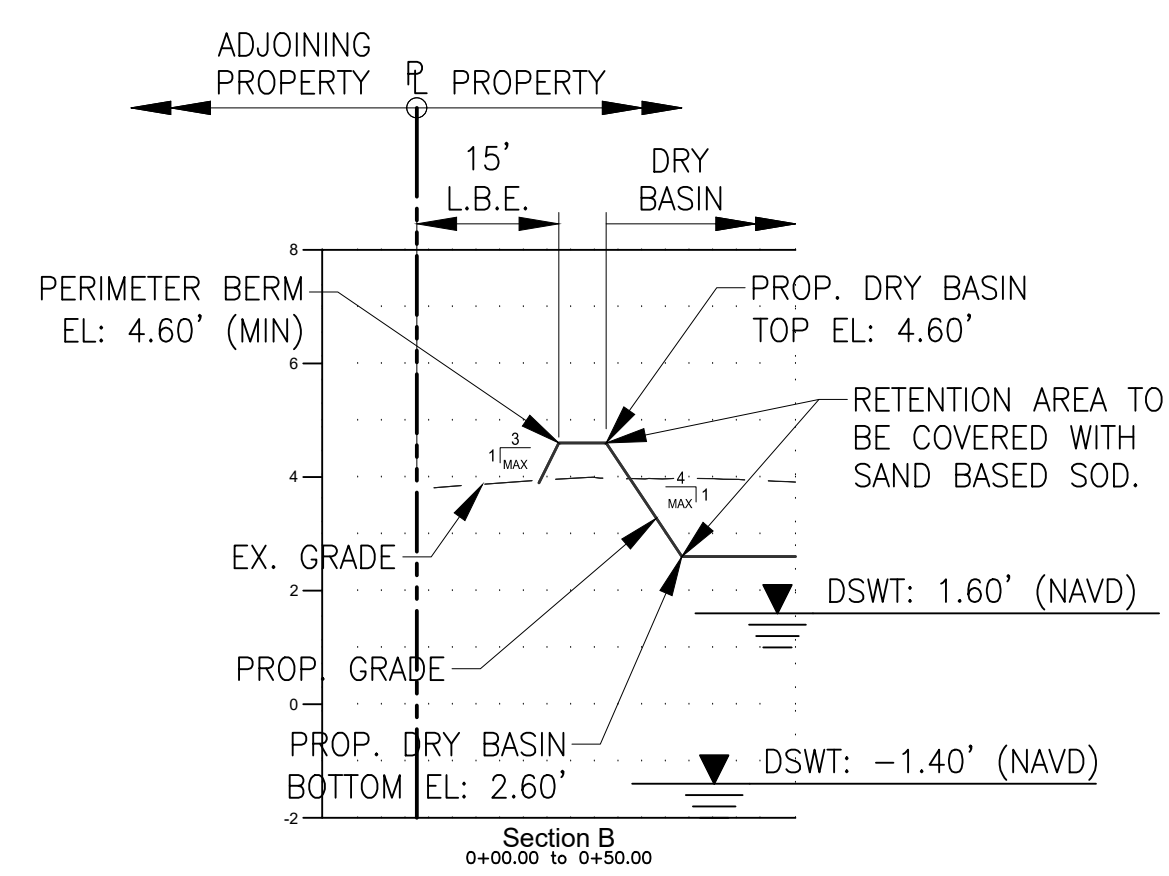
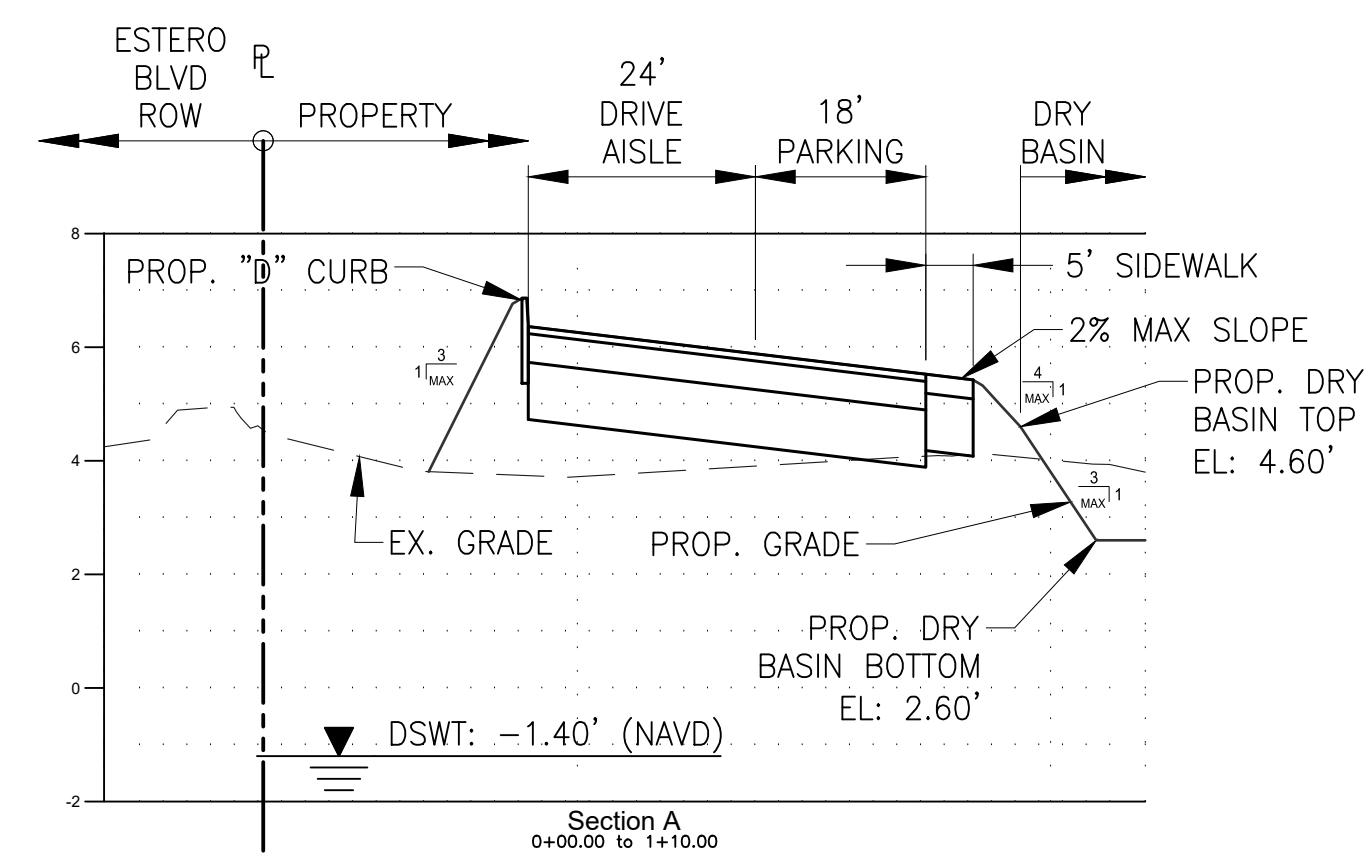
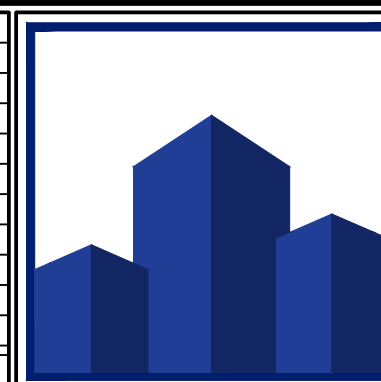


Exhibit No. 2.0 Permit No. 36-114951-P Page 6 of 10

[illegible]


RDA CONSULTING ENGINEERS, LLC.

NAPLES OFFICE: 791 10 TH STREET SOUTH, SUITE 302, NAPLES, FL 34102	BONITA SPRINGS OFFICE: 8000 HEALTH CENTER BLVD., SUITE 200, BONITA SPRINGS, FL 34135	ORLANDO OFFICE: 801 INTERNATIONAL PKWY SUITE 500, LAKE MARY, FL 32746
PHONE: (239) 649-1551	FAX: (239) 649-7112	WWW.RDAFL.COM

CHURCH OF THE ASCENSION

TYPICAL CROSS SECTIONS


DATUM NOTE:
ALL ELEVATIONS SHOWN REFERENCE NORTH AMERICAN VERTICAL DATUM 1988 (NAVD88) CONVERSION FACTOR TO NATIONAL GEODETIC VERTICAL DATUM 1929 (NGVD29) IS (+) 1.184

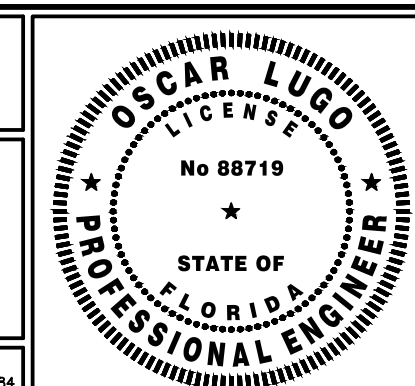


OSCAR LUGO, P.E.
FL. LICENSE NO. 88719
COA #31149

This item has been digitally signed and sealed by Oscar Lugo, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic documents.

SCALE:	1" = 100'	PROJECT No.:	250219
CHECKED BY:	O.L.	DATE:	SEPTEMBER 2025
DESIGNED BY:	C.G.K./H.H.	SHEET:	7 of 14
DRAWN BY:	C.G.K.		

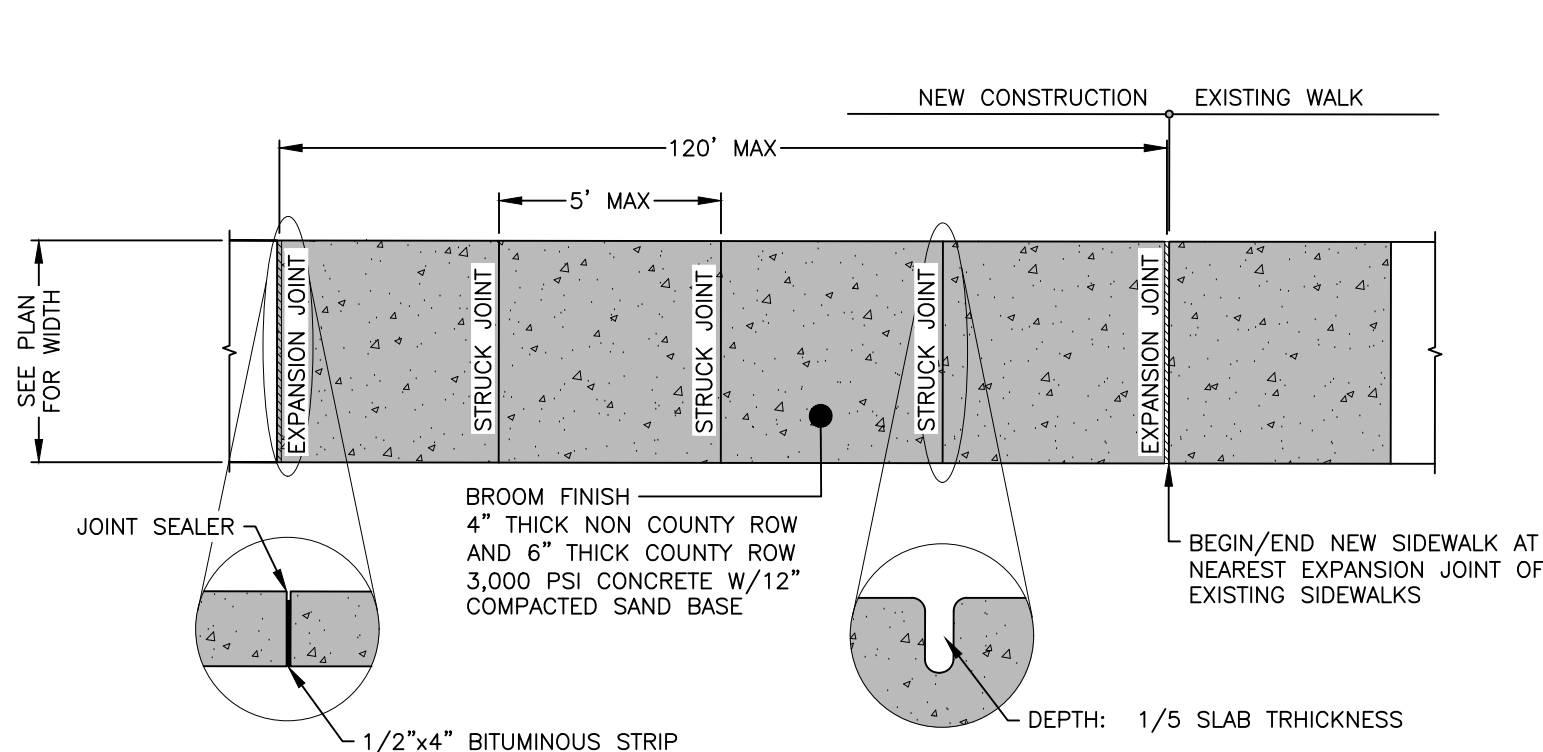


PLAN VIEW

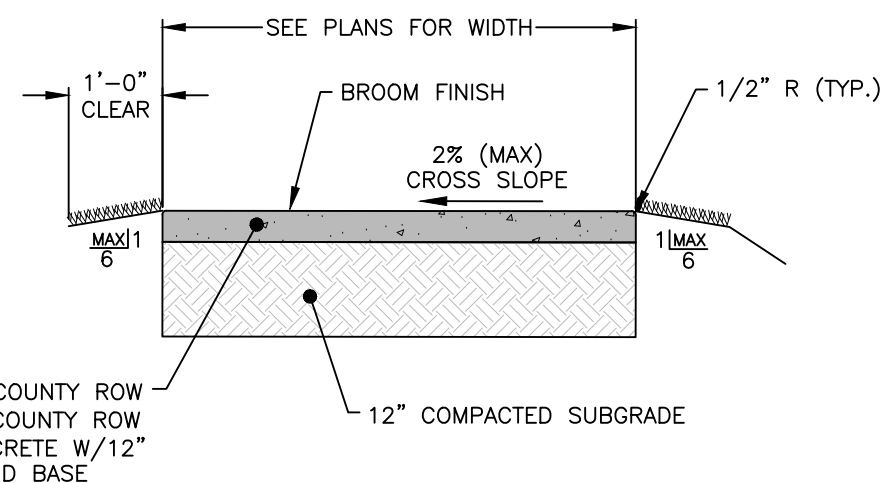


- NOTES:**
1. THE PROPOSED FILL SHALL BE COMPACTED IN 12" LIFTS TO 95% MAXIMUM DENSITY IN ACCORDANCE WITH AASHTO T-180 AND THE ENGINEER'S SPECIFICATIONS.
 2. SUBGRADE FOR THE CONCRETE SIDEWALK SHALL BE 12" THICK SAND, COMPACTED TO A FIRM EVEN SURFACE, TRUE TO GRADE AND CROSS-SECTION, AND BE MOIST WHEN CONCRETE IS PLACED.
 3. SIDEWALK SHALL HAVE CONTRACTION JOINTS AT 5' INTERVALS AND AN EXPANSION JOINT EVERY 120' MAXIMUM.
 4. A CLEAR 1' WIDE GRADE AREA WITH A MAXIMUM 1:6 SLOPE SHOULD BE PROVIDED ADJACENT TO THE SIDEWALK IN GRASS OR LANDSCAPE AREAS.
 5. IF A DROP-OFF GREATER THAN 10" THAT IS CLOSER THAN 2' FROM THE EDGE OF THE SIDEWALK OR A SLOPE STEEPER THAN 1:2 THAT BEGINS CLOSER THAN 2' FROM THE EDGE OF THE SIDEWALK, THEN THESE AREAS SHOULD BE CONSIDERED HAZARD AND SHIELDED WITH A RAILING, FENCE OR OTHER APPROVED BARRIER IN COMPLIANCE WITH FDM 222.4 LATEST EDITION.
 6. SIDEWALKS SHALL HAVE TOOLED EDGES.
 7. CONSTRUCTION JOINTS SHALL BE LOCATED AT STRUCK JOINTS OR EXPANSION JOINTS ONLY.
 8. SIDEWALKS LOCATED WITHIN FDOT RIGHT OF WAY SHALL COMPLY WITH FDOT STD. PLANS INDEX #522-001 AND CORRESPONDING SPECIFICATIONS.


TYPICAL SIDEWALK SECTION
NTS

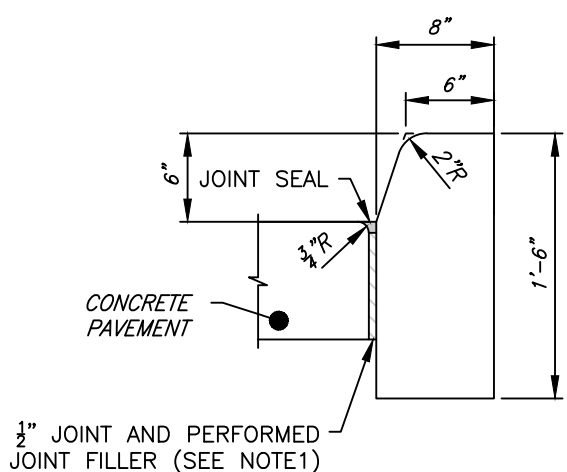


TYPE 'D' CURB DETAIL
NTS

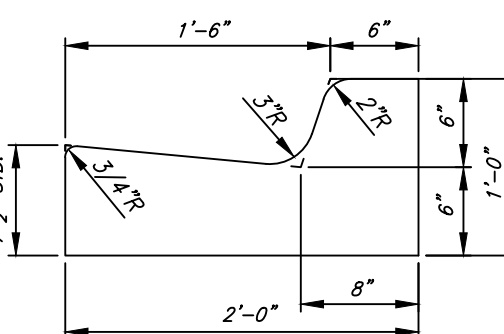


TYPE 'F' CURB DETAIL
NTS

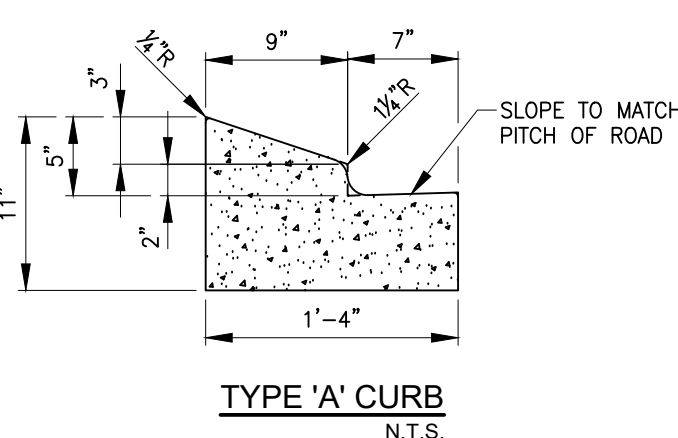

TYPE 'A' CURB
NTS

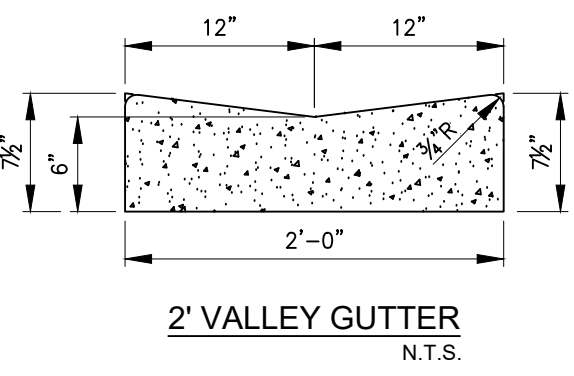

2' VALLEY GUTTER
NTS


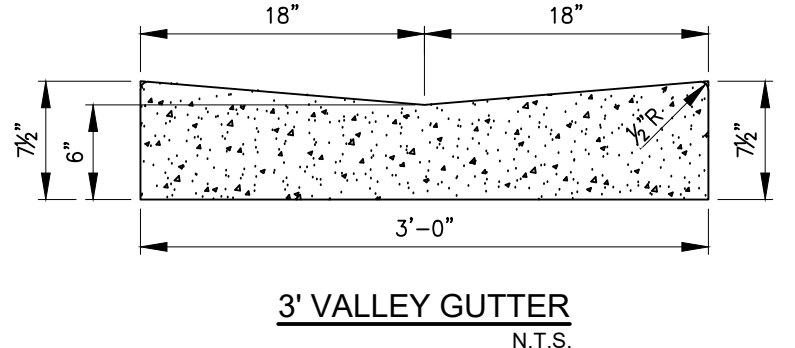


3' VALLEY GUTTER
NTS


CURB NOTES:

1. ALL CONCRETE SHALL HAVE A COMPRESSIVE STRENGTH OF 3,000 PSI IN 28 DAYS, UNLESS OTHERWISE NOTED.
2. ALL EXPANSION JOINTS SHALL BE CONSTRUCTED WITH 1/2" BITUMINOUS IMPREGNATED EXPANSION JOINT MATERIAL.
3. AN EXPANSION JOINT SHALL BE PLACED AT THE END OF ALL RETURNS & AT INTERVALS NOT TO EXCEED 50' WITH CONTRACTION JOINTS AT 10' MAX. INTERVALS BETWEEN.

REFERENCE:
FDOT ROADWAY AND TRAFFIC DESIGN STANDARDS INDEX NO. 520-001 AS APPLICABLE.

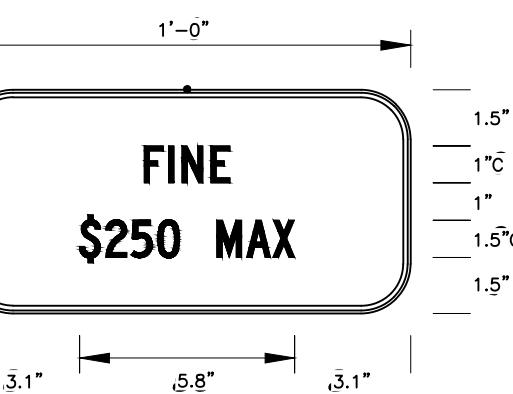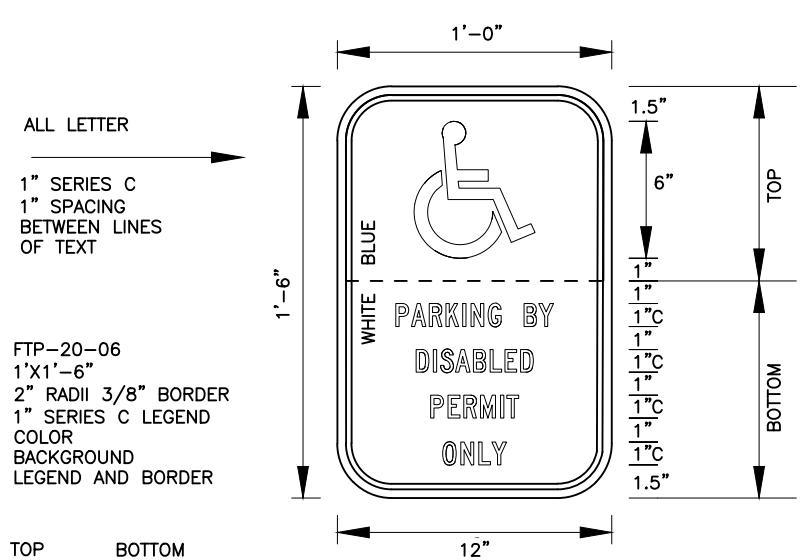


ACCESSIBLE SIGN DETAIL

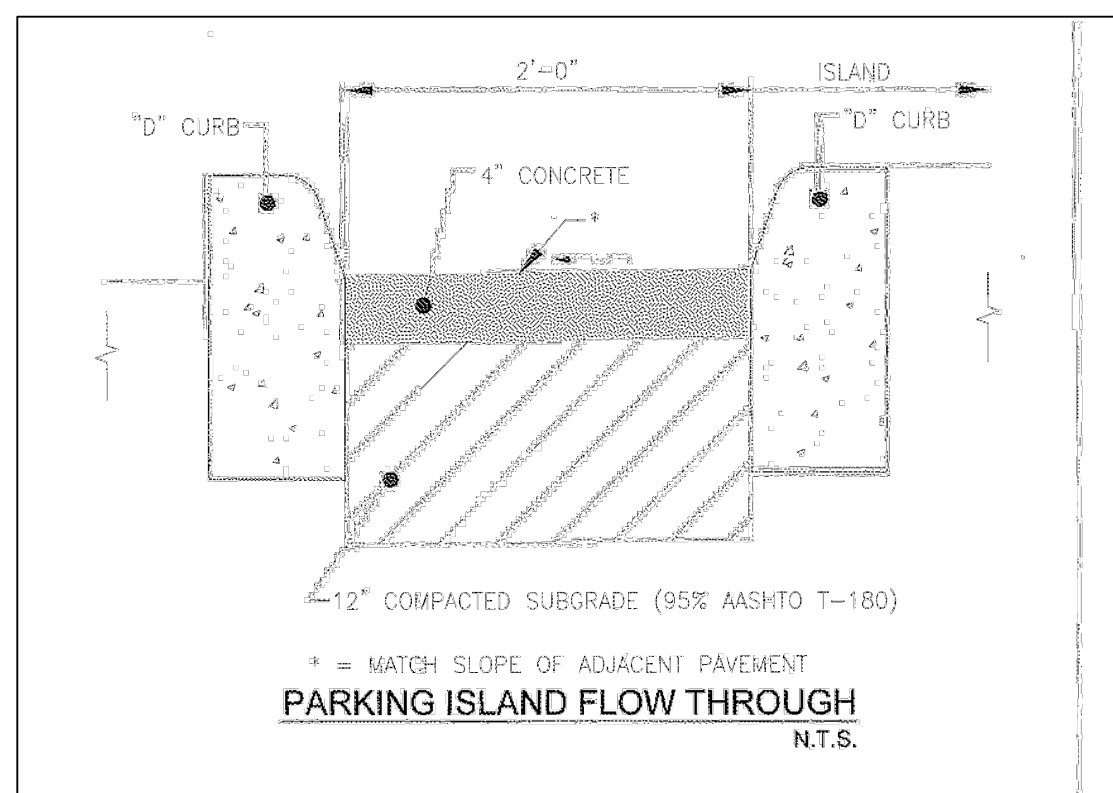

PARKING ISLAND FLOW THROUGH
NTS


**TOWN OF FT. MYERS BEACH
STANDARD DETAIL NO. 10.51
A.D.A. ACCESSIBLE / STANDARD PARKING DETAIL**

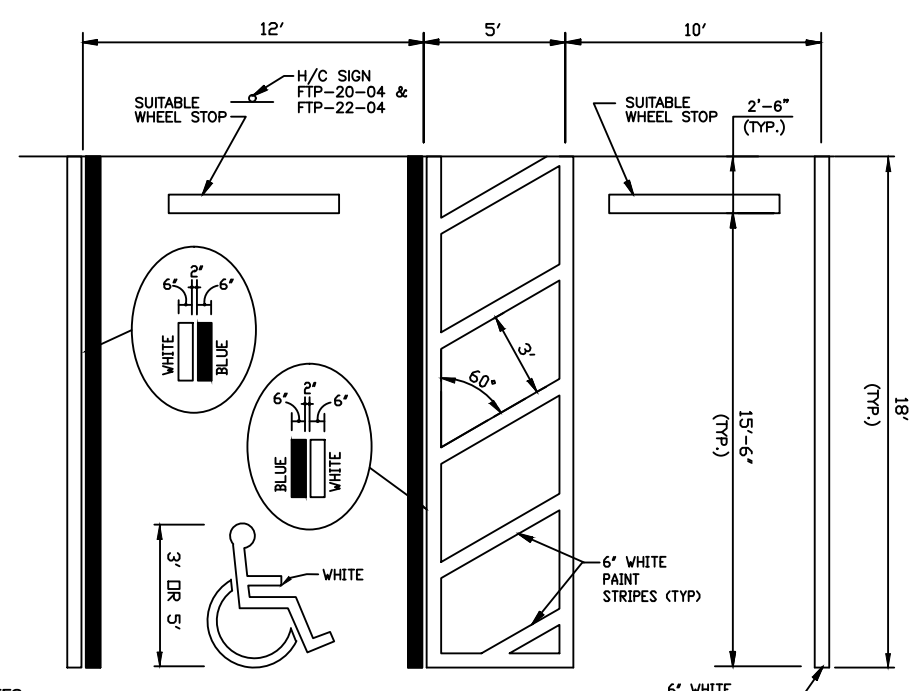


- NOTES:**
1. DIMENSIONS ARE TO CENTERLINE OF MARKINGS.
 2. BLUE PAINT MARKINGS SHALL BE TINTED TO MATCH 15180 OF FEDERAL STANDARDS 595c.
 3. THE FTP-22-04 PANEL SHALL BE MOUNTED BELOW THE FTP-20-06 SIGN.

DATE: 08/06/14

NOT TO SCALE

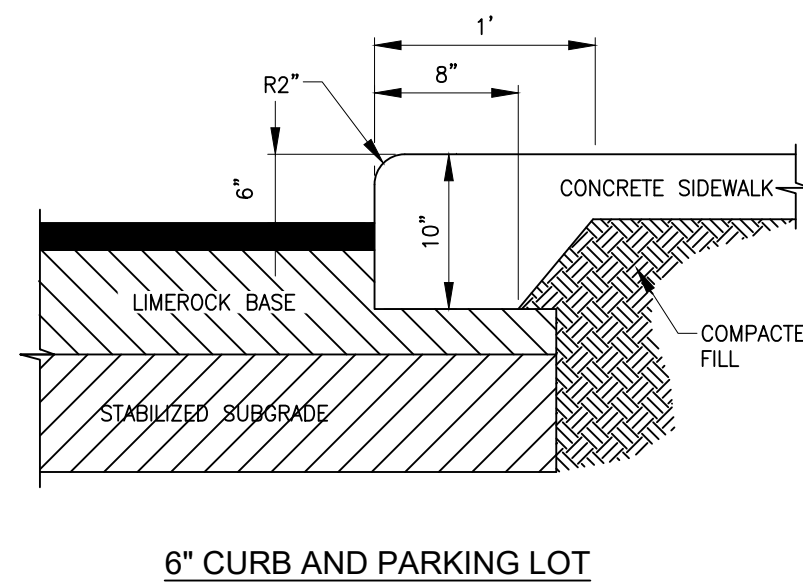


6" CURB AND PARKING LOT
NTS

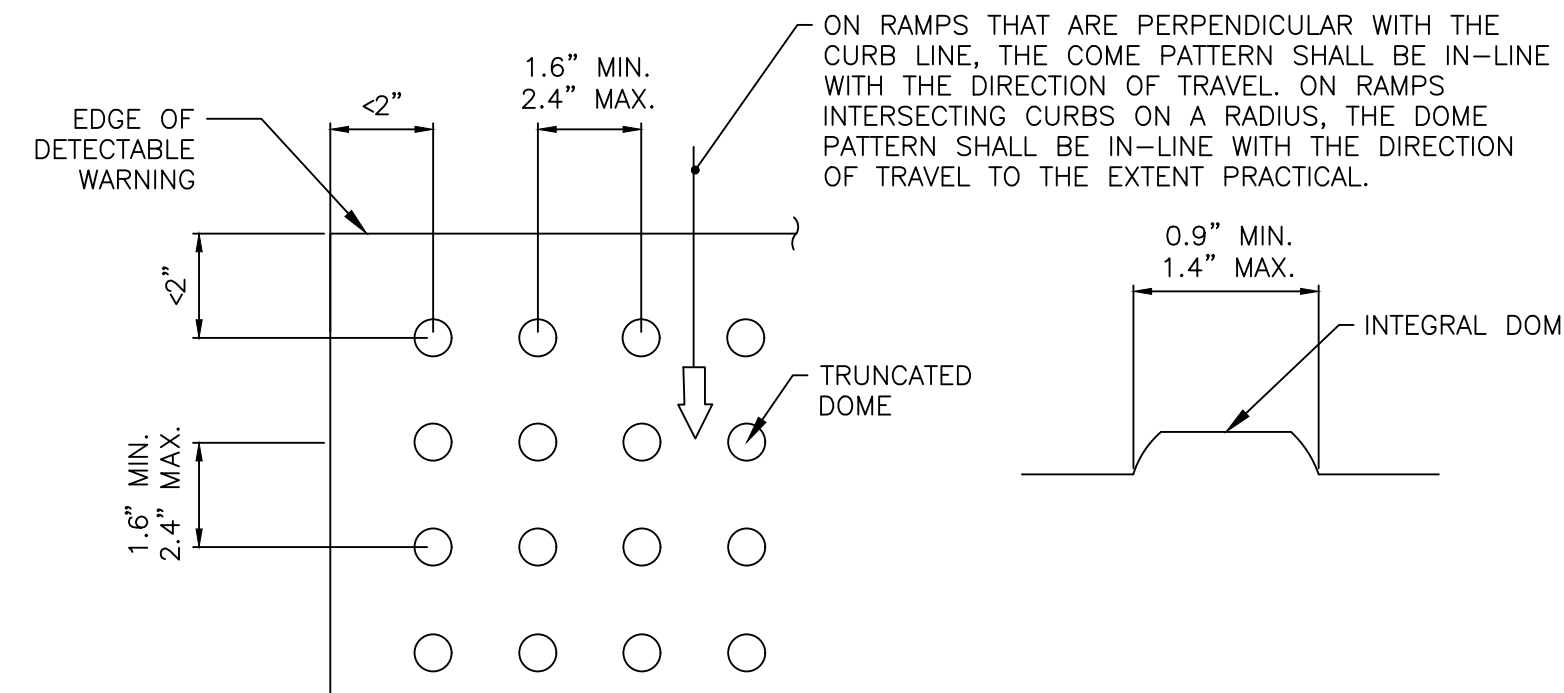


PLAN VIEW

ALL SIDEWALK CURB RAMPS SHALL HAVE DETECTABLE WARNING SURFACES THAT EXTEND THE FULL WIDTH OF THE RAMP AND IN THE DIRECTION OF TRAVEL 24 INCHES (610 MM) FROM THE BACK OF CURB.


CURB RAMP DETECTABLE WARNING DETAIL
NTS

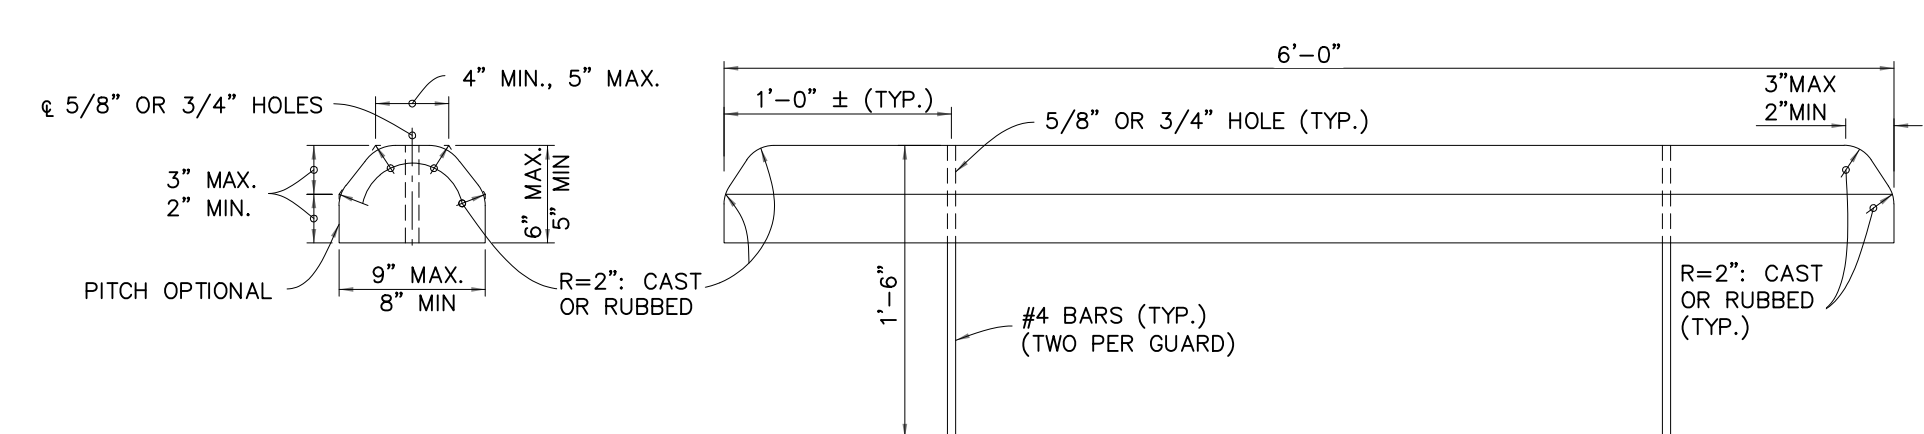

CONCRETE BUMPER GUARD
NTS

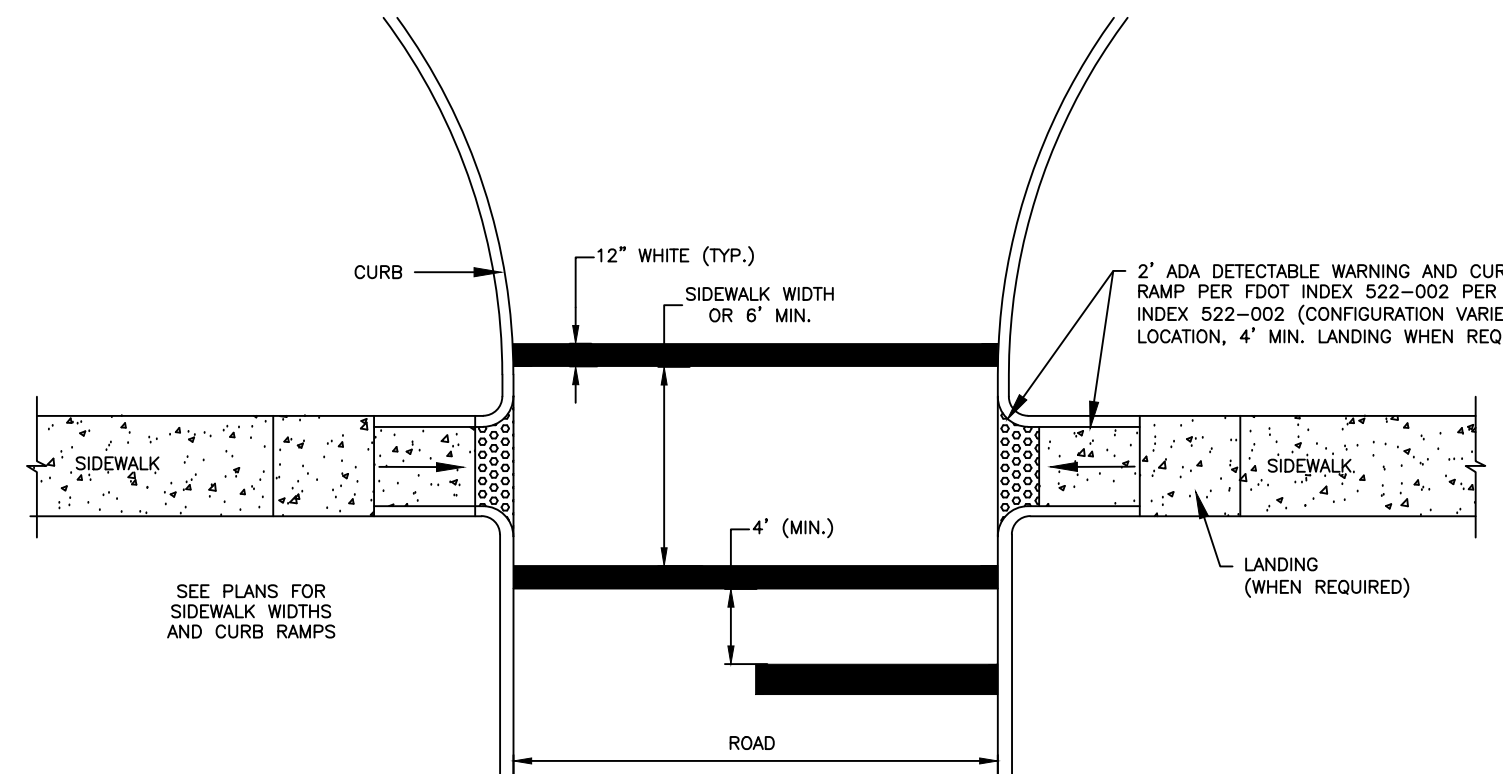


CROSSWALK DETAIL
PER FDOT INDEX 711-001 N.T.S.

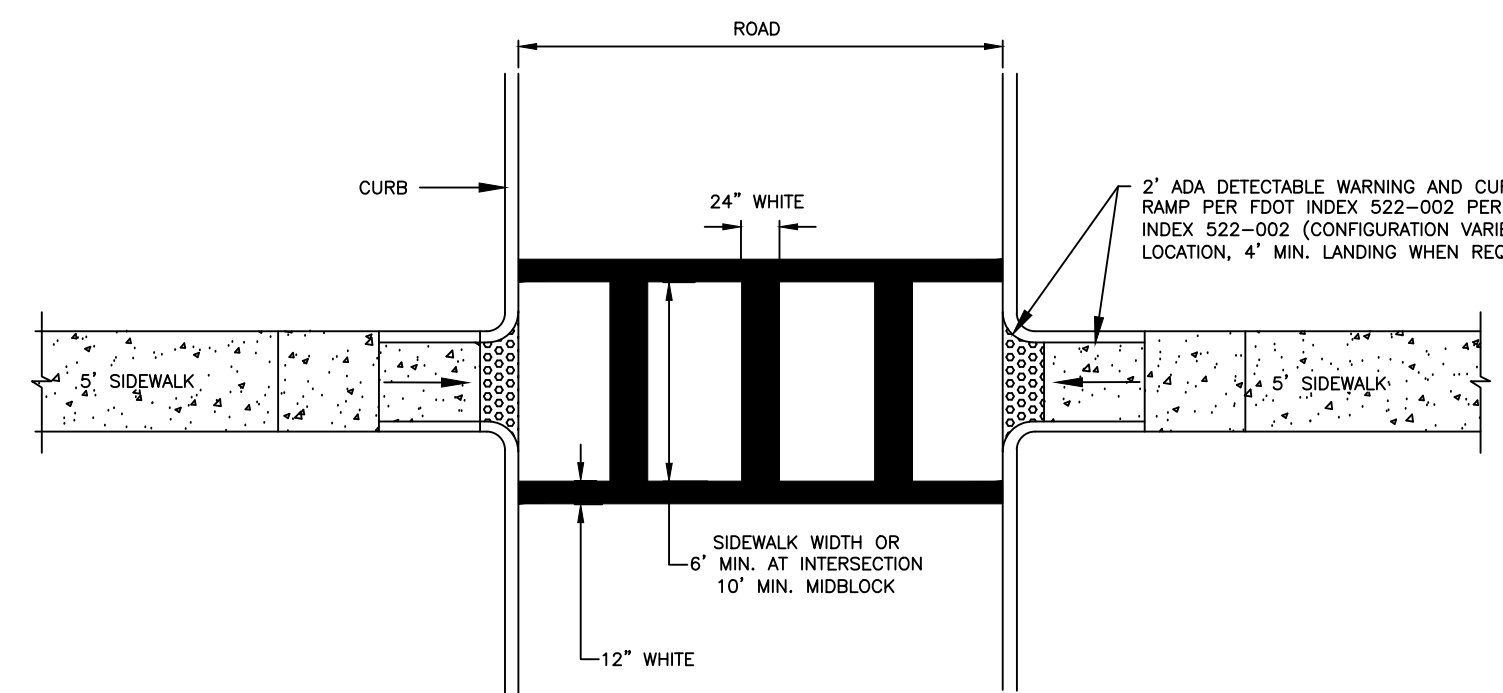

SPECIAL EMPHASIS CROSSWALK DETAIL
PER FDOT INDEX 711-001 N.T.S.


TYPICAL ASPHALT SECTION
NTS

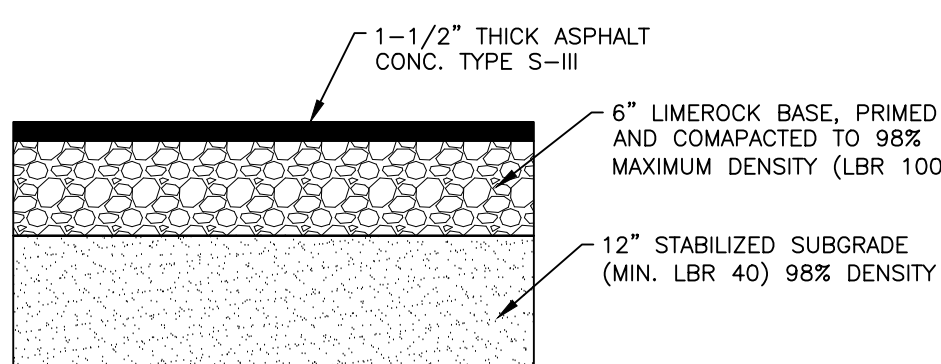

1. ASPHALTIC CONCRETE PAVEMENT (TYPE S-III) SHALL BE CONSTRUCTED AFTER SUBSTANTIAL COMPLETION OF BUILDING CONSTRUCTION.
2. 5-1/2" LIMEROCK BASE MATERIAL MAY BE SUBSTITUTED AS AN ALTERNATE DESIGN TO THE 12" STABILIZED SUBGRADE. ALL SPECIFICATIONS FOR LIMEROCK BASE MATERIAL SHALL BE ADHERED TO.
3. ALTERNATE PAVEMENT SECTIONS UTILIZING MATERIALS INCLUDING PAVER BLOCKS AND BOMANITE MAY BE SUBSTITUTED FOR THE ABOVE SYSTEMS. STRUCTURAL CHARACTERISTICS MUST MEET MINIMUM COLLIER COUNTY L.D.C. REQUIREMENTS.
4. LIMEROCK BASE MUST EXTEND 6" BEYOND EDGE OF PAVEMENT.
5. SUBGRADE MUST EXTEND 12" BEYOND EDGE OF PAVEMENT.

TYPICAL ASPHALT SECTION
NTS

**TOWN OF FT. MYERS BEACH
STANDARD DETAIL NO. 10.18
BOLLARD POST DETAIL**

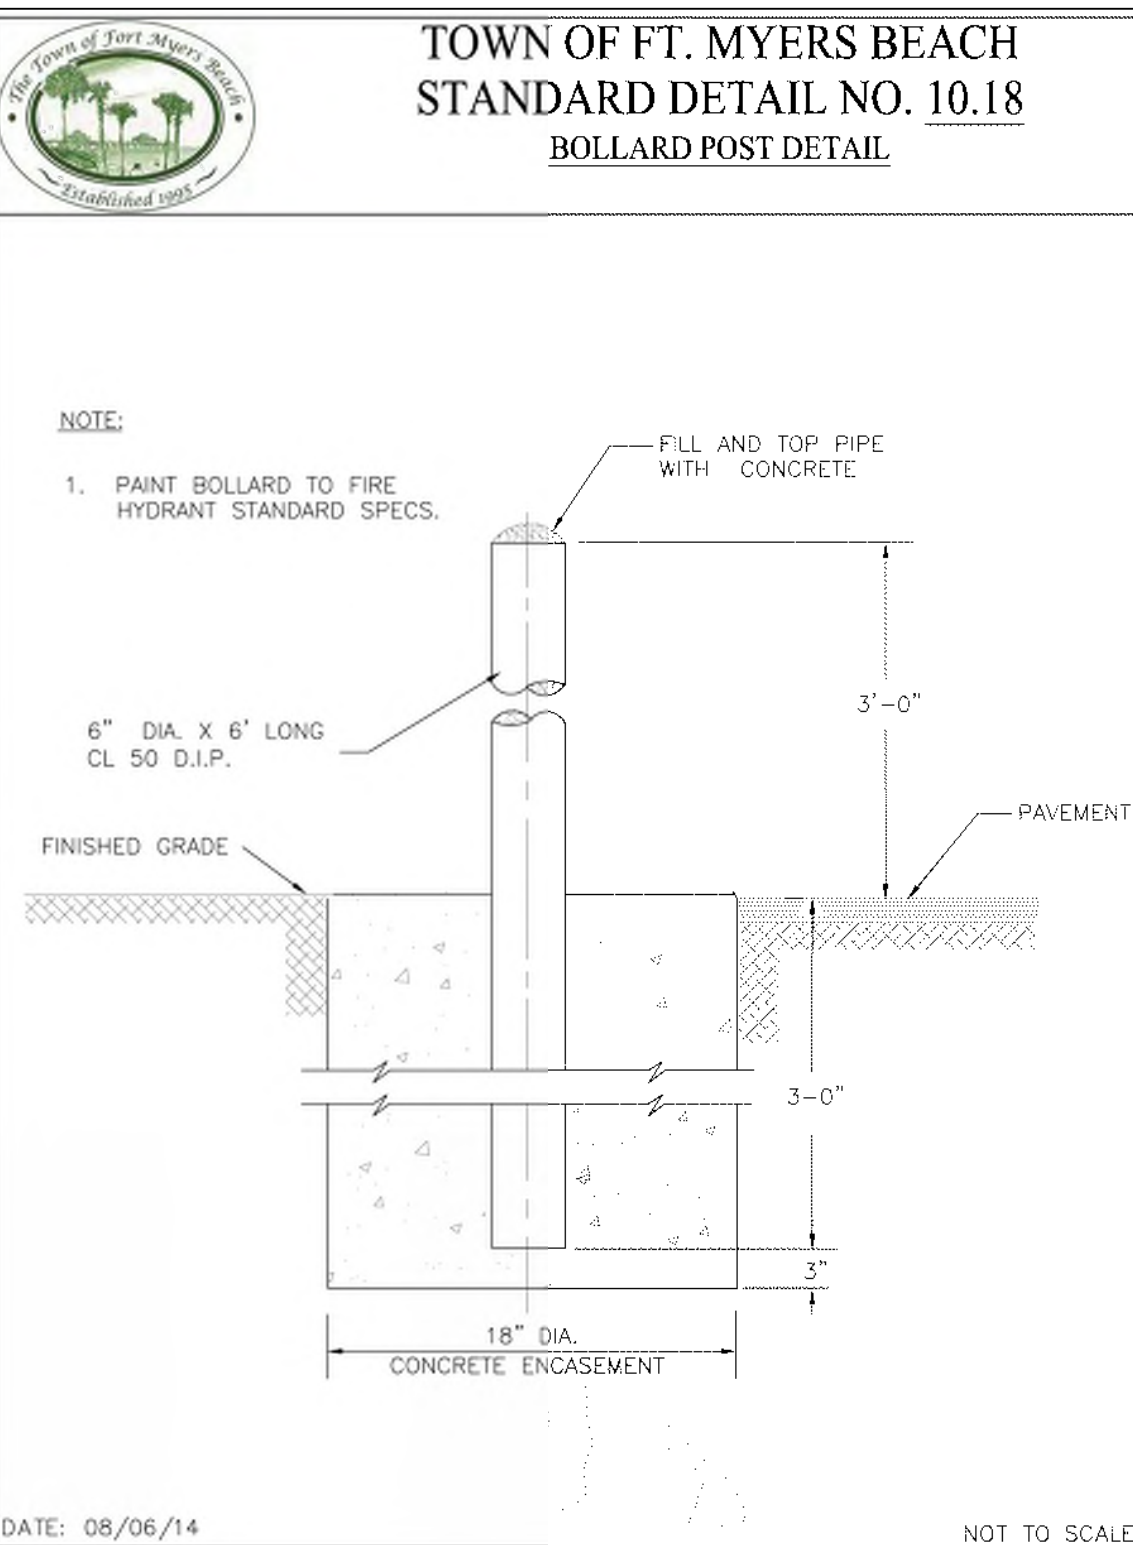


- NOTE:**
1. PAINT BOLLARD TO FIRE HYDRANT STANDARD SPECS.

DATE: 08/06/14

NOT TO SCALE

**TOWN OF FT. MYERS BEACH
STANDARD DETAIL NO. 10.48
CURB ACCESS WITH HANDICAPPED RAMP**

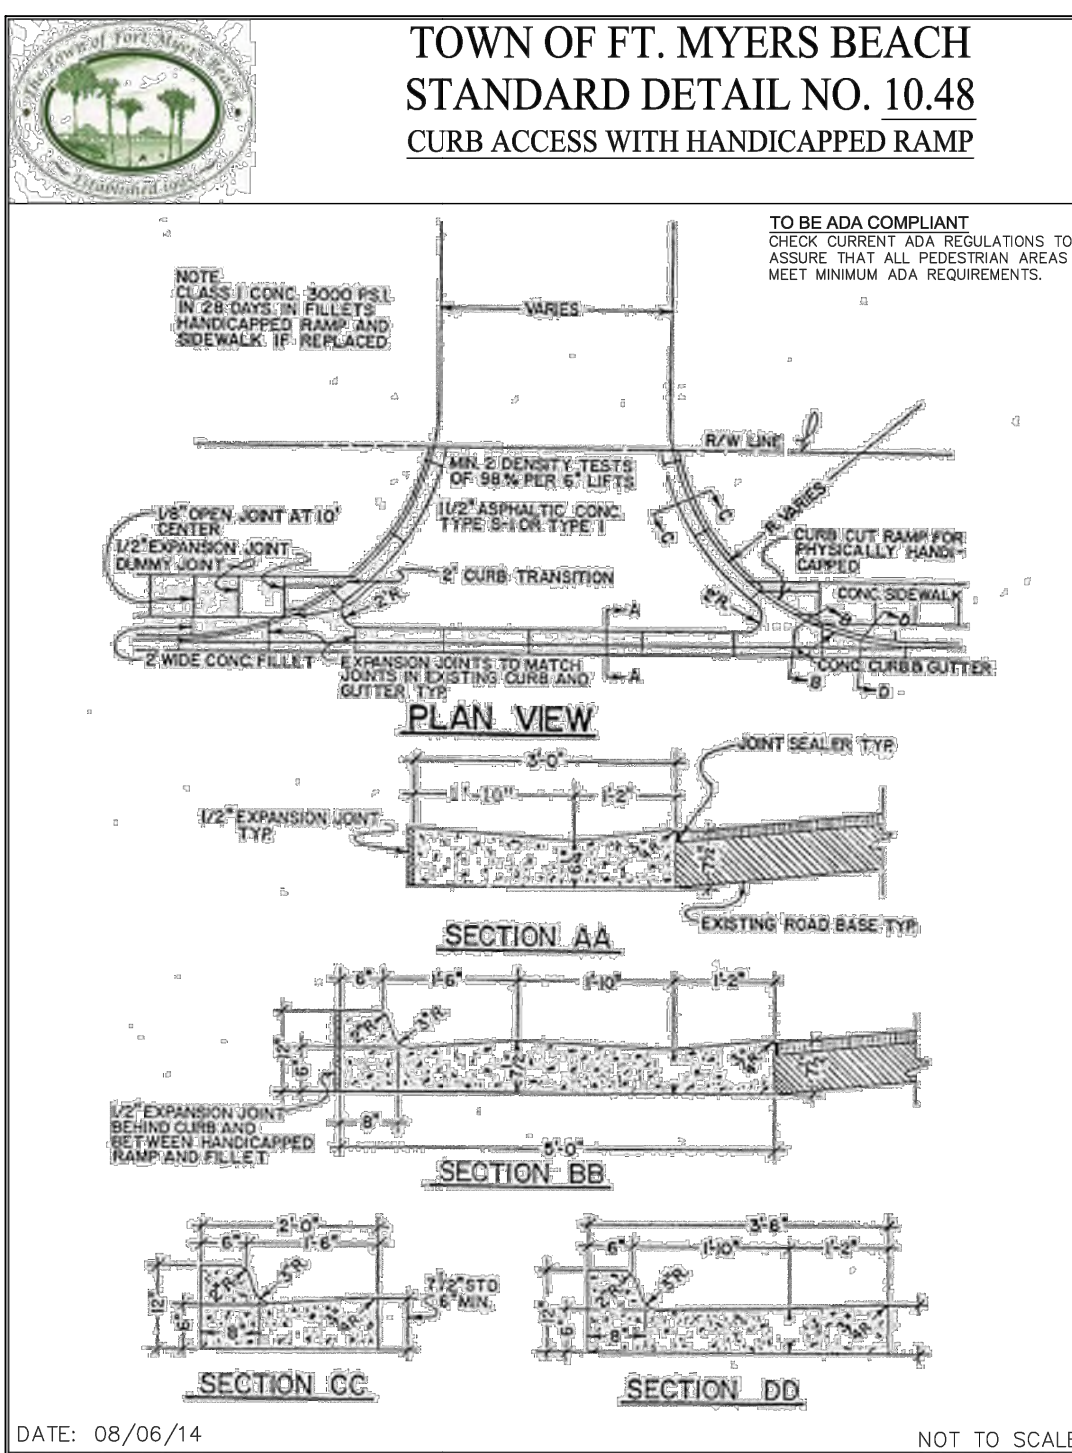

DATE: 08/06/14

NOT TO SCALE

CHURCH OF THE ASCENSION

SITE CONSTRUCTION DETAILS



DATE: 08/06/14
ALL ELEVATIONS SHOWN REFERENCE NORTH AMERICAN VERTICAL DATUM 1988 (NAVD88) CONVERSION FACTOR TO NATIONAL GEODETIC VERTICAL DATUM 1929 (NGVD29) IS (+) 1.184

RDA CONSULTING ENGINEERS, LLC.

NAPLES OFFICE: 791 10TH STREET SOUTH, SUITE 300, NAPLES, FL 34102
PHONE: (239) 649-1551

BONITA SPRINGS OFFICE: 8000 HEALTH CENTER BLVD., SUITE 200, BONITA SPRINGS, FL 34135
FAX: (239) 649-7112

ORLANDO OFFICE: 801 INTERNATIONAL PKY., SUITE 500, LAKE MARY, FL 32746
WWW.RDAFL.COM

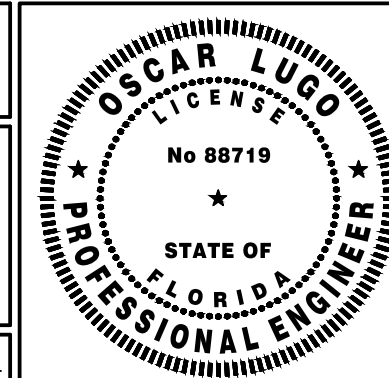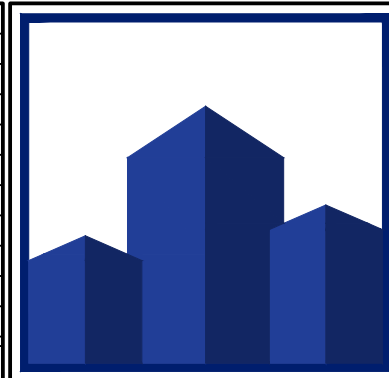

ENGINEER'S STAMP

OSCAR LUGO, P.E.
FL. LICENSE NO. 88719
COA #31149

This item has been digitally signed and sealed by Oscar Lugo, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic documents.

SCALE: AS NOTED	PROJECT No: 250219
CHECKED BY: O.L.	DATE: SEPTEMBER 2025
DESIGNED BY: C.G.K./J.H.	SHEET: 9
DRAWN BY: C.G.K.	of 14

GENERAL NOTES

- These inlets are suitable for slopes and curbside areas and are to be installed, unless the owner desires to incorporate traffic loadings but are not to be placed on areas subject to heavy wheel loads.
- Inlets installed in sidewalk areas should be constructed without aprons. Inlets installed in areas subject to traffic loadings should have aprons. The aprons should be constructed to meet the same requirements as the inlets. The aprons should be constructed to meet the same requirements as the inlets. The aprons should be constructed to meet the same requirements as the inlets.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.
- Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated. Steel grates are to be used on all inlets where slope traffic is anticipated.

INLETS

CAST IRON GRATES

TYPE C
Approx. Weight 225 Lbs.

TYPE D
Approx. Weight 225 Lbs.

TYPE E
Approx. Weight 225 Lbs.

TYPE H
Approx. Weight 225 Lbs.

CAST IRON GRATES

STEEL GRATES


TYPE C
Approx. Weight 225 Lbs.

TYPE D
Approx. Weight 225 Lbs.

TYPE E
Approx. Weight 225 Lbs.

TYPE H
Approx. Weight 225 Lbs.

DATE: 08/06/14

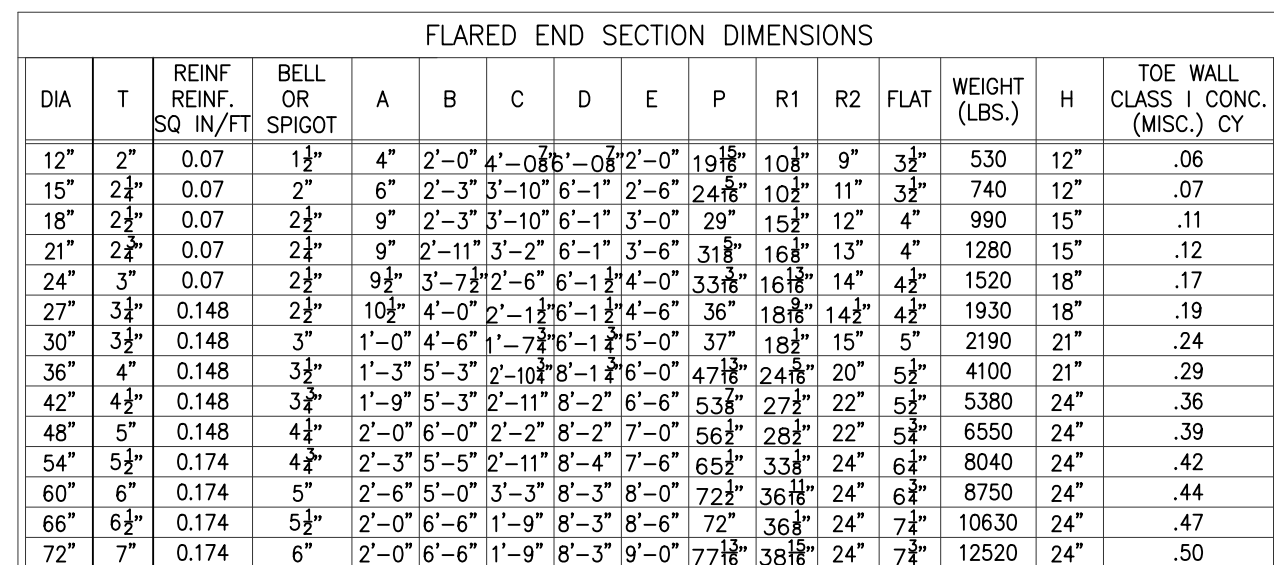

EX. SECTION A

WEIR WALL: 8 BAGS HIGH, 2 BAGS LONG, 1 BAG WIDE
 TOP OF RIPRAP: EL = 1.00
 WEIR SPILLWAY: EL = 2.64', 8 BAGS HIGH, 2 BAGS LONG, 4 BAGS WIDE
 TOP OF WEIR: EL = 3.67' (MIN)
 DRILL EX. BAGS AND ADD REBAR AND ADDITIONAL BAGS AS NEEDED
 TOP OF FOOTER: EL = 0.00, 3 BAGS HIGH, 5 BAGS LONG, 7 BAGS WIDE
 0.330" PVC INV = 1.6' (CONTROL ELEVATION)
 FILL THIS AREA WITH BAGS TO FILL GAP
 MATCH EX. GRADE: ±4.1'

EX. SECTION B

WEIR WALL: 11 BAGS HIGH, 2 BAGS LONG, 1 BAG WIDE
 TOP OF RIPRAP: EL = 1.60
 0.428" PVC INV = 1.6'
 TOP OF RIPRAP: EL = 1.00
 FOOTER: 3 BAGS HIGH, 5 BAGS LONG, 7 BAGS WIDE
 18" LONG #4 REBAR VERTICAL @ TOP BAG THROUGH NEXT BAGS DOWN

EX. PLAN VIEW

EX. MINIMUM PERIMETER EL: 4.24
 EX. EDGE OF WATER (LAKE)
 LAKE
 CONTROL EL: 1.60'
 EX. TOP OF BANK EL: 3.00'
 PROP 2' DEEP DRAINAGE SWALE SLOPES AND BOTTOM TO BE SODDED
 EL: 4.20'
 BOT = 1.6'
 8"-12" RIPRAP ON BOTTOM AND SIDE SLOPES WITH FILTER FABRIC
 EL: 3.50'
 CONTROL WEIR
 BOT = 1.00'
 RIPRAP (8"-12") W/ FILTER FABRIC
 MATCH EX. GRADE: ±4.5'
 EL: 1.50'
 15" HDPE PIPE FROM EAST LAKE
 EL: 1.50'
 6.25'
 6.25'
 18.0'

EX. SECTION C - SWALE TO OFFSITE NORTH LAKE

PROP 2' DEEP DRAINAGE SWALE SLOPES AND BOTTOM TO BE SODDED
 8' 3' 8'
 1000' 1000' 1000'
 1000' 1000' 1000'


EX. CONTROL WEIR AND SWALES DETAIL

N.T.S.


TYPE	C-I-P		PRECAST		H
	L	W	L	W	
C	4'-5"	3'-4"	4'-1"	3'-0"	VARIABLE
D	4'-5"	5'-5"	4'-1"	5'-1"	VARIABLE
E	5'-10"	4'-4"	5'-6"	4'-0"	VARIABLE

NOTES:


1. ALL CATCH BASINS TO BE POURED IN PLACE OR PRECAST.
2. ALL CONCRETE TO BE 4,000 PSI.
3. WHERE TO SLAB CONSTRUCTION IS NECESSARY, USE 8" THICK SLAB W/ #5 BARS AT 4" ON CENTER CONTINUOUS INTO CATCH BASIN WALLS.
4. WHERE "H" DIMENSION EXCEEDS 5 FEET, STHOP
5. CATCH BASINS TO BE CONSTRUCTED PER FDOT STANDARDS.

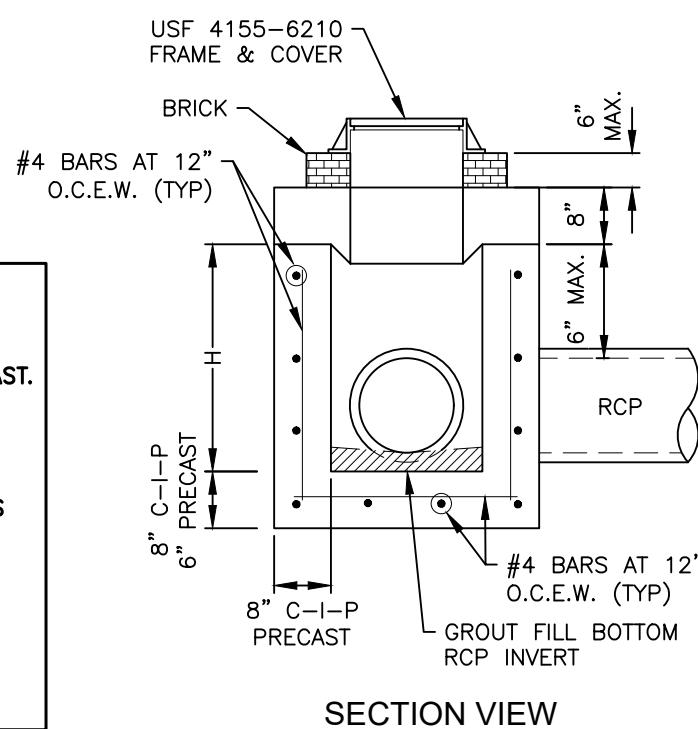

CATCH BASIN DETAIL

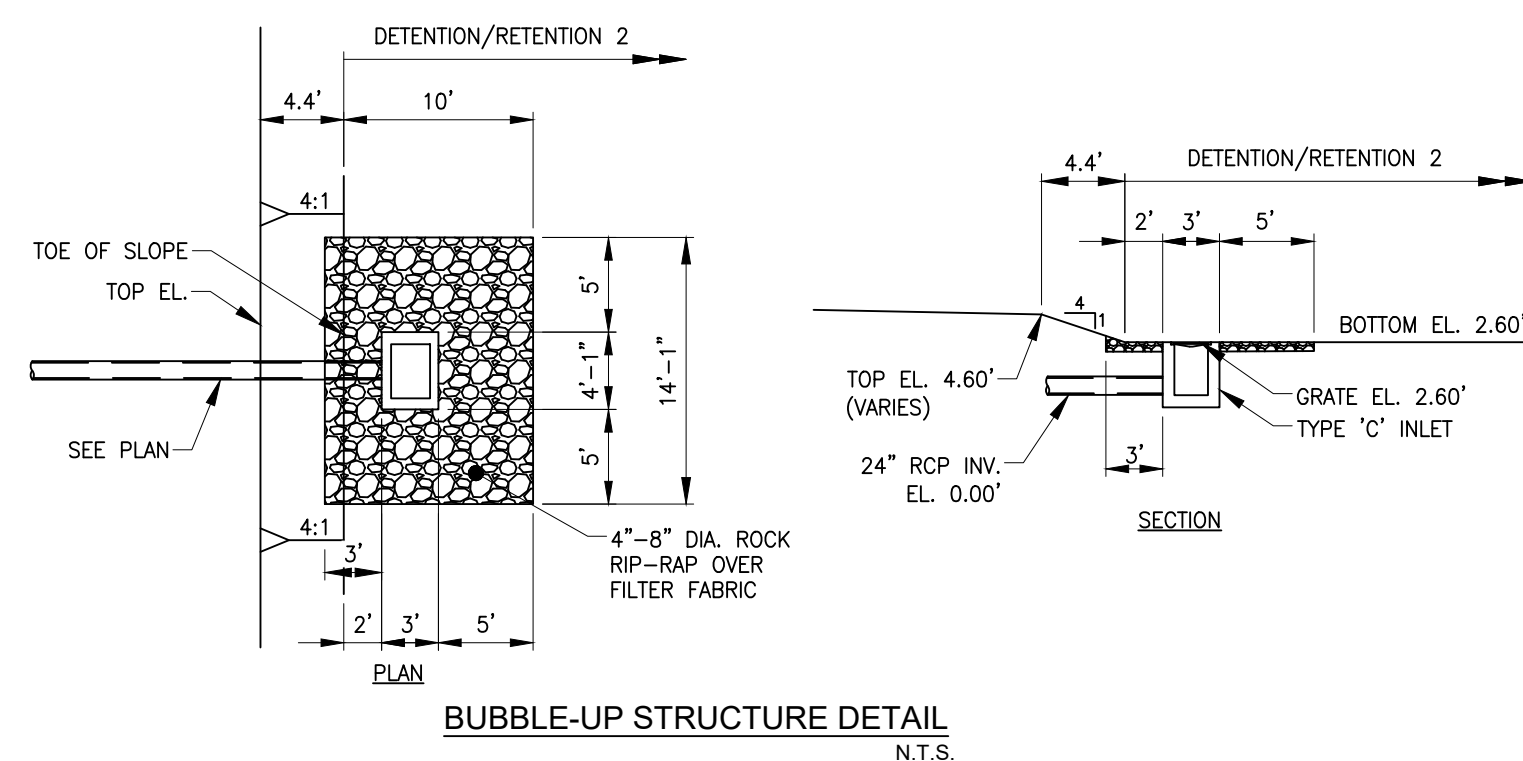




BUBBLE-UP STRUCTURE DETAIL

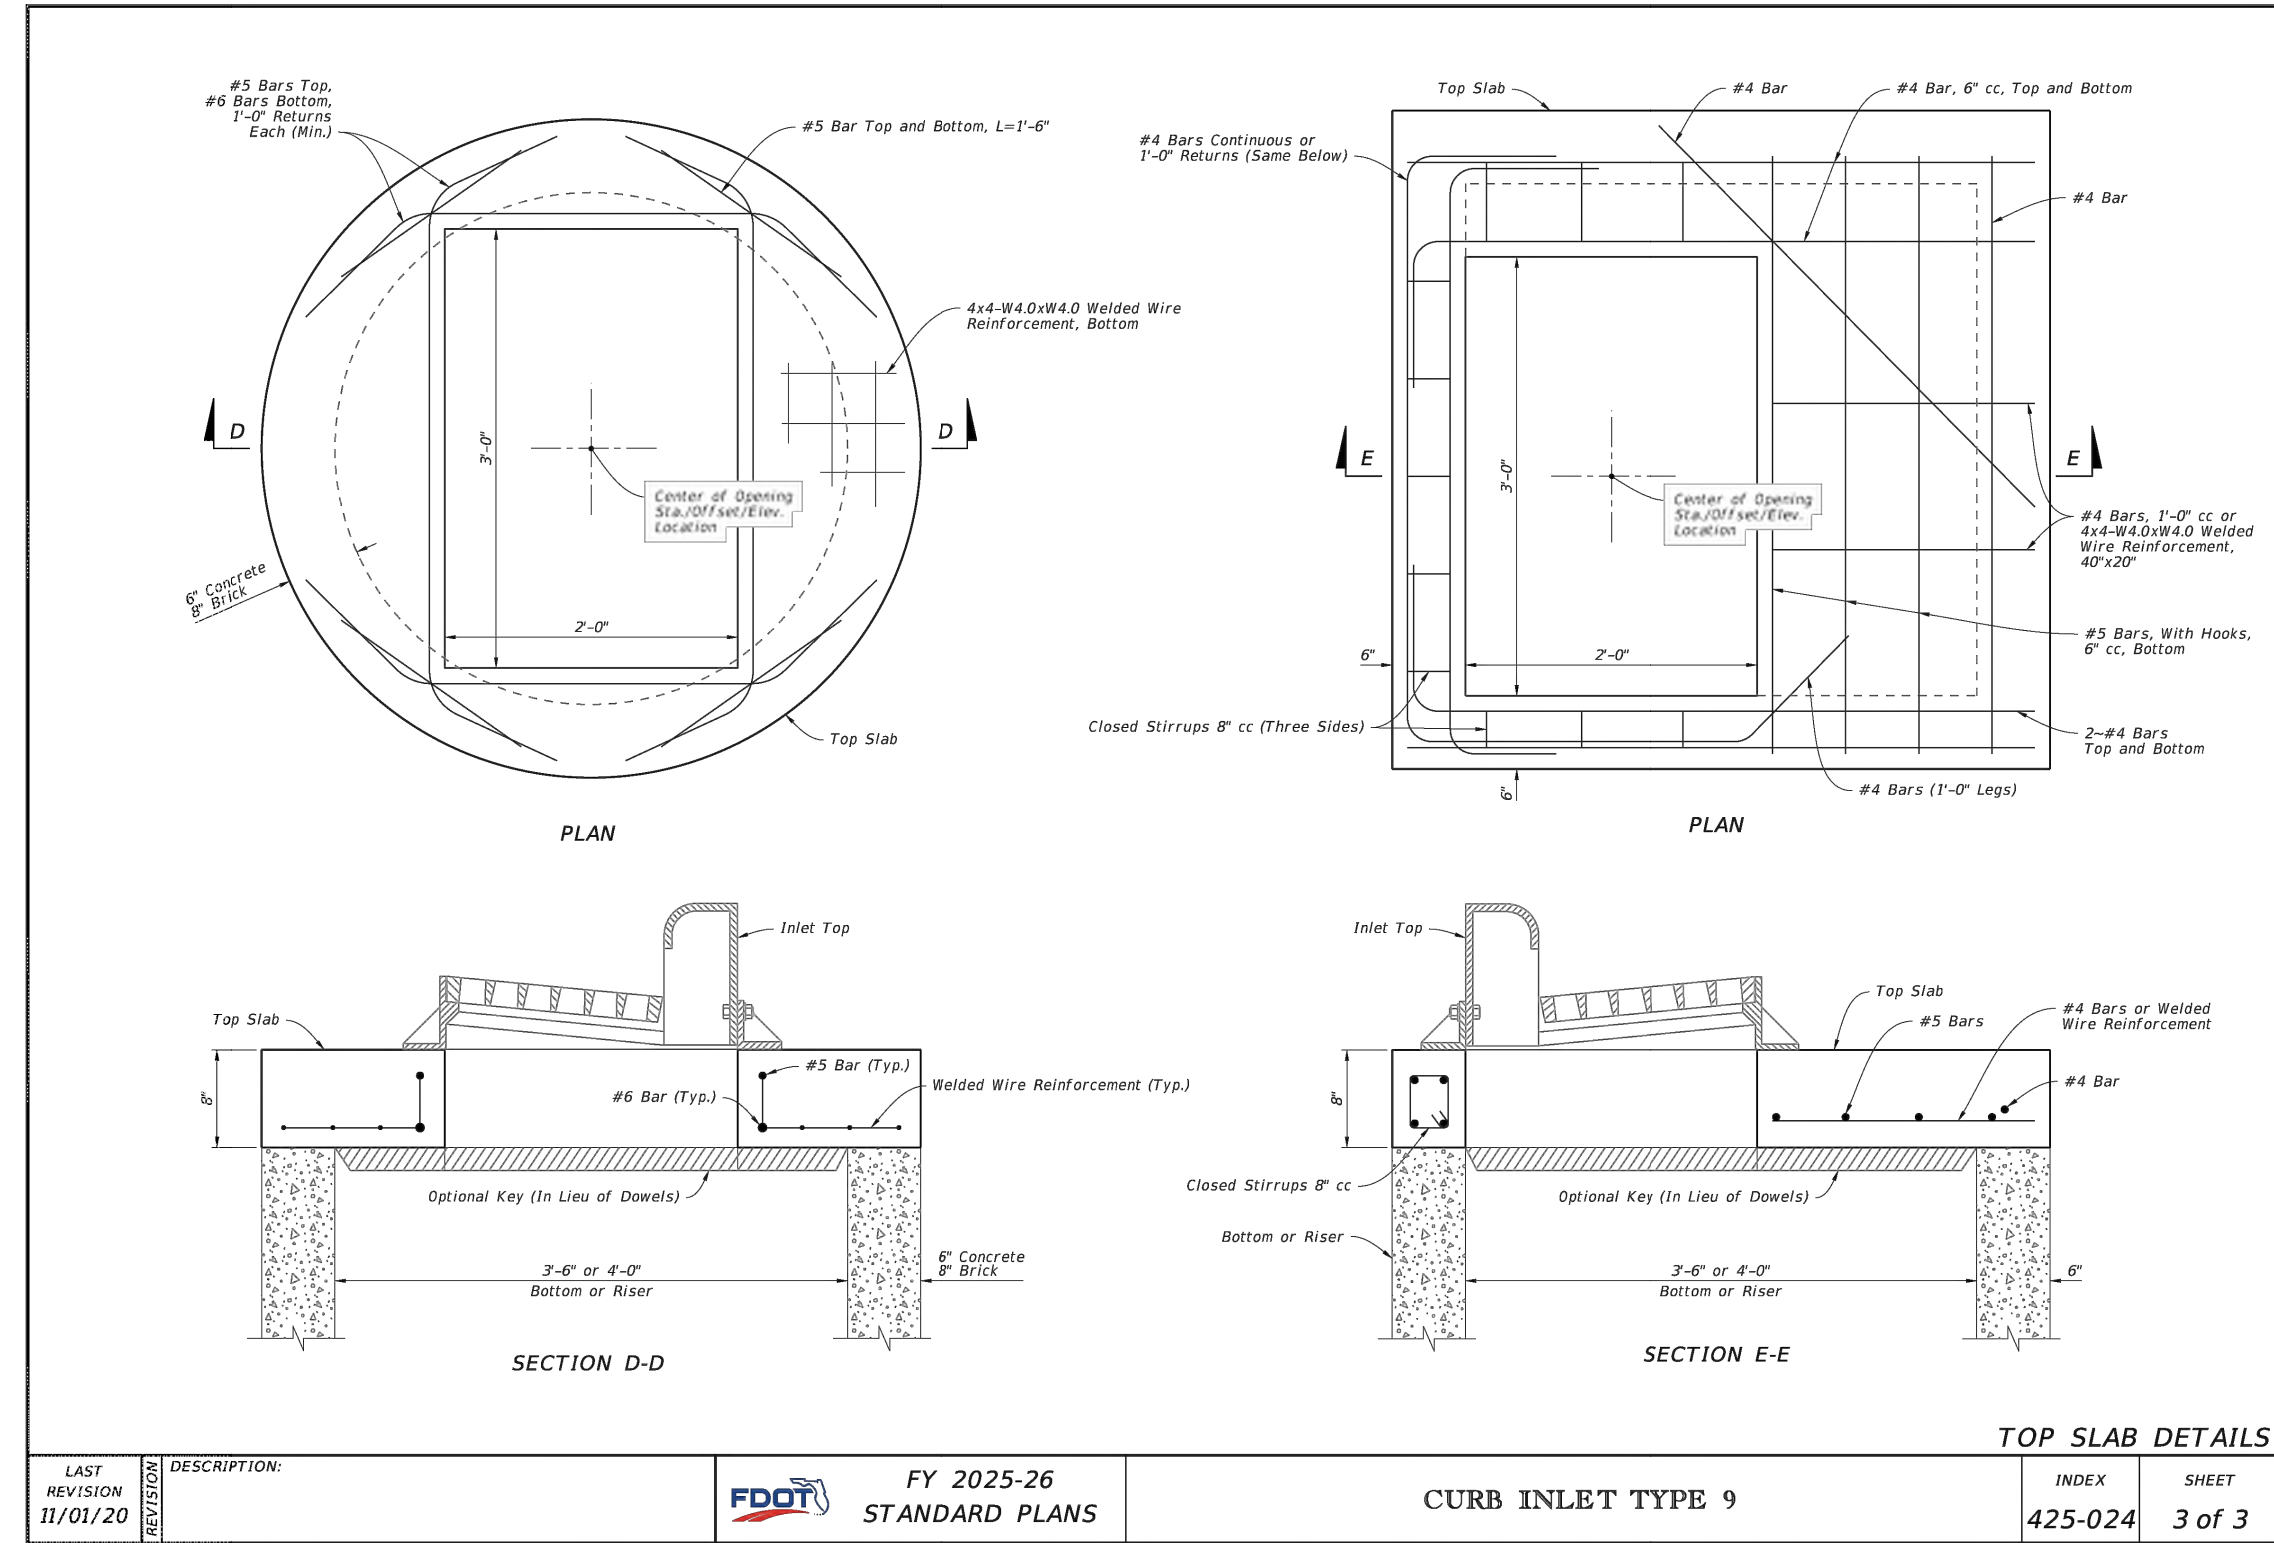

OSCAR LUGO, P.E.
FL. LICENSE NO. 88719
COA #31149

This item has been digitally signed and sealed by Oscar Lugo, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic documents.

SCALE:	AS NOTED	PROJECT No.:	250219
CHECKED BY:	O.L.	DATE:	SEPTEMBER 2025
DESIGNED BY:	C.G.K./H.H.	SHEET:	10 of 14
DRAWN BY:	C.G.K.		

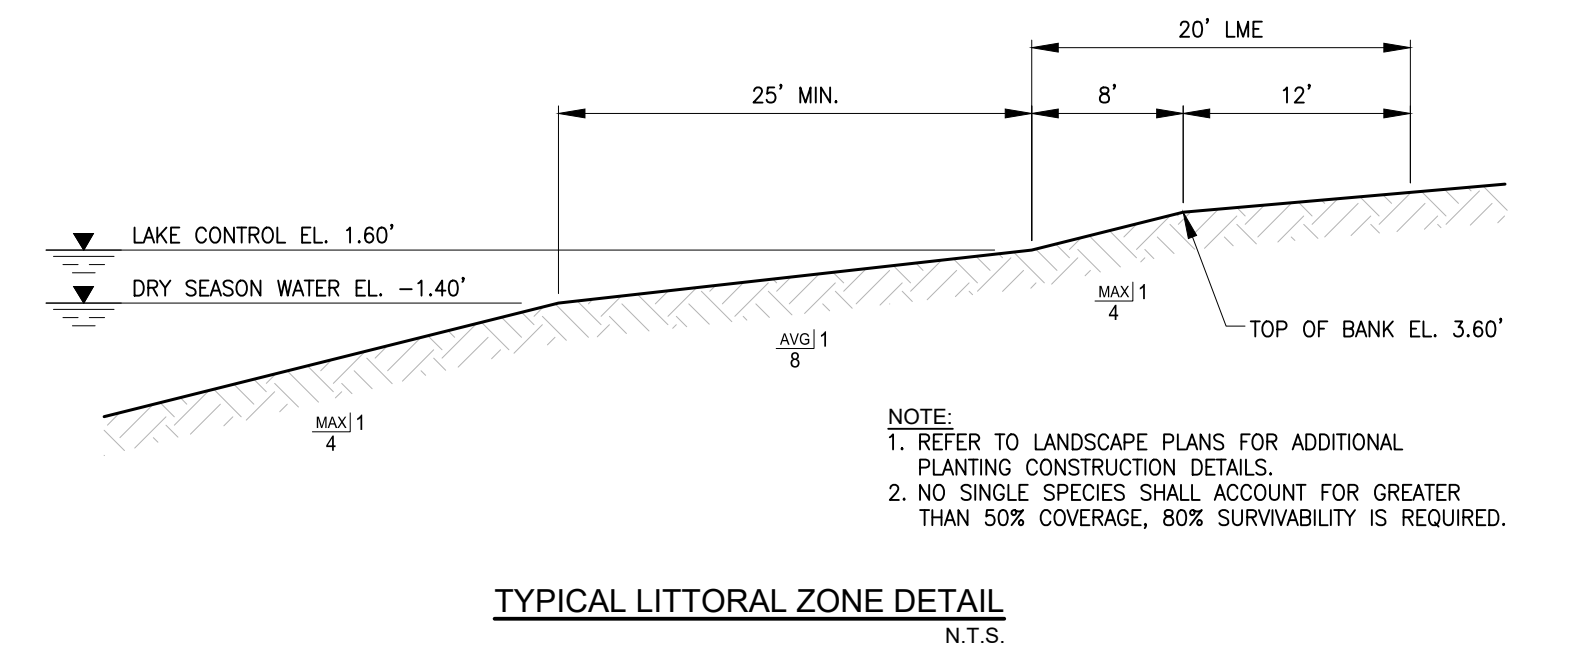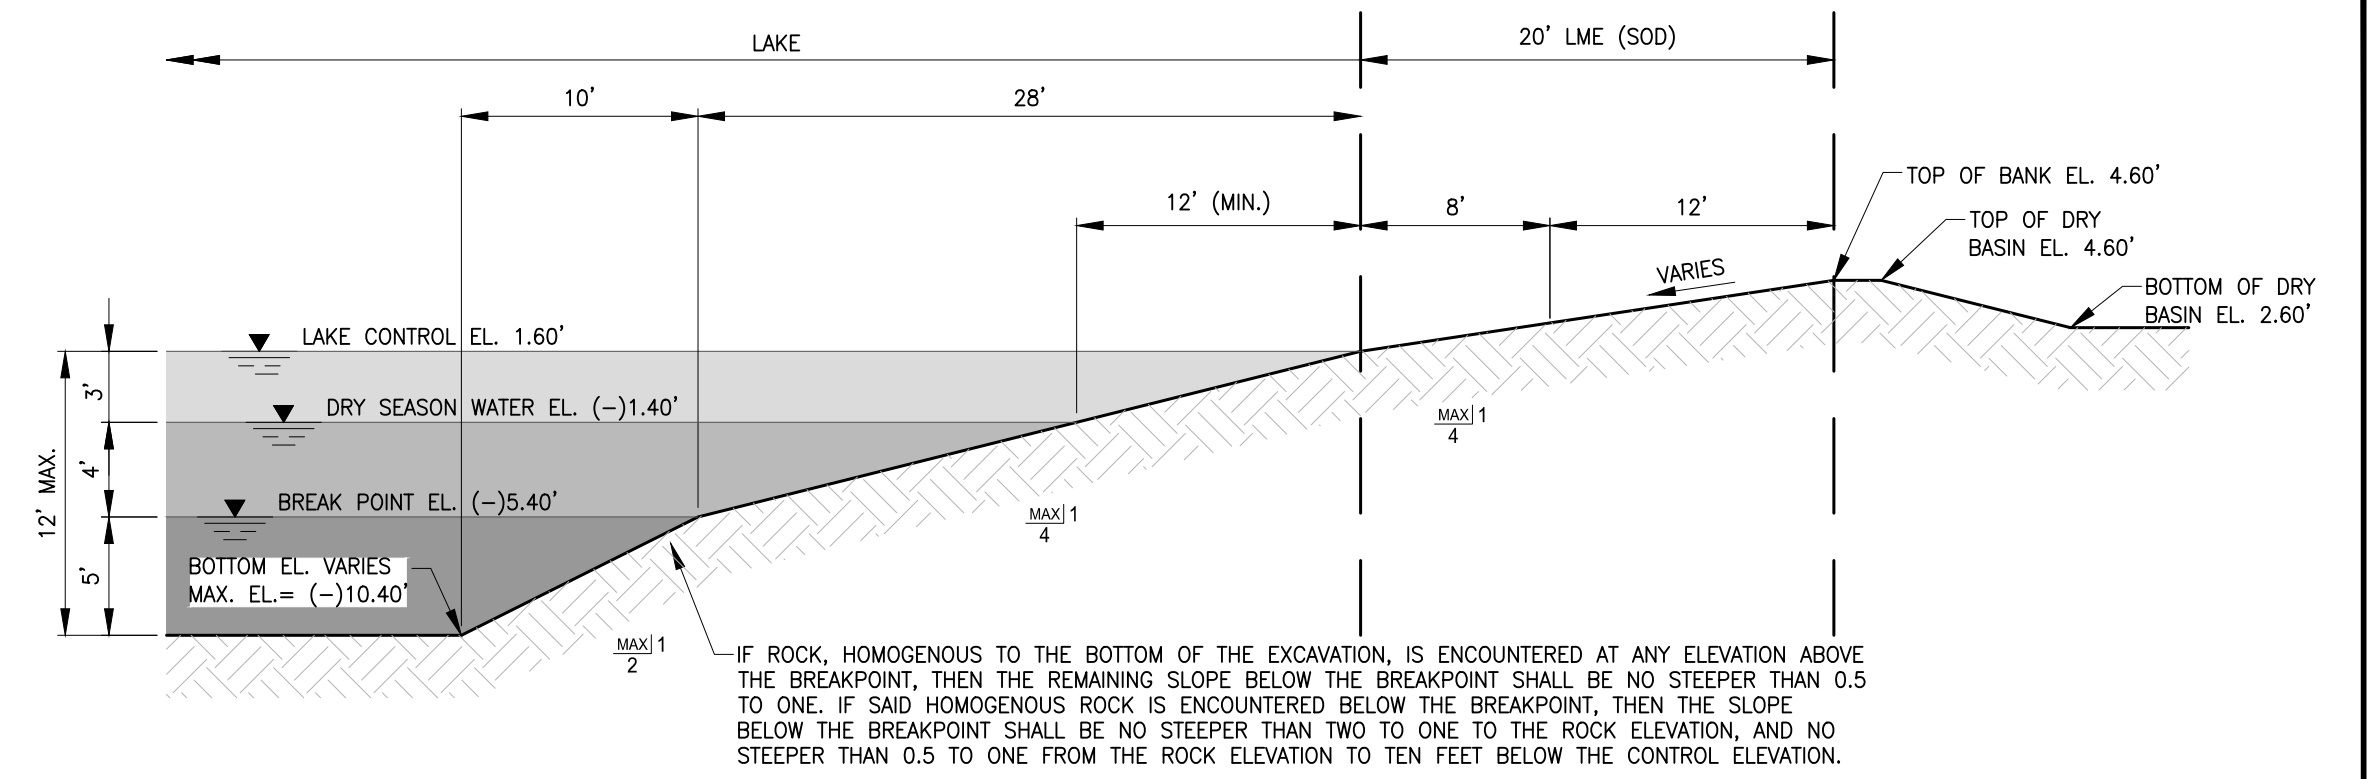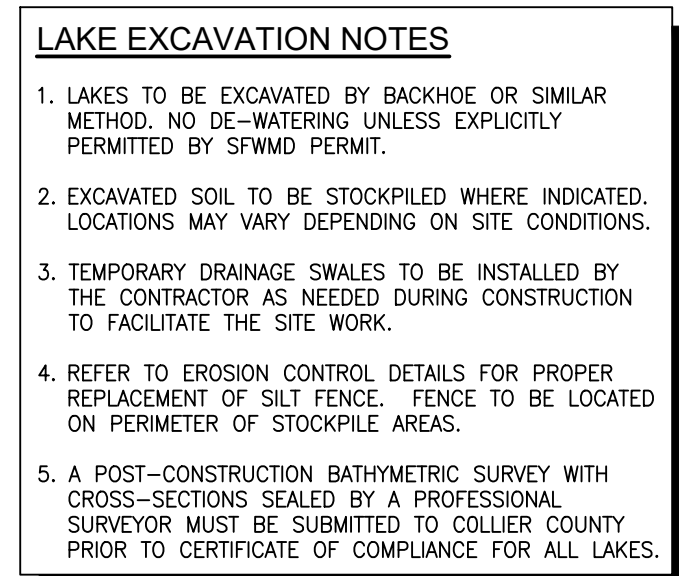[illegible]

CHURCH OF THE ASCENSION
LAKE MANAGEMENT PLAN
DATUM NOTE: ALL ELEVATIONS SHOWN REFERENCE NORTH AMERICAN VERTICAL DATUM 1988 (NAD83) CONVERSION FACTOR TO NATIONAL GEODETIC VERTICAL DATUM 1929 (NGVD29) IS (+/-) 1.164

